



Contents

Nomenclature.....	2
Accessories	2
Product Specifications.....	3
Expanded Cooling Data	5
AHRI Ratings	21
Dimensions	54
Wiring Diagram	55

Standard Features

- R-410A chlorine-free refrigerant
- Energy-efficient compressor
- Factory-installed filter drier
- Copper tube/aluminum fin coil
- Service valves with sweat connections and easy-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified
- ETL Listed

Cabinet Features

- Amana® brand louvered sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

		A	N	X	13	036	1	AA		
		1	2	3	4,5	6,7,8	9	10,11		
Brand										Engineering *
A	Amana® Brand									Major/ Minor Revisions
Product Category										* Neither revision is used for order entry or inventory management.
S	Split System									
N	Nominal Split System									
Unit Type										Electrical
C	Condenser R-22							1		208/230 V, 1 Phase, 60 Hz
X	Condenser R-410A							2		220/240 V, 1 Phase, 50 Hz
H	Heat Pump R-22							3		208/230 V, 3 Phase, 60 Hz
Z	Heat Pump R-410A							4		460 V, 3 Phase, 60 Hz
								5		380/415 V, 3 Phase, 50 Hz
Efficiency										Nominal Capacity
13	13 SEER	16	16 SEER					018		1½ Tons
14	14 SEER	18	18 SEER					024		2 Tons
								030		2½ Tons
								036		3 Tons
								042		3½ Tons
								048		4 Tons
								060		5 Tons
								061		5 Tons

ACCESSORIES

MODEL	DESCRIPTION	ANX13 018**	ANX13 024**	ANX13 030**	ANX13 036**	ANX13 042**	ANX13 048**	ANX13 060**	ANX13 061**
ABK-20	Anchor Bracket Kit [^]	X		X	X	X	X	X	X
ABK-21	Anchor Bracket Kit [^]		X						
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X	X
CSR-U-2	Hard-start Kit								
CSR-U-3	Hard-start Kit								
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X	X
LSK02A ²	Liquid Line Solenoid Kit	X	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X							
TX2N4A ²	TXV Kit	X	X						
TX3N4 ²	TXV Kit			X	X				
TX5N4 ²	TXV Kit					X	X	X	X

[^] Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.

	ANX13 0181A*	ANX13 0241A*	ANX13 0301AA-AB	ANX13 0301AC-A*	ANX13 0361AA-AB	ANX13 0361AC-A*	ANX13 0421AA-AB
CAPACITIES							
Nominal Cooling (BTU/h)	17,800	23,000	28,400	28,400	33,600	33,600	40,000
SEER / EER	13 / 11	13/11	13/11	13/11	13/11	13/11	13/11
Decibels	75	71	73	73	74	74	75
COMPRESSOR							
RLA	9.0	13.5	12.8	12.8	14.7	14.7	17.9
LRA	48	58.3	64	64	77	77	112
CONDENSER FAN MOTOR							
Horsepower	1/8	1/8	1/8	1/8	1/4	1/4	1/4
FLA	0.7	0.7	0.7	0.7	1.5	1.5	1.5
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	3/4"	3/4" ³	3/4" ³	7/8" ⁴
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	69	63	69	62	75	64	90
Shipped with Orifice Size	0.051	0.057	0.065	0.065	0.071	0.071	0.074
ELECTRICAL DATA							
Voltage/ Phase (60 Hz)	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1
Minimum Circuit Ampacity ²	12	17.8	16.7	16.7	19.1	19.1	23.9
Max. Overcurrent Protection ³	20 amps	30 amps	25 amps	25 amps	35 amps	35 amps	40 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	145	145	134	134	157	157	206

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the SNme size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

	ANX13 0421AC-A*	ANX13 0481AA-AB	ANX13 0481AC-A*	ANX13 0601AA-AB	ANX13 0601AC-A*	ANX13 0611AA-AB	ANX13 0611AC-A*
CAPACITIES							
Nominal Cooling (BTU/h)	40,000	46,000	46,000	57,000	57,000	56,500	56,500
SEER / EER	13/11	13/11	13/11	13/11	13/11	13/11	13/11
Decibels	75	76	76	77	77	77	77
COMPRESSOR							
RLA	17.9	19.9	19.9	25	25	26.4	26.4
LRA	112	109	109	134	134	134	134
CONDENSER FAN MOTOR							
Horsepower	1/4	1/4	1/4	1/4	1/4	1/4	1/4
FLA	1.5	1.5	1.5	1.5	1.5	1.5	1.5
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	7/8" ⁴	7/8" ⁴	7/8" ⁴	7/8" ⁴	7/8" ⁴	7/8" ⁴	7/8" ⁴
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	83	104	97	111	100	130	111
Shipped with Orifice Size	0.074	0.078	0.078	0.088	0.088	0.086	0.086
ELECTRICAL DATA							
Voltage/ Phase (60 Hz)	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1
Minimum Circuit Ampacity ²	23.9	26.4	26.4	32.8	32.8	34.5	34.5
Max. Overcurrent Protection ³	40 amps	45 amps	45 amps	45 amps	45 amps	60 amps	60 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	206	225	225	209	209	231	231

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the SNme size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

		OUTDOOR AMBIENT TEMPERATURE																		115°F					
		65°F						75°F						85°F						105°F					
		ENTERING INDOOR WET BULB TEMPERATURE																							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-
	S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.77	0.65	0.45	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-	18	15	12	-
	kW	1.26	1.29	1.33	-	1.35	1.38	1.42	-	1.43	1.46	1.50	-	1.50	1.53	1.57	-	1.55	1.59	1.64	-	1.60	1.64	1.69	-
	Amps	4.7	4.8	5.0	-	5.1	5.2	5.4	-	5.5	5.6	5.8	-	5.9	6.0	6.2	-	6.2	6.4	6.6	-	6.6	6.7	7.0	-
	HI PR	214	230	243	-	240	258	272	-	272	293	310	-	310	334	353	-	349	376	397	-	386	415	438	-
	LO PR	101	108	118	-	107	114	125	-	111	119	129	-	117	125	136	-	123	130	142	-	127	135	147	-
	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.66	0.46	-	0.80	0.67	0.46	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
75	kW	1.29	1.32	1.35	-	1.38	1.41	1.45	-	1.46	1.49	1.54	-	1.53	1.56	1.61	-	1.59	1.62	1.67	-	1.64	1.68	1.73	-
	Amps	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.6	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.6	6.8	-	6.8	6.9	7.2	-
	HI PR	220	237	250	-	247	266	281	-	281	302	319	-	320	344	364	-	360	387	409	-	398	428	452	-
	LO PR	105	111	122	-	111	118	128	-	115	122	133	-	121	128	140	-	126	135	147	-	131	139	152	-
	MBh	17.6	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	15.6	16.2	17.7	-	14.4	15.0	16.4	-
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	kW	1.30	1.33	1.36	-	1.39	1.42	1.46	-	1.47	1.50	1.55	-	1.54	1.58	1.62	-	1.60	1.64	1.69	-	1.66	1.69	1.74	-
	Amps	4.9	5.0	5.1	-	5.3	5.4	5.5	-	5.7	5.8	6.0	-	6.1	6.2	6.4	-	6.5	6.6	6.8	-	6.8	7.0	7.2	-
	HI PR	222	239	253	-	249	268	283	-	284	305	322	-	323	348	367	-	364	391	413	-	402	432	456	-
	LO PR	106	112	123	-	112	119	130	-	116	123	135	-	122	130	142	-	128	136	148	-	132	141	153	-
75	MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7
	S/T	0.77	0.68	0.52	0.33	0.79	0.71	0.54	0.35	0.81	0.73	0.55	0.37	0.84	0.75	0.57	0.38	0.87	0.78	0.59	0.38	0.88	0.79	0.59	0.38
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	19	15	11
	kW	1.27	1.30	1.33	1.37	1.36	1.39	1.43	1.47	1.44	1.47	1.51	1.56	1.51	1.54	1.59	1.63	1.57	1.60	1.65	1.70	1.62	1.65	1.70	1.76
	Amps	4.7	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.5	5.7	5.9	6.1	5.9	6.1	6.2	6.5	6.3	6.4	6.6	6.9	6.6	6.8	7.0	7.3
	HI PR	216	232	245	256	242	260	275	287	275	296	313	326	314	337	356	372	353	380	401	418	390	419	443	462
	LO PR	103	109	119	127	108	115	126	134	113	120	131	139	118	126	137	146	124	132	144	153	128	136	149	159
	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1
	S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.82	0.62	0.40
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
75	kW	1.30	1.33	1.36	1.41	1.39	1.42	1.46	1.51	1.47	1.50	1.55	1.60	1.54	1.58	1.62	1.67	1.60	1.64	1.69	1.74	1.66	1.69	1.74	1.80
	Amps	4.9	5.0	5.1	5.3	5.3	5.4	5.5	5.7	5.7	5.8	6.0	6.2	6.1	6.2	6.4	6.7	6.5	6.6	6.8	7.1	6.8	7.0	7.2	7.5
	HI PR	222	239	253	264	250	269	284	296	284	305	322	336	323	348	367	383	364	391	413	431	402	432	457	476
	LO PR	106	112	123	131	112	119	130	138	116	123	135	144	122	130	142	151	128	136	148	158	132	141	153	163
	MBh	17.9	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.7	17.2	18.6	20.0	15.9	16.3	17.7	19.0	14.7	15.1	16.4	17.6
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.88	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.85	0.65	0.42
	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10
	kW	1.31	1.34	1.38	1.42	1.40	1.43	1.47	1.52	1.48	1.51	1.56	1.61	1.56	1.59	1.64	1.69	1.62	1.65	1.70	1.75	1.67	1.70	1.76	1.81
	Amps	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.7	6.9	7.1	6.9	7.1	7.3	7.6
	HI PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481
	LO PR	107	114	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	525	MBh	16.4	16.7	17.9	19.1	16.0	16.3	17.4	18.6	15.6	15.9	17.0	18.2	15.2	15.6	16.6	17.8	14.5	14.8	15.8	16.9	13.4	13.7	14.6	15.6	13.4	13.7	14.6	15.6							
		S/T	0.84	0.79	0.64	0.5	0.87	0.82	0.66	0.50	0.89	0.84	0.68	0.5	0.92	0.86	0.70	0.53	0.96	0.90	0.73	0.5	0.96	0.90	0.74	0.55	0.96	0.90	0.74	0.55							
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	15						
		kW	1.28	1.31	1.34	1.4	1.37	1.40	1.44	1.48	1.45	1.48	1.52	1.6	1.52	1.55	1.60	1.65	1.58	1.61	1.66	1.7	1.63	1.66	1.72	1.77	1.63	1.66	1.72	1.77							
		Amps	4.8	4.9	5.0	5.2	5.2	5.3	5.4	5.6	5.6	5.7	5.9	6.1	6.0	6.1	6.3	6.5	6.3	6.5	6.7	7.0	6.7	6.9	7.1	7.4	6.7	6.9	7.1	7.4							
	600	HI PR	218	234	248	258.2	244	263	278	290	278	299	316	329.6	317	341	360	375	356	383	405	422.3	394	424	447	467	394	424	447	467							
		LO PR	104	110	120	128.1	109	116	127	135	114	121	132	140.6	119	127	139	148	125	133	145	154.8	129	138	150	160	129	138	150	160							
		MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9							
		S/T	0.87	0.82	0.66	0.5	0.90	0.85	0.69	0.51	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.54	0.99	0.93	0.76	0.6	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57							
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15	22	21	19	15							
675	kW	1.31	1.34	1.38	1.4	1.40	1.43	1.47	1.52	1.48	1.51	1.56	1.6	1.56	1.59	1.64	1.69	1.62	1.65	1.70	1.8	1.67	1.70	1.76	1.81	1.67	1.70	1.76	1.81								
	Amps	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.7	6.9	7.2	6.9	7.1	7.3	7.6	6.9	7.1	7.3	7.6								
	HI PR	225	242	255	266.2	252	271	286	299	287	308	326	339.7	326	351	371	387	367	395	417	435.3	406	437	461	481	406	437	461	481								
	LO PR	107	114	124	132.0	113	120	131	140	117	125	136	145.0	123	131	143	152	129	137	150	159.6	133	142	155	165	133	142	155	165								
	MBh	18.3	18.7	19.9	21.3	17.8	18.2	19.5	20.8	17.4	17.8	19.0	20.3	17.0	17.4	18.5	19.8	16.1	16.5	17.6	18.8	14.9	15.3	16.3	17.4	14.9	15.3	16.3	17.4								
	S/T	0.91	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.76	0.57	1.00	1.00	0.79	0.6	1.00	1.00	0.80	0.60	1.00	1.00	0.80	0.60								
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	20	21	18	14	20	21	18	14								
	kW	1.32	1.35	1.39	1.4	1.41	1.44	1.48	1.53	1.50	1.53	1.57	1.6	1.57	1.60	1.65	1.70	1.63	1.66	1.71	1.8	1.68	1.72	1.77	1.83	1.68	1.72	1.77	1.83								
	Amps	5.0	5.1	5.2	5.4	5.3	5.5	5.6	5.9	5.8	5.9	6.1	6.4	6.2	6.3	6.5	6.8	6.6	6.7	7.0	7.2	7.0	7.1	7.4	7.6	7.0	7.1	7.4	7.6								
	HI PR	227	244	258	268.9	255	274	289	302	290	312	329	343.1	330	355	375	391	371	399	422	439.7	410	441	466	486	410	441	466	486								
LO PR	108	115	125	133.4	114	121	132	141	118	126	137	146.4	124	132	144	154	130	139	151	161.2	135	143	157	167	135	143	157	167									

85	525	MBh	16.6	17.0	17.8	19.0	16.3	16.6	17.4	18.5	15.9	16.2	16.9	18.1	15.5	15.8	16.5	17.6	14.7	15.0	15.7	16.8	13.6	13.9	14.5	15.5
		S/T	0.88	0.85	0.77	0.62	0.91	0.88	0.79	0.64	0.94	0.90	0.81	0.66	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.97	0.88	0.71
		ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	26	25	24	21	24	24	22	19
		kW	1.29	1.32	1.35	1.39	1.38	1.41	1.45	1.49	1.46	1.49	1.54	1.58	1.53	1.56	1.61	1.66	1.59	1.62	1.67	1.73	1.64	1.68	1.73	1.78
		Amps	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.6	5.8	6.0	6.2	6.0	6.2	6.4	6.6	6.4	6.6	6.8	7.0	6.8	6.9	7.2	7.4
	HI PR	220	237	250	261	247	266	281	293	281	302	319	333	320	344	363	379	360	387	409	426	398	428	452	471	
	LO PR	105	111	121	129	110	118	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	
	600	MBh	18.0	18.4	19.3	20.5	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	15.9	16.2	17.0	18.2	14.8	15.0	15.8	16.8
		S/T	0.91	0.88	0.79	0.64	0.95	0.91	0.82	0.67	0.97	0.94	0.84	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
		ΔT	25	25	23	20	26	25	24	21	26	25	24	21	26	25	24	21	24	25	24	20	23	23	22	19
kW		1.32	1.35	1.39	1.43	1.41	1.44	1.48	1.53	1.50	1.53	1.57	1.62	1.57	1.60	1.65	1.70	1.63	1.66	1.71	1.77	1.68	1.72	1.77	1.83	
Amps		5.0	5.1	5.2	5.4	5.3	5.5	5.6	5.9	5.8	5.9	6.1	6.4	6.2	6.3	6.5	6.8	6.6	6.7	7.0	7.2	7.0	7.1	7.4	7.6	
HI PR	227	244	258	269	255	274	289	302	290	312	329	343	330	355	375	391	371	399	422	440	410	441	466	486		
LO PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	139	151	161	135	143	157	167		
675	MBh	18.6	18.9	19.8	21.2	18.1	18.5	19.4	20.7	17.7	18.1	18.9	20.2	17.3	17.6	18.4	19.7	16.4	16.7	17.5	18.7	15.2	15.5	16.2	17.3	
	S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
	ΔT	24	24	23	19	25	24	23	20	24	24	23	20	24	24	23	20	22	23	23	20	21	21	21	18	
	kW	1.33	1.36	1.40	1.44	1.42	1.45	1.50	1.54	1.51	1.54	1.58	1.63	1.58	1.61	1.66	1.71	1.64	1.68	1.73	1.78	1.70	1.73	1.79	1.84	
	Amps	5.0	5.1	5.3	5.5	5.4	5.5	5.7	5.9	5.8	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.6	6.8	7.0	7.3	7.0	7.2	7.4	7.7	
HI PR	229	247	260	272	257	277	292	305	292	315	332	347	333	358	378	395	375	403	426	444	414	445	470	491		
LO PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168		

kW = Total system power	
Amps = outdoor unit amps (comp.+fan)	
Shaded area reflects AHRI conditions	
IDB: Entering Indoor Dry Bulb Temperature	
High and low pressures are measured at the liquid and suction service valves.	

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		ENTERING INDOOR WET BULB TEMPERATURE																							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-
	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	1.60	1.64	1.68	-	1.72	1.75	1.81	-	1.82	1.86	1.91	-	1.91	1.95	2.01	-	1.98	2.03	2.09	-	2.05	2.09	2.16	-
	Amps	5.9	6.0	6.2	-	6.4	6.5	6.7	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-
	HI PR	222	239	253	-	249	268	283	-	284	305	322	-	323	348	367	-	364	391	413	-	402	432	456	-
800	LO PR	100	106	116	-	106	112	123	-	110	117	128	-	115	123	134	-	121	129	140	-	125	133	145	-
	MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-
	S/T	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	1.64	1.67	1.72	-	1.76	1.79	1.85	-	1.86	1.90	1.96	-	1.95	2.00	2.06	-	2.03	2.08	2.14	-	2.10	2.14	2.21	-
	Amps	6.1	6.2	6.4	-	6.6	6.7	6.9	-	7.1	7.3	7.5	-	7.6	7.8	8.1	-	8.1	8.3	8.6	-	8.6	8.8	9.1	-
900	HI PR	229	247	260	-	257	277	292	-	293	315	332	-	333	359	379	-	375	403	426	-	414	446	471	-
	LO PR	103	110	120	-	109	116	127	-	113	120	132	-	119	127	138	-	125	133	145	-	129	137	150	-
	MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-
	kW	1.65	1.69	1.74	-	1.77	1.81	1.86	-	1.88	1.92	1.97	-	1.97	2.01	2.07	-	2.05	2.09	2.16	-	2.12	2.16	2.23	-
75	Amps	6.1	6.3	6.5	-	6.6	6.8	7.0	-	7.2	7.4	7.6	-	7.7	7.9	8.2	-	8.2	8.4	8.7	-	8.7	8.9	9.2	-
	HI PR	231	249	263	-	260	280	295	-	295	318	336	-	336	362	382	-	379	407	430	-	418	450	475	-
	LO PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-
	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.0	19.6	20.2	21.8	23.4	19.1	19.7	21.3	22.9	18.2	18.7	20.2	21.7	16.8	17.3	18.7	20.1
	S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.89	0.80	0.60	0.39
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
800	kW	1.62	1.65	1.70	1.75	1.73	1.77	1.82	1.88	1.83	1.87	1.93	1.99	1.92	1.96	2.02	2.09	2.00	2.04	2.11	2.17	2.07	2.11	2.18	2.25
	Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9	9.3
	HI PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481
	LO PR	101	108	117	125	107	114	124	132	111	118	129	137	117	124	135	144	122	130	142	151	126	134	147	156
	MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
900	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
	kW	1.65	1.69	1.74	1.79	1.77	1.81	1.86	1.92	1.88	1.92	1.98	2.04	1.97	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.12	2.16	2.23	2.30
	Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6
	HI PR	232	249	263	274	260	280	295	308	295	318	336	350	337	362	382	399	379	407	430	449	418	450	475	496
	LO PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161
	MBh	22.9	23.6	25.5	27.4	22.4	23.0	24.9	26.8	21.9	22.5	24.4	26.1	21.3	22.0	23.8	25.5	20.3	20.9	22.6	24.2	18.8	19.3	20.9	22.4
70	S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	11	20	18	15	10	19	17	14	10
	kW	1.67	1.70	1.75	1.80	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.05	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.25	2.13	2.18	2.25	2.32
	Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7
	HI PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	412	435	453	423	455	480	501
	LO PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	700	MBh	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0
		S/T	0.85	0.80	0.65	0.5	0.88	0.83	0.68	0.50	0.91	0.85	0.69	0.5	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.6	0.98	0.92	0.75	0.56
		ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15
		kW	1.63	1.66	1.71	1.8	1.74	1.78	1.83	1.89	1.85	1.89	1.94	2.0	1.94	1.98	2.04	2.11	2.02	2.06	2.12	2.2	2.08	2.13	2.19	2.27
		Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4
	800	HI PR	227	244	258	268.9	255	274	289	302	290	312	329	343.1	330	355	375	391	371	399	422	439.7	410	441	466	486
		LO PR	102	109	119	126.3	108	115	125	133	112	119	130	138.7	118	125	137	146	123	131	143	152.7	128	136	148	158
		MBh	22.6	23.1	24.7	26.4	22.1	22.6	24.2	25.8	21.6	22.1	23.6	25.2	21.1	21.5	23.0	24.6	20.0	20.5	21.9	23.4	18.5	18.9	20.2	21.6
		S/T	0.88	0.83	0.68	0.5	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.00	0.95	0.78	0.58
		ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	23	22	19	15	21	21	18	14
900	kW	1.67	1.70	1.75	1.8	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.1	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.2	2.13	2.18	2.25	2.32	
	Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	
	HI PR	234	252	266	277.2	262	282	298	311	298	321	339	353.8	340	366	386	403	382	412	435	453.3	423	455	480	501	
	LO PR	105	112	122	130.2	111	118	129	138	116	123	134	143.0	121	129	141	150	127	135	148	157.4	132	140	153	163	
	MBh	23.3	23.8	25.5	27.2	22.8	23.3	24.9	26.6	22.2	22.7	24.3	26.0	21.7	22.2	23.7	25.3	20.6	21.1	22.5	24.1	19.1	19.5	20.8	22.3	
900	S/T	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.6	1.00	1.00	0.81	0.61	
	ΔT	22	21	18	15	22	21	19	15	23	21	19	15	22	22	19	15	21	22	19	15	20	20	17	14	
	kW	1.68	1.71	1.76	1.8	1.80	1.84	1.89	1.95	1.91	1.95	2.01	2.1	2.00	2.04	2.11	2.17	2.08	2.13	2.19	2.3	2.15	2.20	2.27	2.34	
	Amps	6.2	6.4	6.6	6.8	6.7	6.9	7.1	7.4	7.3	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.6	8.8	9.2	8.9	9.1	9.4	9.7	
	HI PR	236	254	268	280.0	265	285	301	314	301	324	343	357.3	343	369	390	407	386	416	439	459	427	459	485	506	
LO PR	106	113	123	131.5	112	119	130	139	117	124	136	144.4	123	130	142	152	129	137	149	158.9	133	141	154	164		

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	875	MBh	24.9	25.8	28.3	-	24.4	25.2	27.7	-	23.8	24.6	27.0	-	23.2	24.0	26.3	-	22.0	22.8	25.0	-	20.4	21.2	23.2	-											
		S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-											
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-											
		kW	1.97	2.01	2.07	-	2.12	2.16	2.23	-	2.24	2.29	2.36	-	2.35	2.40	2.48	-	2.45	2.50	2.58	-	2.53	2.58	2.67	-											
		Amps	7.2	7.4	7.7	-	7.8	8.0	8.3	-	8.5	8.7	9.0	-	9.1	9.4	9.7	-	9.7	10.0	10.3	-	10.3	10.6	10.9	-											
		HI PR	245	264	279	-	275	296	313	-	313	337	356	-	356	384	405	-	401	432	456	-	443	477	503	-											
		LO PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-											
70	1050	MBh	27.0	28.0	30.7	-	26.4	27.4	30.0	-	25.8	26.7	29.3	-	25.1	26.1	28.5	-	23.9	24.7	27.1	-	22.1	22.9	25.1	-											
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-											
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-											
		kW	2.02	2.06	2.12	-	2.17	2.21	2.28	-	2.30	2.35	2.42	-	2.41	2.46	2.54	-	2.51	2.56	2.64	-	2.59	2.65	2.73	-											
		Amps	7.4	7.6	7.9	-	8.1	8.3	8.5	-	8.8	9.0	9.3	-	9.4	9.6	10.0	-	10.0	10.3	10.6	-	10.6	10.9	11.3	-											
		HI PR	253	272	287	-	284	305	322	-	323	347	367	-	367	395	418	-	413	445	470	-	457	492	519	-											
		LO PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-											
1125		MBh	27.3	28.3	31.0	-	26.7	27.6	30.3	-	26.0	27.0	29.5	-	25.4	26.3	28.8	-	24.1	25.0	27.4	-	22.3	23.2	25.4	-											
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-											
		ΔT	16	14	11	-	16	14	11	-	16	14	11	-	17	14	11	-	16	14	11	-	15	13	10	-											
		kW	2.02	2.07	2.13	-	2.17	2.22	2.28	-	2.30	2.35	2.42	-	2.42	2.47	2.55	-	2.52	2.57	2.65	-	2.60	2.66	2.74	-											
		Amps	7.5	7.7	7.9	-	8.1	8.3	8.6	-	8.8	9.0	9.3	-	9.4	9.7	10.0	-	10.0	10.3	10.6	-	10.6	10.9	11.3	-											
		HI PR	254	273	288	-	285	306	323	-	324	348	368	-	369	397	419	-	415	446	471	-	458	493	521	-											
		LO PR	108	115	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	139	151	-	135	143	157	-											
75	875	MBh	25.4	26.1	28.3	30.3	24.8	25.5	27.6	29.6	24.2	24.9	26.9	28.9	23.6	24.3	26.3	28.2	22.4	23.1	25.0	26.8	20.8	21.4	23.1	24.8											
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39											
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	18	11	21	19	16	11	20	18	15	10											
		kW	1.99	2.03	2.09	2.15	2.13	2.18	2.24	2.31	2.26	2.31	2.38	2.45	2.37	2.42	2.50	2.58	2.47	2.52	2.60	2.69	2.55	2.61	2.69	2.78											
		Amps	7.3	7.5	7.7	8.0	7.9	8.1	8.4	8.7	8.6	8.8	9.1	9.5	9.2	9.4	9.8	10.1	9.8	10.1	10.4	10.8	10.4	10.7	11.0	11.5											
		HI PR	248	267	282	294	278	299	316	329	316	340	359	375	360	387	409	427	405	436	460	480	448	482	509	530											
		LO PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163											
75	1050	MBh	27.5	28.3	30.6	32.9	26.8	27.6	29.9	32.1	26.2	27.0	29.2	31.3	25.6	26.3	28.5	30.6	24.3	25.0	27.1	29.0	22.5	23.2	25.1	26.9											
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.41											
		ΔT	19	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10											
		kW	2.04	2.08	2.14	2.20	2.18	2.23	2.30	2.37	2.32	2.36	2.44	2.51	2.43	2.48	2.56	2.64	2.53	2.58	2.67	2.75	2.61	2.67	2.76	2.85											
		Amps	7.5	7.7	8.0	8.3	8.1	8.3	8.6	9.0	8.9	9.1	9.4	9.7	9.5	9.7	10.1	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8											
		HI PR	255	275	290	303	287	308	326	340	326	351	370	386	371	399	422	440	418	449	475	495	461	497	524	547											
		LO PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168											
1125		MBh	27.8	28.6	30.9	33.2	27.1	27.9	30.2	32.4	26.5	27.2	29.5	31.6	25.8	26.6	28.8	30.9	24.5	25.3	27.3	29.3	22.7	23.4	25.3	27.2											
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41											
		ΔT	19	17	14	10	19	17	14	10	19	17	14	10	19	18	14	10	19	17	14	10	18	16	13	9											
		kW	2.04	2.08	2.14	2.21	2.19	2.23	2.30	2.37	2.32	2.37	2.44	2.52	2.44	2.49	2.57	2.65	2.54	2.59	2.67	2.76	2.62	2.68	2.76	2.85											
		Amps	7.5	7.7	8.0	8.3	8.2	8.4	8.6	9.0	8.9	9.1	9.4	9.8	9.5	9.7	10.1	10.5	10.1	10.4	10.7	11.2	10.7	11.0	11.4	11.8											
		HI PR	256	276	291	304	287	309	327	341	327	352	371	387	372	401	423	441	419	451	476	496	463	498	526	549											
		LO PR	109	116	126	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	168											

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	875	MBh	25.8	26.4	28.2	30.1	25.2	25.8	27.5	29.4	24.6	25.1	26.9	28.7	24.0	24.5	26.2	28.0	22.8	23.3	24.9	26.6	21.1	21.6	23.1	24.7
		S/T	0.86	0.80	0.65	0.5	0.89	0.83	0.68	0.51	0.91	0.85	0.70	0.5	0.94	0.88	0.72	0.54	0.98	0.91	0.74	0.6	0.98	0.92	0.75	0.56
		ΔT	23	22	19	15	24	23	20	16	24	23	20	16	24	23	20	16	23	22	19	16	22	21	18	15
		kW	2.00	2.04	2.11	2.2	2.15	2.19	2.26	2.33	2.28	2.33	2.40	2.5	2.39	2.44	2.52	2.60	2.49	2.54	2.62	2.7	2.57	2.63	2.71	2.80
		Amps	7.4	7.6	7.8	8.1	8.0	8.2	8.5	8.8	8.7	8.9	9.2	9.6	9.3	9.5	9.9	10.2	9.9	10.2	10.5	10.9	10.5	10.8	11.1	11.6
		HI PR	250	269	284	296.6	281	302	319	333	319	344	363	378.5	364	391	413	431	409	440	465	485.0	452	487	514	536
		LO PR	106	113	124	131.6	112	120	131	139	117	124	136	144.5	123	131	142	152	129	137	149	159.0	133	141	154	165
80	1050	MBh	28.0	28.6	30.5	32.6	27.3	27.9	29.8	31.9	26.7	27.2	29.1	31.1	26.0	26.6	28.4	30.4	24.7	25.3	27.0	28.8	22.9	23.4	25.0	26.7
		S/T	0.89	0.83	0.68	0.5	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.5	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.6	1.00	0.96	0.78	0.58
		ΔT	22	21	18	14	22	21	18	15	22	21	18	15	22	21	19	15	22	21	18	15	20	20	17	14
		kW	2.05	2.09	2.16	2.2	2.20	2.25	2.32	2.39	2.33	2.38	2.46	2.5	2.45	2.50	2.58	2.67	2.55	2.60	2.69	2.8	2.64	2.69	2.78	2.87
		Amps	7.6	7.8	8.0	8.3	8.2	8.4	8.7	9.0	8.9	9.2	9.5	9.8	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.5	11.9
		HI PR	258	278	293	305.8	289	312	329	343	329	354	374	390.2	375	404	426	444	422	454	479	500.0	466	502	530	552
		LO PR	110	117	127	135.6	116	123	135	143	120	128	140	148.9	126	135	147	156	133	141	154	164.0	137	146	159	170
1125		MBh	28.2	28.9	30.8	33.0	27.6	28.2	30.1	32.2	26.9	27.5	29.4	31.4	26.3	26.8	28.7	30.7	25.0	25.5	27.2	29.1	23.1	23.6	25.2	27.0
		S/T	0.91	0.85	0.69	0.5	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.5	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.6	1.00	0.98	0.79	0.59
		ΔT	21	20	17	14	21	20	18	14	21	20	18	14	21	20	18	14	20	20	18	14	19	19	16	13
		kW	2.06	2.10	2.16	2.2	2.21	2.25	2.32	2.39	2.34	2.39	2.46	2.5	2.46	2.51	2.59	2.67	2.56	2.61	2.69	2.8	2.64	2.70	2.79	2.88
		Amps	7.6	7.8	8.1	8.4	8.2	8.4	8.7	9.1	9.0	9.2	9.5	9.9	9.6	9.8	10.2	10.6	10.2	10.5	10.8	11.3	10.9	11.1	11.5	12.0
		HI PR	259	278	294	306.7	290	312	330	344	330	355	375	391.4	376	405	427	446	423	455	481	501.5	467	503	531	554
		LO PR	110	117	128	136.0	116	124	135	144	121	128	140	149.4	127	135	147	157	133	141	154	164.4	138	146	160	170

85	MBh	26.3	26.8	28.0	29.9	25.7	26.1	27.4	29.2	25.0	25.5	26.7	28.5	24.4	24.9	26.1	27.8	23.2	23.7	24.8	26.4	21.5	21.9	23.0	24.5
	S/T	0.90	0.87	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	0.99	0.90	0.73
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	24	20	24	25	23	20	23	23	22	19
	kW	2.02	2.06	2.12	2.19	2.17	2.21	2.28	2.35	2.30	2.34	2.42	2.49	2.41	2.46	2.54	2.62	2.51	2.56	2.64	2.73	2.59	2.65	2.73	2.82
	Amps	7.4	7.6	7.9	8.2	8.1	8.3	8.5	8.9	8.8	9.0	9.3	9.7	9.4	9.6	10.0	10.3	10.0	10.3	10.6	11.0	10.6	10.9	11.3	11.7
	HI PR	253	272	287	300	284	305	322	336	323	347	367	382	367	395	417	435	413	445	470	490	457	491	519	541
	LO PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
	MBh	28.5	29.0	30.4	32.4	27.8	28.3	29.7	31.7	27.1	27.7	29.0	30.9	26.5	27.0	28.3	30.1	25.1	25.6	26.8	28.6	23.3	23.7	24.9	26.5
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
	ΔT	23	23	22	19	23	23	22	19	24	23	22	19	23	23	22	19	22	22	22	19	20	21	20	18
1125	kW	2.07	2.11	2.17	2.24	2.22	2.26	2.33	2.41	2.35	2.40	2.48	2.56	2.47	2.52	2.60	2.69	2.57	2.63	2.71	2.80	2.66	2.71	2.80	2.89
	Amps	7.7	7.8	8.1	8.4	8.3	8.5	8.8	9.1	9.0	9.3	9.6	9.9	9.7	9.9	10.2	10.6	10.3	10.6	10.9	11.3	10.9	11.2	11.6	12.0
	HI PR	261	280	296	309	292	315	332	347	333	358	378	394	379	408	430	449	426	458	484	505	471	507	535	558
	LO PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	166	138	147	161	171
	MBh	28.7	29.3	30.7	32.7	28.1	28.6	30.0	32.0	27.4	27.9	29.3	31.2	26.7	27.3	28.5	30.4	25.4	25.9	27.1	28.9	23.5	24.0	25.1	26.8
	S/T	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	22	22	21	18	23	22	21	18	22	22	21	18	22	22	21	18	21	21	21	18	19	20	19	17
	kW	2.07	2.11	2.18	2.24	2.22	2.27	2.34	2.41	2.36	2.41	2.48	2.56	2.48	2.53	2.61	2.69	2.58	2.63	2.72	2.80	2.66	2.72	2.81	2.90
	Amps	7.7	7.9	8.1	8.4	8.3	8.5	8.8	9.1	9.1	9.3	9.6	10.0	9.7	9.9	10.3	10.7	10.3	10.6	10.9	11.4	11.0	11.2	11.6	12.1
	HI PR	261	281	297	310	293	316	333	348	334	359	379	395	380	409	432	450	427	460	486	506	472	508	537	560
	LO PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1050	MBh	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.2	31.9	-	27.4	28.4	31.2	-	26.1	27.0	29.6	-	24.2	25.0	27.4	-
		S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-
		ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-
		kW	2.32	2.37	2.44	-	2.49	2.55	2.63	-	2.65	2.70	2.79	-	2.78	2.84	2.93	-	2.89	2.96	3.05	-	2.99	3.06	3.16	-
		Amps	8.5	8.7	9.0	-	9.2	9.5	9.8	-	10.1	10.3	10.7	-	10.8	11.1	11.4	-	11.5	11.8	12.2	-	12.2	12.5	13.0	-
		Hi PR	235	252	267	-	263	283	299	-	299	322	340	-	341	367	387	-	384	413	436	-	424	456	482	-
		Lo PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	146	-
70	1200	MBh	32.0	33.1	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	28.2	29.3	32.1	-	26.2	27.1	29.7	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.81	0.68	0.47	-
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
		kW	2.38	2.43	2.50	-	2.56	2.61	2.69	-	2.71	2.77	2.86	-	2.85	2.91	3.00	-	2.97	3.03	3.13	-	3.07	3.14	3.24	-
		Amps	8.8	9.0	9.3	-	9.5	9.7	10.1	-	10.4	10.6	11.0	-	11.1	11.4	11.8	-	11.8	12.1	12.6	-	12.6	12.9	13.3	-
		Hi PR	242	260	275	-	271	292	308	-	309	332	351	-	352	378	399	-	395	426	449	-	437	470	497	-
		Lo PR	104	111	121	-	110	117	128	-	114	121	133	-	120	128	139	-	126	134	146	-	130	138	151	-
70	1350	MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.7	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	27.0	27.9	30.6	-
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
		ΔT	17	14	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	14	11	-	16	13	10	-
		kW	2.40	2.45	2.52	-	2.58	2.63	2.71	-	2.73	2.79	2.88	-	2.87	2.93	3.03	-	2.99	3.06	3.16	-	3.09	3.16	3.26	-
		Amps	8.8	9.1	9.4	-	9.6	9.8	10.2	-	10.5	10.7	11.1	-	11.2	11.5	11.9	-	12.0	12.3	12.7	-	12.7	13.0	13.5	-
		Hi PR	244	263	278	-	274	295	311	-	312	335	354	-	355	382	403	-	399	430	454	-	441	475	501	-
		Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-
75	1050	MBh	30.0	30.9	33.4	35.9	29.3	30.2	32.7	35.1	28.6	29.5	31.9	34.2	27.9	28.7	31.1	33.4	26.5	27.3	29.6	31.7	24.6	25.3	27.4	29.4
		S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.73	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39
		ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10
		kW	2.34	2.39	2.46	2.54	2.51	2.57	2.65	2.73	2.67	2.72	2.81	2.90	2.80	2.86	2.96	3.05	2.92	2.98	3.08	3.18	3.02	3.08	3.18	3.29
		Amps	8.6	8.8	9.1	9.5	9.3	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.2	11.6	12.0	11.6	11.9	12.3	12.8	12.3	12.6	13.1	13.6
		Hi PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	388	417	440	459	428	461	487	507
		Lo PR	102	108	118	126	108	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	158
75	1200	MBh	32.5	33.5	36.2	38.9	31.8	32.7	35.4	38.0	31.0	31.9	34.5	37.1	30.2	31.1	33.7	36.2	28.7	29.6	32.0	34.4	26.6	27.4	29.7	31.8
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40
		ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10
		kW	2.40	2.45	2.52	2.60	2.58	2.63	2.71	2.80	2.73	2.79	2.88	2.97	2.87	2.94	3.03	3.13	2.99	3.06	3.16	3.26	3.09	3.16	3.27	3.37
		Amps	8.8	9.1	9.4	9.7	9.6	9.8	10.2	10.6	10.5	10.7	11.1	11.5	11.2	11.5	11.9	12.4	12.0	12.3	12.7	13.2	12.7	13.0	13.5	14.0
		Hi PR	244	263	278	290	274	295	312	325	312	336	354	370	355	382	404	421	399	430	454	473	441	475	502	523
		Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162
75	1350	MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.3	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8
		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42
		ΔT	19	18	14	10	19	18	15	10	19	18	15	10	20	18	15	10	19	18	15	10	18	17	14	9
		kW	2.41	2.46	2.54	2.62	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.00	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.29	3.12	3.19	3.29	3.40
		Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1
		Hi PR	247	266	280	292	277	298	315	328	315	339	358	373	359	386	408	425	403	434	459	478	446	480	507	528
		Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)
kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																		115°F													
		65°F						75°F						85°F						95°F						105°F							
		ENTERING INDOOR WET BULB TEMPERATURE																															
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	30.5	31.2	33.3	35.6	29.8	30.5	32.6	34.8	29.1	29.8	31.8	34.0	28.4	29.0	31.0	33.2	27.0	27.6	29.5	31.5	25.0	25.5	27.3	29.2	25.0	25.5	27.3	29.2	25.0	25.5	27.3	29.2
	S/T	0.85	0.79	0.65	0.5	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.5	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.6	0.97	0.91	0.74	0.56	0.97	0.91	0.74	0.56	0.97	0.91	0.74	0.56
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	18	14	21	20	18	14	21	20	18	14
	kW	2.36	2.41	2.48	2.6	2.53	2.59	2.67	2.75	2.69	2.75	2.83	2.9	2.83	2.89	2.98	3.08	2.94	3.01	3.10	3.2	3.04	3.11	3.21	3.32	3.04	3.11	3.21	3.32	3.04	3.11	3.21	3.32
	Amps	8.7	8.9	9.2	9.6	9.4	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.3	11.7	12.1	11.7	12.0	12.4	12.9	12.5	12.8	13.2	13.7	12.5	12.8	13.2	13.7	12.5	12.8	13.2	13.7
	HI PR	239	258	272	283.7	269	289	305	318	305	329	347	362.1	348	374	395	412	391	421	445	463.9	432	465	491	513	432	465	491	513	432	465	491	513
	LO PR	103	109	120	127.3	109	116	126	134	113	120	131	139.8	119	126	138	147	124	132	144	153.8	129	137	149	159	129	137	149	159	129	137	149	159
	MBh	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	30.8	31.4	33.6	35.9	29.2	29.9	31.9	34.1	27.1	27.7	29.6	31.6	27.1	27.7	29.6	31.6	27.1	27.7	29.6	31.6
	S/T	0.88	0.82	0.67	0.5	0.91	0.85	0.70	0.52	0.93	0.88	0.71	0.5	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.6	1.00	0.95	0.77	0.58	1.00	0.94	0.76	0.6	1.00	0.95	0.77	0.58
	ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	21	19	15	21	20	17	14	21	20	17	14	21	20	17	14
	kW	2.42	2.46	2.54	2.6	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.0	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.3	3.12	3.19	3.29	3.40	3.12	3.19	3.29	3.40	3.12	3.19	3.29	3.40
	Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1	12.8	13.2	13.6	14.1	12.8	13.2	13.6	14.1
	HI PR	247	266	280	292.5	277	298	315	328	315	339	358	373.3	359	386	408	425	404	434	459	478.3	446	480	507	528	446	480	507	528	446	480	507	528
	LO PR	106	113	123	131.2	112	119	130	139	116	124	135	144.1	122	130	142	151	128	136	149	158.6	133	141	154	164	133	141	154	164	133	141	154	164
85	MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.5	32.6	27.9	28.5	30.5	32.6	27.9	28.5	30.5	32.6
	S/T	0.92	0.86	0.70	0.5	0.96	0.90	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60
	ΔT	21	20	18	14	22	21	18	14	22	21	18	14	22	21	18	15	21	21	18	14	19	19	17	13	21	21	18	14	19	19	17	13
	kW	2.43	2.48	2.56	2.6	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.0	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.3	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43
	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.6	13.1	12.6	12.9	13.3	13.9	12.6	12.9	13.3	13.9	12.6	12.9	13.3	13.9
	HI PR	242	260	275	287	271	292	308	322	309	332	351	366	351	378	399	416	395	425	449	469	437	470	496	518	437	470	496	518	437	470	496	518
	LO PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161	130	138	151	161	130	138	151	161
	MBh	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.6	31.3	31.9	33.4	35.7	29.7	30.3	31.8	33.9	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	23	22	19	21	22	21	18	23	23	22	19	21	22	21	18
	kW	2.43	2.48	2.56	2.64	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.02	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.32	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43
	Amps	9.0	9.2	9.6	9.9	9.8	10.0	10.4	10.8	10.7	10.9	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.3	13.7	14.3	12.9	13.3	13.7	14.3	12.9	13.3	13.7	14.3
	HI PR	249	268	283	295	280	301	318	331	318	342	361	377	362	390	412	429	408	439	463	483	450	485	512	534	450	485	512	534	450	485	512	534
	LO PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	134	143	156	166	134	143	156	166
85	MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.7	32.3	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	28.4	28.9	30.3	32.3	28.4	28.9	30.3	32.3
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78
	ΔT	23	22	21	18	23	23	21	19	23	23	21	19	22	22	22	19	21	21	18	15	21	20	17	14	21	21	18	15	21	20	17	14
	kW	2.45	2.50	2.58	2.66	2.64	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.94	3.01	3.10	3.21	3.07	3.13	3.24	3.34	3.17	3.24	3.35	3.46	3.17	3.24	3.35	3.46	3.17	3.24	3.35	3.46
	Amps	9.1	9.3	9.7	10.0	9.9	10.1	10.5	10.9	10.8	11.0	11.4	11.9	11.5	11.8	12.2	12.7	12.3	12.6	13.1	13.6	13.1	13.4	13.9	14.4	13.1	13.4	13.9	14.4	13.1	13.4	13.9	14.4
	HI PR	252	271	286	298	282	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	489	517	539	455	489	517	539	455	489	517	539
	LO PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167	135	144	157	167
	MBh	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.6	31.3	31.9	33.4	35.7	29.7	30.3	31.8	33.9	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	23	22	19	21	22	21	18	23	23	22	19	21	22	21	18
	kW	2.43	2.48	2.56	2.64	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.02	2.92	2.98	3.08	3																

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1225	MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-
		kW	2.81	2.86	2.94	-	3.00	3.06	3.15	-	3.17	3.24	3.33	-	3.33	3.39	3.50	-	3.45	3.53	3.63	-	3.57	3.64	3.75	-
		Amps	10.3	10.6	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	12.9	13.2	13.7	-	13.7	14.1	14.5	-	14.5	14.9	15.4	-
	HI PR	220	237	250	-	247	266	281	-	281	302	319	-	320	344	363	-	360	387	409	-	398	428	452	-	
	LO PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	
	1400	MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-
		S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.49	-	0.86	0.72	0.50	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
		kW	2.87	2.92	3.01	-	3.07	3.13	3.22	-	3.25	3.31	3.41	-	3.40	3.47	3.58	-	3.54	3.61	3.72	-	3.65	3.73	3.84	-
Amps		10.6	10.9	11.2	-	11.5	11.7	12.1	-	12.4	12.7	13.1	-	13.3	13.6	14.0	-	14.1	14.5	14.9	-	15.0	15.3	15.8	-	
1575	HI PR	227	244	258	-	255	274	289	-	289	312	329	-	330	355	375	-	371	399	421	-	410	441	466	-	
	LO PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	139	-	126	134	146	-	130	138	151	-	
	MBh	39.2	40.6	44.5	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	36.5	37.8	41.4	-	34.6	35.9	39.3	-	32.1	33.3	36.4	-	
	S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.76	0.52	-	
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
	kW	2.89	2.94	3.03	-	3.09	3.15	3.25	-	3.27	3.34	3.44	-	3.43	3.50	3.61	-	3.56	3.64	3.75	-	3.68	3.76	3.87	-	
	Amps	10.7	11.0	11.3	-	11.6	11.8	12.2	-	12.5	12.8	13.3	-	13.4	13.7	14.2	-	14.2	14.6	15.1	-	15.1	15.5	16.0	-	
	HI PR	229	247	260	-	257	277	292	-	292	315	332	-	333	358	378	-	375	403	426	-	414	445	470	-	
	LO PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	
	75	1225	MBh	35.7	36.8	39.8	42.7	34.9	35.9	38.9	41.7	34.1	35.1	38.0	40.7	33.2	34.2	37.0	39.7	31.6	32.5	35.2	37.8	29.2	30.1	32.6
S/T			0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.95	0.85	0.64	0.41
ΔT			22	20	17	11	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
kW			2.83	2.88	2.96	3.05	3.02	3.08	3.17	3.27	3.20	3.26	3.36	3.46	3.35	3.42	3.52	3.63	3.48	3.55	3.66	3.78	3.59	3.67	3.78	3.90
Amps			10.4	10.7	11.0	11.4	11.2	11.5	11.9	12.3	12.2	12.5	12.9	13.4	13.0	13.3	13.8	14.3	13.9	14.2	14.7	15.2	14.7	15.0	15.5	16.1
HI PR		222	239	253	263	249	268	283	296	284	305	322	336	323	348	367	383	363	391	413	431	402	432	456	476	
LO PR		102	108	118	126	108	115	125	133	112	119	130	138	118	125	137	145	123	131	143	152	127	136	148	158	
1400		MBh	38.7	39.8	43.1	46.3	37.8	38.9	42.1	45.2	36.9	38.0	41.1	44.1	36.0	37.1	40.1	43.1	34.2	35.2	38.1	40.9	31.7	32.6	35.3	37.9
		S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
		kW	2.89	2.95	3.03	3.12	3.09	3.15	3.25	3.35	3.27	3.34	3.44	3.54	3.43	3.50	3.61	3.72	3.57	3.64	3.75	3.87	3.68	3.76	3.88	4.00
	Amps	10.7	11.0	11.3	11.7	11.6	11.8	12.2	12.7	12.5	12.8	13.3	13.8	13.4	13.7	14.2	14.7	14.3	14.6	15.1	15.7	15.1	15.5	16.0	16.6	
1575	HI PR	229	247	260	272	257	277	292	305	292	315	332	347	333	358	378	395	375	403	426	444	414	446	470	491	
	LO PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	148	157	131	140	153	163	
	MBh	39.9	41.0	44.4	47.7	38.9	40.1	43.4	46.6	38.0	39.1	42.4	45.5	37.1	38.2	41.3	44.4	35.2	36.3	39.3	42.1	32.6	33.6	36.4	39.0	
	S/T	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.70	0.45	
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	19	18	15	10	
	kW	2.91	2.97	3.05	3.14	3.12	3.18	3.27	3.37	3.30	3.36	3.47	3.57	3.46	3.53	3.64	3.75	3.59	3.67	3.78	3.90	3.71	3.79	3.91	4.03	
	Amps	10.8	11.1	11.4	11.8	11.7	11.9	12.3	12.8	12.7	13.0	13.4	13.9	13.5	13.8	14.3	14.8	14.4	14.7	15.2	15.8	15.2	15.6	16.1	16.7	
	HI PR	231	249	263	274	260	279	295	308	295	318	336	350	336	362	382	399	378	407	430	449	418	450	475	496	
	LO PR	106	113	123	131	112	119	130	139	117	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)
kW = Total system power

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		ENTERING INDOOR WET BULB TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207	211	215	219	223	227	231	235	239	243	247	251	255	259	263	267	271	275	279	283	287	291	295	299	303	307	311	315	319	323	327	331	335	339	343	347	351	355	359	363	367	371	375	379	383	387	391	395	399	403	407	411	415	419	423	427	431	435	439	443	447	451	455	459	463	467	471	475	479	483	487	491	495	499	503	507	511	515	519	523	527	531	535	539	543	547	551	555	559	563	567	571	575	579	583	587	591	595	599	603	607	611	615	619	623	627	631	635	639	643	647	651	655	659	663	667	671	675	679	683	687	691	695	699	703	707	711	715	719	723	727	731	735	739	743	747	751	755	759	763	767	771	775	779	783	787	791	795	799	803	807	811	815	819	823	827	831	835	839	843	847	851	855	859	863	867	871	875	879	883	887	891	895	899	903	907	911	915	919	923	927	931	935	939	943	947	951	955	959	963	967	971	975	979	983	987	991	995	999	1003	1007	1011	1015	1019	1023	1027	1031	1035	1039	1043	1047	1051	1055	1059	1063	1067	1071	1075	1079	1083	1087	1091	1095	1099	1103	1107	1111	1115	1119	1123	1127	1131	1135	1139	1143	1147	1151	1155	1159	1163	1167	1171	1175	1179	1183	1187	1191	1195	1199	1203	1207	1211	1215	1219	1223	1227	1231	1235	1239	1243	1247	1251	1255	1259	1263	1267	1271	1275	1279	1283	1287	1291	1295	1299	1303	1307	1311	1315	1319	1323	1327	1331	1335	1339	1343	1347	1351	1355	1359	1363	1367	1371	1375	1379	1383	1387	1391	1395	1399	1403	1407	1411	1415	1419	1423	1427	1431	1435	1439	1443	1447	1451	1455	1459	1463	1467	1471	1475	1479	1483	1487	1491	1495	1499	1503	1507	1511	1515	1519	1523	1527	1531	1535	1539	1543	1547	1551	1555	1559	1563	1567	1571	1575	1579	1583	1587	1591	1595	1599	1603	1607	1611	1615	1619	1623	1627	1631	1635	1639	1643	1647	1651	1655	1659	1663	1667	1671	1675	1679	1683	1687	1691	1695	1699	1703	1707	1711	1715	1719	1723	1727	1731	1735	1739	1743	1747	1751	1755	1759	1763	1767	1771	1775	1779	1783	1787	1791	1795	1799	1803	1807	1811	1815	1819	1823	1827	1831	1835	1839	1843	1847	1851	1855	1859	1863	1867	1871	1875	1879	1883	1887	1891	1895	1899	1903	1907	1911	1915	1919	1923

85	1225	MBh	37.0	37.7	39.5	42.1	36.1	36.8	38.6	41.2	35.3	36.0	37.7	40.2	34.4	35.1	36.7	39.2	32.7	33.3	34.9	37.2	30.3	30.9	32.3	34.5	
		S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	
		ΔT	26	26	24	21	27	26	25	21	26	26	25	21	26	26	25	22	25	25	25	21	23	23	23	20	
		kW	2.87	2.92	3.01	3.10	3.07	3.13	3.22	3.32	3.25	3.31	3.41	3.52	3.40	3.47	3.58	3.69	3.54	3.61	3.72	3.84	3.65	3.73	3.84	3.97	
		Amps	10.6	10.9	11.2	11.6	11.5	11.7	12.1	12.6	12.4	12.7	13.1	13.6	13.3	13.6	14.0	14.6	14.1	14.1	14.5	14.9	15.5	14.9	15.3	15.8	16.4
		Hi PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	391	399	421	439	410	441	466	486
		LOPR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161	
	1400	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4	
		S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80	
		ΔT	26	25	24	21	26	26	24	21	25	26	24	21	24	25	25	21	23	24	24	21	22	22	23	20	
kW		2.93	2.99	3.08	3.17	3.14	3.20	3.30	3.40	3.32	3.39	3.49	3.60	3.48	3.56	3.66	3.78	3.62	3.70	3.81	3.93	3.74	3.82	3.94	4.06		
Amps		10.9	11.2	11.5	11.9	11.8	12.0	12.4	12.9	12.8	13.1	13.5	14.0	13.6	14.0	14.4	15.0	14.5	14.9	15.4	15.9	15.4	15.7	16.3	16.9		
Hi PR		234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	411	434	453	422	455	480	501		
LOPR		107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166		
1575	MBh	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	39.4	40.1	42.0	44.8	38.4	39.1	41.0	43.7	36.5	37.2	38.9	41.5	33.8	34.4	36.1	38.5		
	S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83		
	ΔT	24	24	23	20	24	24	23	20	23	23	23	20	22	23	24	20	21	22	23	20	20	20	21	19		
	kW	2.95	3.01	3.10	3.19	3.16	3.23	3.32	3.42	3.35	3.42	3.52	3.63	3.51	3.58	3.69	3.81	3.65	3.73	3.84	3.96	3.77	3.85	3.97	4.10		
	Amps	11.0	11.3	11.6	12.0	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	13.8	14.1	14.6	15.1	14.6	15.0	15.5	16.1	15.5	15.9	16.4	17.1		
	Hi PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	485	506		
	LOPR	108	115	126	134	114	122	133	142	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167		

		OUTDOOR AMBIENT TEMPERATURE																																								
		65°F						75°F						85°F						95°F						105°F						115°F										
		ENTERING INDOOR WET BULB TEMPERATURE																																								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
80	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9	34.2	35.0	37.4	39.9	34.2	35.0	37.4	39.9	34.2	35.0	37.4	39.9					
	S/T	0.88	0.83	0.67	0.5	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.01	0.95	0.77	0.58	1.00	0.94	0.77	0.6	1.01	0.95	0.77	0.58	1.00	0.94	0.77	0.58					
	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	16	24	23	20	16	23	22	19	15	24	23	20	16	23	22	19	15	24	23	20	16	23	22	19	15	
	kW	3.26	3.33	3.42	3.5	3.49	3.56	3.67	3.78	3.70	3.77	3.89	4.0	3.88	3.96	4.08	4.21	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53	
	Amps	12.1	12.3	12.7	13.2	13.0	13.3	13.8	14.3	14.2	14.5	15.0	15.5	15.1	15.5	16.0	16.6	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8	
80	HI PR	246	264	279	291.3	276	297	313	327	314	338	356	371.7	357	384	406	423	402	432	457	476.3	444	478	505	526	402	432	457	476.3	444	478	505	526	402	432	457	476.3	444	478	505	526	
	LO PR	106	113	123	130.9	112	119	130	138	116	124	135	143.7	122	130	142	151	128	136	149	158.2	132	141	154	164	128	136	149	158.2	132	141	154	164	128	136	149	158.2	132	141	154	164	
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	
	S/T	0.91	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.6	1.00	0.98	0.80	0.60	1.00	0.98	0.79	0.6	1.00	0.98	0.80	0.60	1.00	0.98	0.79	0.6	1.00	0.98	0.80	0.60	
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	21	21	19	15	24	23	20	16	21	21	19	15	24	23	20	16	21	21	19	15	
80	kW	3.34	3.40	3.50	3.6	3.58	3.65	3.76	3.87	3.79	3.86	3.98	4.1	3.97	4.06	4.18	4.31	4.13	4.22	4.35	4.5	4.27	4.36	4.50	4.64	4.13	4.22	4.35	4.5	4.27	4.36	4.50	4.64	4.13	4.22	4.35	4.5	4.27	4.36	4.50	4.64	
	Amps	12.4	12.7	13.1	13.6	13.4	13.7	14.2	14.7	14.6	14.9	15.4	16.0	15.6	15.9	16.5	17.1	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3	
	HI PR	253	273	288	300.3	284	306	323	337	323	348	367	383.2	368	396	419	436	414	446	471	491.1	458	493	520	543	414	446	471	491.1	458	493	520	543	414	446	471	491.1	458	493	520	543	
	LO PR	109	116	127	134.9	115	123	134	143	120	127	139	148.1	126	134	146	156	132	140	153	163.1	136	145	158	169	132	140	153	163.1	136	145	158	169	132	140	153	163.1	136	145	158	169	
	MBh	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6	
80	S/T	0.96	0.90	0.73	0.5	1.00	0.93	0.76	0.57	1.00	0.95	0.78	0.6	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.6	1.00	1.00	0.84	0.63	1.00	1.00	0.83	0.6	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63	
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	23	20	16	21	22	19	15	20	20	18	14	21	22	19	15	20	20	18	14	21	22	19	15	20	20	18	14	
	kW	3.36	3.43	3.53	3.6	3.60	3.68	3.79	3.90	3.82	3.89	4.01	4.1	4.00	4.09	4.21	4.35	4.16	4.25	4.39	4.5	4.30	4.39	4.53	4.68	4.16	4.25	4.39	4.5	4.30	4.39	4.53	4.68	4.16	4.25	4.39	4.5	4.30	4.39	4.53	4.68	
	Amps	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.7	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5	
	HI PR	256	275	291	303.3	287	309	326	340	327	351	371	387.1	372	400	423	441	418	450	476	496.0	462	498	525	548	418	450	476	496.0	462	498	525	548	418	450	476	496.0	462	498	525	548	
	LO PR	110	117	128	136.3	116	124	135	144	121	129	140	149.6	127	135	148	157	133	142	155	164.7	138	147	160	170	133	142	155	164.7	138	147	160	170	133	142	155	164.7	138	147	160	170	
85	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	
	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75	
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21	23	23	20	17	25	25	24	21	23	24	21	23	23	20	20	20	17	25	25	24	21
	kW	3.29	3.35	3.45	3.55	3.52	3.59	3.70	3.81	3.73	3.80	3.92	4.04	3.91	3.99	4.11	4.24	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56	
	Amps	12.2	12.5	12.9	13.3	13.1	13.5	13.9	14.4	14.3	14.6	15.1	15.7	15.3	15.6	16.2	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9	
85	HI PR	248	267	282	294	279	300	317	330	317	341	360	375	361	388	410	428	406	437	461	481	448	483	510	532	406	437	461	481	448	483	510	532	406	437	461	481	448	483	510	532	
	LO PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	129	137	150	160	134	142	155	165	129	137	150	160	134	142	155	165	
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0	
	S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
	ΔT	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	23	24	24	21	22	22	19	17	23	24	24	21	22	22	19	17	23	24	24	21					

		OUTDOOR AMBIENT TEMPERATURE																115°F							
		65°F				75°F				85°F				95°F				105°F							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
	kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
	Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-
	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
2250	kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
	Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-
	MBh	56.1	58.2	63.7	-	54.8	56.8	62.3	-	53.5	55.5	60.8	-	52.2	54.1	59.3	-	49.6	51.4	56.3	-	45.9	47.6	52.2	-
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-
	kW	4.09	4.18	4.31	-	4.40	4.49	4.63	-	4.67	4.77	4.92	-	4.91	5.02	5.18	-	5.12	5.23	5.40	-	5.29	5.41	5.58	-
	Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.1	-	22.1	22.7	23.5	-
	Hi PR	264	284	300	-	296	319	337	-	337	363	383	-	384	413	436	-	432	465	491	-	477	514	542	-
Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	
75	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0
	S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11
	kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72
	Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2
	Hi PR	262	282	297	310	294	316	334	348	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560
	Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165
	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0
	S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11
2250	kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72
	Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2
	Hi PR	262	282	297	310	294	316	334	348	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560
	Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165
	MBh	57.1	58.8	63.6	68.3	55.8	57.4	62.1	66.7	54.4	56.0	60.7	65.1	53.1	54.7	59.2	63.5	50.4	51.9	56.2	60.3	46.7	48.1	52.1	55.9
	S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10
	kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.62	5.34	5.45	5.63	5.82
	Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6
	Hi PR	267	287	303	316	299	322	340	355	341	366	387	404	388	417	441	460	436	470	496	517	482	519	548	571
Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
DB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions																						Amps = outdoor unit amps (comp.+fan)	
High and low pressures are measured at the liquid and suction service valves.																								kW = Total system power	

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)
kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6
	S/T	0.86	0.81	0.66	0.5	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.6	0.99	0.93	0.76	0.57
	ΔT	25	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16
	kW	4.09	4.18	4.31	4.4	4.40	4.49	4.64	4.78	4.67	4.77	4.93	5.1	4.91	5.02	5.18	5.35	5.12	5.23	5.40	5.6	5.29	5.41	5.59	5.77
	Amps	15.5	15.9	16.4	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.1	19.6	20.1	20.8	21.6	20.9	21.4	22.1	23.0	22.2	22.7	23.5	24.4
	HI PR	264	284	300	313.2	297	319	337	351	337	363	383	399.7	384	413	437	455	432	465	491	512.2	477	514	543	566
	LO PR	107	114	125	133.0	114	121	132	140	118	126	137	146.0	124	132	144	153	130	138	151	160.7	134	143	156	166
	MBh	58.1	59.4	63.4	67.8	56.7	58.0	61.9	66.2	55.4	56.6	60.5	64.6	54.0	55.2	59.0	63.1	51.3	52.5	56.0	59.9	47.6	48.6	51.9	55.5
	S/T	0.92	0.86	0.70	0.5	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60
	ΔT	22	21	18	15	22	21	18	15	23	21	18	15	22	21	19	15	21	21	18	15	19	20	17	14
85	kW	4.16	4.24	4.38	4.5	4.47	4.57	4.71	4.86	4.75	4.85	5.01	5.2	4.99	5.10	5.27	5.44	5.20	5.32	5.49	5.7	5.38	5.50	5.68	5.87
	Amps	15.8	16.2	16.7	17.4	17.1	17.6	18.1	18.8	18.6	19.1	19.8	20.5	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.4	22.6	23.1	23.9	24.9
	HI PR	270	290	306	319.5	302	326	344	358	344	370	391	407.7	392	422	445	464	441	474	501	522.4	487	524	553	577
	LO PR	110	117	127	135.6	116	123	135	143	120	128	140	148.9	126	135	147	156	133	141	154	163.9	137	146	159	170
	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
	S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	25	22	25	25	24	21
	kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.63	5.34	5.45	5.63	5.82
	Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6
	HI PR	267	287	303	316	300	322	340	355	341	367	387	404	388	417	441	460	436	470	496	517	482	519	548	572
LO PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
2250	MBh	59.1	60.3	63.1	67.3	57.7	58.8	61.6	65.8	56.4	57.4	60.2	64.2	55.0	56.0	58.7	62.6	52.2	53.2	55.8	59.5	48.4	49.3	51.7	55.1
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.77	1.00	1.00	0.96	0.78
	ΔT	23	23	22	19	24	23	22	19	23	23	22	19	22	23	22	19	21	22	22	19	20	20	20	18
	kW	4.19	4.28	4.41	4.55	4.51	4.60	4.75	4.90	4.79	4.89	5.05	5.21	5.03	5.14	5.31	5.49	5.24	5.36	5.53	5.72	5.42	5.55	5.73	5.92
	Amps	16.0	16.4	16.9	17.5	17.3	17.7	18.3	19.0	18.8	19.3	19.9	20.7	20.1	20.7	21.4	22.2	21.5	22.0	22.8	23.7	22.8	23.4	24.2	25.1
	HI PR	272	293	309	323	305	329	347	362	347	374	395	412	396	426	450	469	445	479	506	528	492	529	559	583
	LO PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	166	138	147	161	171

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1750	MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-											
		S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.61	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-											
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-											
		kW	4.00	4.08	4.21	-	4.31	4.40	4.54	-	4.58	4.68	4.84	-	4.82	4.93	5.09	-	5.03	5.14	5.31	-	5.20	5.32	5.50	-											
		Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.2	-	22.2	22.7	23.5	-											
	HI PR	249	268	283	-	280	301	318	-	318	342	362	-	362	390	412	-	408	439	463	-	451	485	512	-												
	LO PR	100	106	116	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	140	-	125	132	145	-												
	1500	MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-											
		S/T	0.65	0.54	0.38	-	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.62	0.43	-											
		ΔT	21	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	20	17	13	-											
kW		3.97	4.05	4.18	-	4.27	4.37	4.51	-	4.54	4.64	4.80	-	4.78	4.89	5.05	-	4.99	5.10	5.27	-	5.16	5.28	5.45	-												
Amps		15.4	15.8	16.3	-	16.7	17.1	17.7	-	18.1	18.6	19.2	-	19.4	19.9	20.6	-	20.7	21.2	22.0	-	22.0	22.5	23.3	-												
2250	HI PR	247	266	281	-	277	298	315	-	315	339	358	-	359	386	408	-	404	434	459	-	446	480	507	-												
	LO PR	99	105	115	-	104	111	121	-	108	115	126	-	114	121	132	-	119	127	138	-	123	131	143	-												
	MBh	55.6	57.7	63.2	-	54.3	56.3	61.7	-	53.0	55.0	60.2	-	51.8	53.6	58.8	-	49.2	51.0	55.8	-	45.5	47.2	51.7	-												
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-												
	ΔT	16	14	10	-	16	14	10	-	16	14	10	-	16	14	11	-	16	14	10	-	15	13	10	-												
2250	kW	4.03	4.12	4.25	-	4.34	4.44	4.58	-	4.62	4.72	4.88	-	4.86	4.97	5.13	-	5.07	5.18	5.36	-	5.25	5.37	5.55	-												
	Amps	15.7	16.1	16.6	-	17.0	17.4	18.0	-	18.5	19.0	19.6	-	19.8	20.3	21.0	-	21.1	21.6	22.4	-	22.4	23.0	23.7	-												
	HI PR	252	271	286	-	283	304	321	-	321	346	365	-	366	394	416	-	412	443	468	-	455	490	517	-												
	LO PR	101	107	117	-	106	113	123	-	110	118	128	-	116	123	135	-	122	129	141	-	126	134	146	-												

75	1750	MBh	56.3	58.0	62.7	67.3	55.0	56.6	61.3	65.8	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.6	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1
		S/T	0.78	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39
		ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11
		kW	4.03	4.12	4.25	4.39	4.34	4.44	4.58	4.73	4.62	4.72	4.88	5.04	4.86	4.97	5.14	5.31	5.07	5.18	5.36	5.54	5.25	5.37	5.55	5.74
		Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	19.0	19.6	20.4	19.8	20.3	21.0	21.8	21.1	21.6	22.4	23.3	22.4	23.0	23.8	24.7
		Hi PR	252	271	286	299	283	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	490	517	539
	LO PR	101	107	117	124	106	113	123	131	110	118	128	137	116	123	135	144	122	129	141	150	126	134	146	156	
	1500	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5
		S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.85	0.76	0.57	0.37
		ΔT	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	23	21	18	12
		kW	4.00	4.09	4.21	4.35	4.31	4.40	4.54	4.69	4.58	4.68	4.84	5.00	4.82	4.93	5.09	5.26	5.03	5.14	5.31	5.49	5.20	5.32	5.50	5.69
		Amps	15.5	15.9	16.5	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.2	19.6	20.1	20.8	21.6	20.9	21.4	22.2	23.0	22.2	22.7	23.5	24.4
Hi PR		249	268	283	296	280	301	318	332	318	343	362	377	363	390	412	430	408	439	463	483	451	485	512	534	
LO PR	100	106	116	123	105	112	122	130	109	116	127	135	115	122	133	142	120	128	140	149	125	133	145	154		
2250	MBh	56.6	58.3	63.1	67.7	55.3	56.9	61.6	66.1	53.9	55.5	60.1	64.5	52.6	54.2	58.7	63.0	50.0	51.5	55.7	59.8	46.3	47.7	51.6	55.4	
	S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
	ΔT	18	17	14	9	18	17	14	10	18	17	14	10	19	17	14	10	18	17	14	10	17	16	13	9	
	kW	4.06	4.15	4.28	4.42	4.38	4.47	4.62	4.77	4.66	4.76	4.92	5.08	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.59	5.29	5.41	5.59	5.79	
	Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9	
	Hi PR	254	274	289	302	285	307	324	338	325	349	369	385	370	398	420	438	416	448	473	493	460	495	522	545	
LO PR	102	108	118	126	107	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	157		

DB: Entering Indoor Dry Bulb Temperature
high and low pressures are measured at the liquid and suction service valves.

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1750	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	50.6	51.7	55.3	59.1	46.9	47.9	51.2	54.7	46.9	47.9	51.2	54.7							
		S/T	0.85	0.80	0.65	0.5	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.5	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.6	1.00	0.92	0.75	0.56	1.00	0.92	0.75	0.56							
		ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	25	23	20	16	25	23	20	16							
		kW	4.06	4.15	4.28	4.4	4.38	4.48	4.62	4.77	4.66	4.76	4.92	5.1	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.6	5.29	5.41	5.59	5.79	5.29	5.41	5.59	5.79							
		Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9	22.6	23.2	24.0	24.9							
	HI PR	254	274	289	301.6	286	307	324	338	325	349	369	384.9	370	398	420	438	416	448	473	493.1	460	495	522	545	460	495	522	545								
	LO PR	102	108	118	125.7	107	114	125	133	112	119	130	138.0	117	125	136	145	123	131	143	152.0	127	135	148	157	127	135	148	157								
	1500	MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2	45.5	46.5	49.7	53.2							
		S/T	0.81	0.76	0.62	0.5	0.84	0.79	0.64	0.48	0.86	0.81	0.66	0.5	0.89	0.83	0.68	0.51	0.92	0.87	0.70	0.5	0.93	0.87	0.71	0.53	0.93	0.87	0.71	0.53							
		ΔT	28	26	23	18	28	27	23	19	28	27	23	19	28	27	24	19	28	27	23	19	26	25	22	17	26	25	22	17							
kW		4.03	4.12	4.25	4.4	4.34	4.44	4.58	4.73	4.62	4.72	4.88	5.0	4.86	4.97	5.14	5.31	5.07	5.18	5.36	5.5	5.25	5.37	5.55	5.74	5.25	5.37	5.55	5.74								
Amps		15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	19.0	19.6	20.4	19.8	20.3	21.0	21.8	21.1	21.6	22.4	23.3	22.4	23.0	23.8	24.7	22.4	23.0	23.8	24.7								
HI PR	252	271	286	298.6	283	304	321	335	321	346	365	381.0	366	394	416	434	412	443	468	488.2	455	490	517	539	455	490	517	539									
LO PR	101	107	117	124.5	106	113	123	132	110	118	128	136.7	116	123	135	144	122	129	141	150.5	126	134	146	156	126	134	146	156									
2250	MBh	57.6	58.8	62.9	67.2	56.2	57.5	61.4	65.6	54.9	56.1	59.9	64.1	53.6	54.7	58.5	62.5	50.9	52.0	55.6	59.4	47.1	48.2	51.5	55.0	47.1	48.2	51.5	55.0								
	S/T	0.86	0.81	0.66	0.5	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.6	1.00	0.93	0.76	0.56	1.00	0.93	0.76	0.56								
	ΔT	20	19	17	14	21	20	17	14	21	20	17	14	21	20	17	14	21	20	17	14	19	18	16	13	19	18	16	13								
	kW	4.10	4.18	4.32	4.5	4.42	4.51	4.66	4.81	4.70	4.80	4.96	5.1	4.94	5.06	5.22	5.40	5.16	5.27	5.45	5.6	5.34	5.46	5.64	5.84	5.34	5.46	5.64	5.84								
	Amps	16.0	16.4	16.9	17.6	17.3	17.7	18.3	19.0	18.8	19.3	20.0	20.7	20.2	20.7	21.4	22.2	21.5	22.1	22.8	23.7	22.8	23.4	24.2	25.2	22.8	23.4	24.2	25.2								
HI PR	257	277	292	304.6	288	310	328	342	328	353	373	388.7	373	402	424	443	420	452	477	498.0	464	500	528	550	464	500	528	550									
LO PR	103	109	119	127.0	108	115	126	134	113	120	131	139.4	118	126	137	146	124	132	144	153.5	128	137	149	159	128	137	149	159									

85	1750	Mbh	58.3	59.4	62.2	66.4	56.9	58.1	60.8	64.9	55.6	56.7	59.4	63.3	54.2	55.3	57.9	61.8	51.5	52.5	55.0	58.7	47.7	48.7	51.0	54.4	
		S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72	
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	22	28	27	26	22	27	27	26	22	25	25	24	21
		kW	4.10	4.19	4.32	4.46	4.42	4.51	4.66	4.81	4.70	4.80	4.96	5.12	4.95	5.06	5.22	5.40	5.16	5.27	5.45	5.63	5.34	5.46	5.64	5.84	
		Amps	16.0	16.4	16.9	17.6	17.3	17.7	18.3	19.0	18.8	19.3	20.0	20.7	20.2	20.7	21.4	22.2	21.5	22.1	22.8	23.7	22.8	23.4	24.2	25.2	
	Hi PR	25.7	27.7	29.2	30.5	28.8	31.0	32.8	34.2	32.8	35.3	37.3	38.9	37.4	40.2	42.4	44.3	42.0	45.2	47.8	49.8	46.4	50.0	52.8	55.0		
	LO PR	103	109	119	127	108	115	126	134	113	120	131	139	118	126	138	146	124	132	144	153	128	137	149	159		
	1500	Mbh	56.6	57.7	60.4	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.3	47.2	49.5	52.8	
		S/T	0.85	0.82	0.74	0.60	0.88	0.85	0.77	0.62	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.98	0.94	0.85	0.69	
		ΔT	29	29	27	24	30	29	28	24	30	29	28	24	30	30	28	24	30	29	28	24	28	27	26	22	
kW		4.06	4.15	4.28	4.42	4.38	4.48	4.62	4.77	4.66	4.76	4.92	5.08	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.59	5.29	5.41	5.59	5.79		
Amps		15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5	22.6	23.2	24.0	24.9		
2250	Hi PR	25.4	27.4	28.9	30.2	28.6	30.7	32.4	33.8	32.5	34.9	36.9	38.5	37.0	39.8	42.0	43.8	41.6	44.8	47.3	49.3	46.0	49.5	52.2	54.5		
	LO PR	102	108	118	126	107	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	157		
	Mbh	58.6	59.7	62.5	66.7	57.2	58.3	61.1	65.2	55.9	56.9	59.6	63.6	54.5	55.6	58.2	62.1	51.8	52.8	55.3	59.0	48.0	48.9	51.2	54.6		
	S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73		
	ΔT	22	21	20	17	22	22	20	18	22	22	20	18	22	22	21	18	21	21	20	18	20	20	19	16		
2250	kW	4.13	4.22	4.35	4.49	4.45	4.55	4.70	4.85	4.74	4.84	5.00	5.17	4.99	5.10	5.27	5.45	5.20	5.32	5.49	5.68	5.38	5.51	5.69	5.89		
	Amps	16.1	16.5	17.1	17.7	17.5	17.9	18.5	19.2	19.0	19.5	20.2	20.9	20.4	20.9	21.6	22.4	21.7	22.3	23.0	23.9	23.0	23.6	24.4	25.4		
	Hi PR	26.0	27.9	29.5	30.8	29.1	31.3	33.1	34.5	33.1	35.6	37.6	39.3	37.7	40.6	42.9	44.7	42.4	45.7	48.2	50.3	46.9	50.5	53.3	55.6		
	LO PR	104	110	120	128	110	111	127	135	114	121	132	141	120	127	139	148	125	133	146	155	130	138	151	160		

DB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181A*	ACNF18XX16D*		16,800	12,200	13.00	10.80	600	6687909
	ACNF24XX16D*		17,000	12,400	13.00	10.80	600	6687910
	ARPT18B14A*		17,400	12,700	13.00	11.00	600	6687911
	ARPT24B14A*		17,200	12,500	13.00	11.00	600	6687912
	ARUF18B14A*		17,200	12,500	13.00	11.00	600	6687913
	ARUF18B14A*+TXV		17,200	12,500	13.00	11.00	600	6687914
	ARUF24B14C*		17,200	12,500	13.00	11.00	600	7084855
	ARUF24B14C*+TXV		17,200	12,500	13.50	11.00	600	7084856
	ASPT24B14A*		17,600	12,800	14.00	12.00	605	6687919
	ASPT30C14A*		18,000	13,100	14.00	12.00	580	6687920
	ASUF29B14A*		17,600	12,800	13.50	11.50	605	6687921
	ASUF29B14A*+TXV		17,600	12,800	14.00	12.00	605	6687922
	AVPTC24B14A*		17,600	12,800	14.00	12.00	600	6687923
	AVPTC30C14A*		18,000	13,100	14.00	12.00	615	6687924
	AWUF18XX16B*		17,400	12,700	13.00	11.00	650	6687925
	AWUF31XX16A*		17,400	12,700	14.00	11.50	600	6687926
	CA*F1824*6D*	AMEH960403BXA*	18,000	13,100	14.00	11.60	600	6946144
	CA*F1824*6D*	G*VM970603BNA*	17,800	13,000	14.00	11.50	600	7359019
	CA*F1824*6D*	G*VC960603BNA*	17,800	13,000	14.00	11.50	600	7359017
	CA*F1824*6D*	A*EH800603B*A*	17,800	13,000	14.00	11.50	640	6946143
	CA*F1824*6D*	G*VC960403BNA*	17,800	13,000	14.00	11.50	625	7359016
	CA*F1824*6D*	G*VM970803BNA*	17,800	13,000	14.00	11.50	630	7359020
	CA*F1824*6D*	G*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366809
	CA*F1824*6D*	A*VC960803BNA*	17,800	13,000	14.00	11.50	630	7359013
	CA*F1824*6D*	G*VC950704CXB*	17,800	13,000	14.00	11.50	640	6687933
	CA*F1824*6D*	G*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366814
	CA*F1824*6D*	A*VC960403BNA*	17,800	13,000	14.00	11.50	625	7359011
	CA*F1824*6D*	G*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366819
	CA*F1824*6D*	A*VC80604B*B*	17,700	12,900	14.00	11.60	620	6687927
	CA*F1824*6D*	A*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366930
	CA*F1824*6D*	A*VM960603BXB*	18,000	13,100	14.00	11.60	600	6687929
	CA*F1824*6D*	G*VC960803BNA*	17,800	13,000	14.00	11.50	630	7359018
	CA*F1824*6D*	A*VM970803BNA*	17,800	13,000	14.00	11.50	630	7359015
	CA*F1824*6D*	G*VC80604B*B*	17,700	12,900	14.00	11.60	620	6687931
	CA*F1824*6D*	G*E80603B*B*	17,800	13,000	14.00	11.50	640	6687930
	CA*F1824*6D*	A*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366915
	CA*F1824*6D*	A*VM970603BNA*	17,800	13,000	14.00	11.50	600	7359014
	CA*F1824*6D*	A*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366925
	CA*F1824*6D*	G*VM960603BXB*	18,000	13,100	14.00	11.50	670	6687934
	CA*F1824*6D*	G*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366824
	CA*F1824*6D*	A*VC950453BXB*	18,000	13,100	14.00	11.60	600	6687928
	CA*F1824*6D*	A*VC960603BNA*	17,800	13,000	14.00	11.50	600	7359012
	CA*F1824*6D*	GME950403BXA*	18,000	13,100	14.00	11.60	600	6687935
	CA*F1824*6D*	G*VC950453BXB*	17,800	13,000	14.00	11.50	640	6687932
	CA*F1824*6D*	A*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366920
	CA*F1824*6D*+EEP		17,800	13,000	13.00	11.00	600	6687936
	CA*F1824*6D*+MBVC1200**-1A*		18,200	13,300	14.00	11.50	640	6687937
	CA*F1824*6D*+TXV	G*VM970603BNA*	17,800	13,000	14.00	11.50	600	7359029
	CA*F1824*6D*+TXV	A*VC960803BNA*	17,800	13,000	14.00	11.50	630	7359023
	CA*F1824*6D*+TXV	G*VC960803BNA*	17,800	13,000	14.00	11.50	630	7359028
	CA*F1824*6D*+TXV	A*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366916
	CA*F1824*6D*+TXV	A*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366926
	CA*F1824*6D*+TXV	G*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366810
	CA*F1824*6D*+TXV	G*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366825
	CA*F1824*6D*+TXV	G*VC960403BNA*	17,800	13,000	14.00	11.50	625	7359026
	CA*F1824*6D*+TXV	A*VC960403BNA*	17,800	13,000	14.00	11.50	625	7359021
	CA*F1824*6D*+TXV	A*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366931
	CA*F1824*6D*+TXV	A*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366921
	CA*F1824*6D*+TXV	G*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366820

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181A* (cont.)	CA*F1824*6D*+TXV	G*VC960603BNA*	17,800	13,000	14.00	11.50	600	7359027
	CA*F1824*6D*+TXV	A*VM970603BNA*	17,800	13,000	14.00	11.50	600	7359024
	CA*F1824*6D*+TXV	G*VM970803BNA*	17,800	13,000	14.00	11.50	630	7359030
	CA*F1824*6D*+TXV	G*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366815
	CA*F1824*6D*+TXV	A*VM970803BNA*	17,800	13,000	14.00	11.50	630	7359025
	CA*F1824*6D*+TXV	A*VC960603BNA*	17,800	13,000	14.00	11.50	600	7359022
	CA*F3030*6D*+EEP		18,000	13,100	13.00	11.00	650	6687938
	CA*F3030*6D*+EEP+TXV		18,000	13,100	13.00	11.00	650	6687939
	CA*F3131*6D*+EEP		18,000	13,100	13.00	11.00	650	6687940
	CA*F3131*6D*+EEP+TXV		18,000	13,100	13.00	11.00	650	6687941
	CA*F3636*6D*	A*VC960803BNA*	18,400	13,400	14.00	11.50	630	7359033
	CA*F3636*6D*	G*VM970803BNA*	18,400	13,400	14.00	11.50	630	7359040
	CA*F3636*6D*	A*VM970803BNA*	18,400	13,400	14.00	11.50	630	7359035
	CA*F3636*6D*	G*VC960803BNA*	18,400	13,400	14.00	11.50	630	7359038
	CA*F3636*6D*	A*VC960403BNA*	18,400	13,400	14.00	11.50	625	7359031
	CA*F3636*6D*	G*VC960603BNA*	18,400	13,400	14.00	11.50	600	7359037
	CA*F3636*6D*	A*VC960603BNA*	18,400	13,400	14.00	11.50	600	7359032
	CA*F3636*6D*	G*VM970603BNA*	18,400	13,400	14.00	11.50	600	7359039
	CA*F3636*6D*	A*VM970603BNA*	18,400	13,400	14.00	11.50	600	7359034
	CA*F3636*6D*	G*VC960403BNA*	18,400	13,400	14.00	11.50	625	7359036
	CA*F3636*6D*+TXV	G*VC960803BNA*	18,400	13,400	14.00	11.50	630	7359048
	CA*F3636*6D*+TXV	A*VC960403BNA*	18,400	13,400	14.00	11.50	625	7359041
	CA*F3636*6D*+TXV	G*VM970803BNA*	18,400	13,400	14.00	11.50	630	7359050
	CA*F3636*6D*+TXV	A*VM970803BNA*	18,400	13,400	14.00	11.50	630	7359045
	CA*F3636*6D*+TXV	A*VM970603BNA*	18,400	13,400	14.00	11.50	600	7359044
	CA*F3636*6D*+TXV	A*VC960803BNA*	18,400	13,400	14.00	11.50	630	7359043
	CA*F3636*6D*+TXV	G*VC960603BNA*	18,400	13,400	14.00	11.50	600	7359047
	CA*F3636*6D*+TXV	G*VM970603BNA*	18,400	13,400	14.00	11.50	600	7359049
	CA*F3636*6D*+TXV	G*VC960403BNA*	18,400	13,400	14.00	11.50	625	7359046
	CA*F3636*6D*+TXV	A*VC960603BNA*	18,400	13,400	14.00	11.50	600	7359042
	CAPT3131*4A*	A*VC950714CXB*	18,000	13,100	14.00	11.50	600	6687945
	CAPT3131*4A*	GME950403BXA*	18,000	13,100	14.00	11.50	600	6687956
	CAPT3131*4A*	A*VC950704CXB*	18,000	13,100	14.00	11.50	600	6687944
	CAPT3131*4A*	G*VC80604B*B*	18,000	13,100	14.00	11.50	620	6687950
	CAPT3131*4A*	AMEH960603BXA*	18,000	13,100	14.00	11.50	600	6946147
	CAPT3131*4A*	G*VC950714CXB*	18,000	13,100	14.00	11.50	600	6687953
	CAPT3131*4A*	G*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366811
	CAPT3131*4A*	G*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366826
	CAPT3131*4A*	G*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366821
	CAPT3131*4A*	G*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359059
	CAPT3131*4A*	A*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359055
	CAPT3131*4A*	G*VM960604CXB*	18,000	13,100	14.00	11.50	600	6687955
	CAPT3131*4A*	G*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366816
	CAPT3131*4A*	GME950603BXA*	18,000	13,100	14.00	11.50	600	6687957
	CAPT3131*4A*	A*VM960603BXB*	18,000	13,100	14.00	11.50	625	6687946
	CAPT3131*4A*	A*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366917
	CAPT3131*4A*	ADV80603B*B*	18,000	13,100	14.00	11.50	675	6687948
	CAPT3131*4A*	G*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359057
	CAPT3131*4A*	G*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359056
	CAPT3131*4A*	A*EH800603B*A*	18,000	13,100	14.00	11.50	600	6946145
	CAPT3131*4A*	G*VC950453BXB*	18,000	13,100	14.00	11.50	650	6687951
	CAPT3131*4A*	AMEH960403BXA*	18,000	13,100	14.00	11.50	600	6946146
	CAPT3131*4A*	A*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366932
	CAPT3131*4A*	A*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359054
	CAPT3131*4A*	G*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359060
	CAPT3131*4A*	G*E80603B*B*	18,000	13,100	14.00	11.50	600	6687949
	CAPT3131*4A*	G*VM960603BXB*	18,000	13,100	14.00	11.50	625	6687954
	CAPT3131*4A*	A*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366922
	CAPT3131*4A*	A*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359051

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181A* (cont.)	CAPT3131*4A*	A*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359053
	CAPT3131*4A*	A*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359052
	CAPT3131*4A*	G*VC950704CXB*	18,000	13,100	14.00	11.50	600	6687952
	CAPT3131*4A*	A*VC950453BXB*	18,000	13,100	14.00	11.50	590	6687943
	CAPT3131*4A*	A*VM960604CXB*	18,000	13,100	14.00	11.50	600	6687947
	CAPT3131*4A*	G*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359058
	CAPT3131*4A*	A*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366927
	CAPT3131*4A*	A*VC80604B*B*	18,000	13,100	14.00	11.50	620	6687942
	CAPT3131*4A*+EEP		18,000	13,100	13.00	11.00	600	6687958
	CAPT3131*4A*+MBVC1200**-1A*		18,000	13,100	14.00	11.50	600	6687959
	CHPF1824A6C*+EEP		18,000	13,100	13.00	11.00	600	6687960
	CHPF2430B6C*	G*VM960603BXB*	18,200	13,300	14.00	11.50	675	6687967
	CHPF2430B6C*	G*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366812
	CHPF2430B6C*	A*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359063
	CHPF2430B6C*	A*VM960603BXB*	18,400	13,400	14.00	11.60	600	6687963
	CHPF2430B6C*	A*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359062
	CHPF2430B6C*	G*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366822
	CHPF2430B6C*	G*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359066
	CHPF2430B6C*	G*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359068
	CHPF2430B6C*	G*E80603B*B*	18,000	13,100	14.00	11.50	640	6687964
	CHPF2430B6C*	A*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359065
	CHPF2430B6C*	G*VC950453BXB*	18,200	13,300	14.00	11.50	650	6687966
	CHPF2430B6C*	A*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366928
	CHPF2430B6C*	G*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366817
	CHPF2430B6C*	G*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359069
	CHPF2430B6C*	G*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366827
	CHPF2430B6C*	A*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359061
	CHPF2430B6C*	A*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366933
	CHPF2430B6C*	A*EH800603B*A*	18,000	13,100	14.00	11.50	640	6946148
	CHPF2430B6C*	A*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359064
	CHPF2430B6C*	G*VC80604B*B*	17,700	12,900	14.00	11.50	660	6687965
	CHPF2430B6C*	A*VC950453BXB*	18,400	13,400	14.00	11.60	600	6687962
	CHPF2430B6C*	A*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366923
	CHPF2430B6C*	A*VC80604B*B*	17,700	12,900	14.00	11.50	660	6687961
	CHPF2430B6C*	A*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366918
	CHPF2430B6C*	AMEH960403BXA*	18,400	13,400	14.00	11.60	600	6946149
	CHPF2430B6C*	G*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359070
	CHPF2430B6C*	GME950403BXA*	18,400	13,400	14.00	11.60	600	6687968
	CHPF2430B6C*	G*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359067
	CHPF2430B6C*+EEP		18,000	13,100	13.00	11.00	600	6687969
	CHPF2430B6C*+MBVC1200**-1A*		18,200	13,300	14.00	11.50	650	6687970
	CHPF2430B6C*+TXV	A*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366934
	CHPF2430B6C*+TXV	G*EC960803BNA*	17,800	13,000	14.00	11.50	575	7366828
	CHPF2430B6C*+TXV	A*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366924
	CHPF2430B6C*+TXV	A*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359072
	CHPF2430B6C*+TXV	G*EC960402BNA*	17,800	13,000	14.00	11.50	600	7366818
	CHPF2430B6C*+TXV	G*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359078
	CHPF2430B6C*+TXV	G*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359080
	CHPF2430B6C*+TXV	G*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366813
	CHPF2430B6C*+TXV	G*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359076
	CHPF2430B6C*+TXV	G*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359077
	CHPF2430B6C*+TXV	A*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359075
	CHPF2430B6C*+TXV	A*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359074
	CHPF2430B6C*+TXV	G*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359079
	CHPF2430B6C*+TXV	A*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359071
	CHPF2430B6C*+TXV	G*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366823
	CHPF2430B6C*+TXV	A*EC960302BNA*	17,800	13,000	14.00	11.50	600	7366919
	CHPF2430B6C*+TXV	A*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359073
	CHPF2430B6C*+TXV	A*EC960603BNA*	17,400	12,700	14.00	11.50	550	7366929

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181A* (cont.)	CHPF3636B6C*	G*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359088
	CHPF3636B6C*	G*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359089
	CHPF3636B6C*	G*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359086
	CHPF3636B6C*	A*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359082
	CHPF3636B6C*	A*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359084
	CHPF3636B6C*	G*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359090
	CHPF3636B6C*	A*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359081
	CHPF3636B6C*	A*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359085
	CHPF3636B6C*	A*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359083
	CHPF3636B6C*	G*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359087
	CHPF3636B6C*+TXV	A*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359091
	CHPF3636B6C*+TXV	G*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359097
	CHPF3636B6C*+TXV	G*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359100
	CHPF3636B6C*+TXV	A*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359095
	CHPF3636B6C*+TXV	G*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359099
	CHPF3636B6C*+TXV	G*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359096
	CHPF3636B6C*+TXV	A*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359094
	CHPF3636B6C*+TXV	A*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359092
	CHPF3636B6C*+TXV	G*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359098
	CHPF3636B6C*+TXV	A*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359093
	CSCF1824N6D*	G*VC80604B*B*	17,700	12,900	14.00	11.50	660	6687974
	CSCF1824N6D*	A*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359104
	CSCF1824N6D*	G*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359106
	CSCF1824N6D*	G*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359110
	CSCF1824N6D*	G*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359107
	CSCF1824N6D*	G*VM960603BXB*	18,200	13,300	14.00	11.50	670	6687976
	CSCF1824N6D*	A*EH800603B*A*	18,000	13,100	14.00	11.50	640	6946150
	CSCF1824N6D*	A*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359102
	CSCF1824N6D*	A*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359105
	CSCF1824N6D*	G*VC950453BXB*	18,200	13,300	14.00	11.50	650	6687975
	CSCF1824N6D*	A*VC950453BXB*	18,000	13,100	14.00	11.60	650	6687972
	CSCF1824N6D*	A*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359101
	CSCF1824N6D*	G*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359109
	CSCF1824N6D*	A*VC80604B*B*	17,700	12,900	14.00	11.50	660	6687971
	CSCF1824N6D*	G*E80603B*B*	18,000	13,100	14.00	11.50	640	6687973
	CSCF1824N6D*	A*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359103
	CSCF1824N6D*	G*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359108
	CSCF1824N6D*+EEP		18,000	13,100	13.00	11.00	600	6687977
	CSCF1824N6D*+TXV	G*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359117
	CSCF1824N6D*+TXV	A*VC960603BNA*	18,000	13,100	14.00	11.50	600	7359112
	CSCF1824N6D*+TXV	A*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359114
	CSCF1824N6D*+TXV	A*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359111
	CSCF1824N6D*+TXV	G*VM970603BNA*	18,000	13,100	14.00	11.50	600	7359119
	CSCF1824N6D*+TXV	A*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359115
	CSCF1824N6D*+TXV	G*VM970803BNA*	18,000	13,100	14.00	11.50	630	7359120
	CSCF1824N6D*+TXV	G*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359118
	CSCF1824N6D*+TXV	G*VC960403BNA*	18,000	13,100	14.00	11.50	625	7359116
	CSCF1824N6D*+TXV	A*VC960803BNA*	18,000	13,100	14.00	11.50	630	7359113
	CSCF3036N6D*	G*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359126
	CSCF3036N6D*	G*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359127
	CSCF3036N6D*	A*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359122
	CSCF3036N6D*	G*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359128
	CSCF3036N6D*	G*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359129
	CSCF3036N6D*	G*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359130
	CSCF3036N6D*	A*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359123
	CSCF3036N6D*	A*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359124
	CSCF3036N6D*	A*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359121
	CSCF3036N6D*	A*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359125
	CSCF3036N6D*+TXV	A*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359134

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181A* (cont.)	CSCF3036N6D*+TXV	A*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359131
	CSCF3036N6D*+TXV	A*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359135
	CSCF3036N6D*+TXV	G*VM970603BNA*	18,200	13,300	14.00	11.50	600	7359139
	CSCF3036N6D*+TXV	G*VC960403BNA*	18,200	13,300	14.00	11.50	625	7359136
	CSCF3036N6D*+TXV	G*VM970803BNA*	18,200	13,300	14.00	11.50	630	7359140
	CSCF3036N6D*+TXV	A*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359132
	CSCF3036N6D*+TXV	A*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359133
	CSCF3036N6D*+TXV	G*VC960603BNA*	18,200	13,300	14.00	11.50	600	7359137
	CSCF3036N6D*+TXV	G*VC960803BNA*	18,200	13,300	14.00	11.50	630	7359138
ANX13 0241A*	ACNF24XX16D*		22,400	16,600	13.00	11.00	770	6687978
	ACNF30XX16D*		22,600	16,700	13.00	11.00	845	6687979
	ARPT24B14A*		22,400	16,600	13.00	11.00	800	6687980
	ARUF24B14C*		22,000	16,300	13.00	11.00	800	7084863
	ARUF24B14C*+TXV		22,000	16,300	13.00	11.00	800	7084864
	ASPT24B14A*		23,000	17,000	13.80	11.80	810	6687985
	ASPT30C14A*		23,400	17,300	14.00	12.00	845	6687986
	ASUF29B14A*		23,000	17,000	13.50	11.50	810	6687987
	ASUF29B14A*+TXV		23,000	17,000	13.80	11.80	810	6687988
	AVPTC24B14A*		22,600	16,700	14.00	12.00	800	6687989
	AVPTC30C14A*		23,400	17,300	14.00	12.00	780	6687990
	AWUF24XX16B*		23,000	17,000	13.00	11.00	800	6687991
	AWUF30XX16B*		23,200	17,200	13.00	11.00	800	6687992
	AWUF31XX16A*		23,000	17,000	14.00	11.30	800	6687993
	AWUF32XX16A*		23,000	17,000	14.00	11.30	800	6687994
	CA*F1824*6D*	A*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359146
	CA*F1824*6D*	GME950403BXA*	23,000	17,000	14.00	11.60	800	6688004
	CA*F1824*6D*	G*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359151
	CA*F1824*6D*	A*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359141
	CA*F1824*6D*	A*VC950704CXB*	23,000	17,000	14.00	11.60	800	6687997
	CA*F1824*6D*	A*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366950
	CA*F1824*6D*	A*VM960603BXB*	23,000	17,000	14.00	11.60	800	6687998
	CA*F1824*6D*	G*VC950453BXB*	23,000	17,000	14.00	11.50	800	6688001
	CA*F1824*6D*	G*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359152
	CA*F1824*6D*	A*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366940
	CA*F1824*6D*	A*VC950453BXB*	23,000	17,000	14.00	11.60	800	6687996
	CA*F1824*6D*	G*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366839
	CA*F1824*6D*	A*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366945
	CA*F1824*6D*	G*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359154
	CA*F1824*6D*	A*VC80604B*B*	23,000	17,000	14.00	11.60	820	6687995
	CA*F1824*6D*	AMEH960603BXA*	22,800	16,900	13.80	11.50	800	6946153
	CA*F1824*6D*	G*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359149
	CA*F1824*6D*	G*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359148
	CA*F1824*6D*	G*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366844
	CA*F1824*6D*	G*VM960603BXB*	23,000	17,000	14.00	11.50	800	6688003
	CA*F1824*6D*	A*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359147
	CA*F1824*6D*	G*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359153
	CA*F1824*6D*	G*E80603B*B*	23,000	17,000	14.00	11.50	860	6687999
	CA*F1824*6D*	G*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366829
	CA*F1824*6D*	AMEH960403BXA*	23,000	17,000	14.00	11.60	800	6946152
	CA*F1824*6D*	G*VC950704CXB*	23,000	17,000	14.00	11.50	800	6688002
	CA*F1824*6D*	A*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359144
	CA*F1824*6D*	G*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366834
	CA*F1824*6D*	GME950603BXA*	22,800	16,900	13.80	11.50	800	6688005
	CA*F1824*6D*	A*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366935
	CA*F1824*6D*	G*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359150
	CA*F1824*6D*	A*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359142
	CA*F1824*6D*	A*EH800603B*A*	23,000	17,000	14.00	11.50	860	6946151
	CA*F1824*6D*	A*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359143

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241A* (cont.)	CA*F1824*6D*	G*VC80604B*B*	23,000	17,000	14.00	11.60	820	6688000
	CA*F1824*6D*	A*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359145
	CA*F1824*6D*+EEP		23,000	17,000	13.00	11.00	800	6688006
	CA*F1824*6D*+MBVC1200**--1A*		23,000	17,000	14.00	11.50	800	6688007
	CA*F1824*6D*+TXV	G*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359163
	CA*F1824*6D*+TXV	G*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366835
	CA*F1824*6D*+TXV	G*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366845
	CA*F1824*6D*+TXV	A*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359158
	CA*F1824*6D*+TXV	A*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359160
	CA*F1824*6D*+TXV	A*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366946
	CA*F1824*6D*+TXV	G*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359167
	CA*F1824*6D*+TXV	G*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359164
	CA*F1824*6D*+TXV	G*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359162
	CA*F1824*6D*+TXV	G*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359166
	CA*F1824*6D*+TXV	A*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359156
	CA*F1824*6D*+TXV	G*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366830
	CA*F1824*6D*+TXV	G*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359165
	CA*F1824*6D*+TXV	A*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366936
	CA*F1824*6D*+TXV	A*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366951
	CA*F1824*6D*+TXV	A*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359155
	CA*F1824*6D*+TXV	A*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359159
	CA*F1824*6D*+TXV	G*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366840
	CA*F1824*6D*+TXV	A*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359157
	CA*F1824*6D*+TXV	A*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359161
	CA*F1824*6D*+TXV	A*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366941
	CA*F1824*6D*+TXV	G*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359168
	CA*F3030*6D*+EEP		23,000	17,000	13.00	11.00	800	6688008
	CA*F3030*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6688009
	CA*F3131*6D*+EEP		23,000	17,000	13.00	11.00	800	6688010
	CA*F3131*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6688011
	CA*F3636*6D*	A*VC960803BNA*	23,600	17,500	14.00	11.50	810	7359171
	CA*F3636*6D*	A*VM970803BNA*	23,600	17,500	14.00	11.50	810	7359173
	CA*F3636*6D*	G*VM970603BNA*	23,600	17,500	14.00	11.50	815	7359177
	CA*F3636*6D*	G*VM970803BNA*	23,600	17,500	14.00	11.50	810	7359178
	CA*F3636*6D*	G*VC960603BNA*	23,600	17,500	14.00	11.50	815	7359175
	CA*F3636*6D*	G*VC960803BNA*	23,600	17,500	14.00	11.50	810	7359176
	CA*F3636*6D*	A*VM970603BNA*	23,600	17,500	14.00	11.50	815	7359172
	CA*F3636*6D*	A*VC960603BNA*	23,600	17,500	14.00	11.50	815	7359170
	CA*F3636*6D*	G*VC960403BNA*	23,600	17,500	14.00	11.50	805	7359174
	CA*F3636*6D*	A*VC960403BNA*	23,600	17,500	14.00	11.50	805	7359169
	CA*F3636*6D*+EEP		23,000	17,000	13.00	11.00	800	6688012
	CA*F3636*6D*+EEP+TXV		23,000	17,000	13.00	11.00	800	6688013
	CA*F3636*6D*+TXV	G*VC960803BNA*	23,600	17,500	14.00	11.50	810	7359186
	CA*F3636*6D*+TXV	G*VC960603BNA*	23,600	17,500	14.00	11.50	815	7359185
	CA*F3636*6D*+TXV	A*VC960403BNA*	23,600	17,500	14.00	11.50	805	7359179
	CA*F3636*6D*+TXV	G*VM970603BNA*	23,600	17,500	14.00	11.50	815	7359187
	CA*F3636*6D*+TXV	A*VM970603BNA*	23,600	17,500	14.00	11.50	815	7359182
	CA*F3636*6D*+TXV	G*VC960403BNA*	23,600	17,500	14.00	11.50	805	7359184
	CA*F3636*6D*+TXV	A*VC960803BNA*	23,600	17,500	14.00	11.50	810	7359181
	CA*F3636*6D*+TXV	A*VC960603BNA*	23,600	17,500	14.00	11.50	815	7359180
	CA*F3636*6D*+TXV	A*VM970803BNA*	23,600	17,500	14.00	11.50	810	7359183
	CA*F3636*6D*+TXV	G*VM970803BNA*	23,600	17,500	14.00	11.50	810	7359188
	CA*F3743*6D*	G*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359192
	CA*F3743*6D*	G*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359191
	CA*F3743*6D*	A*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359189
	CA*F3743*6D*	A*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359190
	CA*F3743*6D*+TXV	A*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359193
	CA*F3743*6D*+TXV	A*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359194
	CA*F3743*6D*+TXV	G*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359195
	CA*F3743*6D*+TXV	G*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359196

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241A* (cont.)	CAPT3131*4A*	A*EH800603B*A*	23,000	17,000	14.00	11.50	800	6946154
	CAPT3131*4A*	GME950603BXA*	23,000	17,000	14.00	11.50	800	6688029
	CAPT3131*4A*	G*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366836
	CAPT3131*4A*	G*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359206
	CAPT3131*4A*	G*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359204
	CAPT3131*4A*	G*VC950453BxB*	23,000	17,000	14.00	11.50	800	6688023
	CAPT3131*4A*	AMEH960603BXA*	23,000	17,000	14.00	11.50	800	6946156
	CAPT3131*4A*	GME950403BXA*	23,000	17,000	14.00	11.50	800	6688028
	CAPT3131*4A*	G*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359209
	CAPT3131*4A*	G*VM960603BxB*	23,000	17,000	14.00	11.50	820	6688026
	CAPT3131*4A*	A*VM960604CXB*	23,000	17,000	14.00	11.50	800	6688019
	CAPT3131*4A*	G*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366841
	CAPT3131*4A*	G*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366831
	CAPT3131*4A*	A*VM960603BxB*	23,000	17,000	14.00	11.50	820	6688018
	CAPT3131*4A*	A*VC950453BxB*	23,000	17,000	14.00	11.50	800	6688015
	CAPT3131*4A*	AMEH960403BXA*	23,000	17,000	14.00	11.50	800	6946155
	CAPT3131*4A*	ADVC80603B*B*	23,000	17,000	14.00	11.50	800	6688020
	CAPT3131*4A*	G*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359208
	CAPT3131*4A*	A*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359198
	CAPT3131*4A*	A*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359201
	CAPT3131*4A*	A*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366952
	CAPT3131*4A*	G*VC950704CXB*	23,000	17,000	14.00	11.50	800	6688024
	CAPT3131*4A*	A*VC950704CXB*	23,000	17,000	14.00	11.50	800	6688016
	CAPT3131*4A*	A*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359203
	CAPT3131*4A*	G*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359210
	CAPT3131*4A*	A*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366937
	CAPT3131*4A*	A*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366942
	CAPT3131*4A*	A*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359197
	CAPT3131*4A*	A*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359199
	CAPT3131*4A*	G*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366846
	CAPT3131*4A*	G*VC80604B*B*	23,000	17,000	14.00	11.50	830	6688022
	CAPT3131*4A*	A*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359200
	CAPT3131*4A*	A*VC80604B*B*	23,000	17,000	14.00	11.50	830	6688014
	CAPT3131*4A*	G*E80603B*B*	23,000	17,000	14.00	11.50	800	6688021
	CAPT3131*4A*	A*VC950714CXB*	23,000	17,000	14.00	11.50	800	6688017
	CAPT3131*4A*	A*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366947
	CAPT3131*4A*	G*VC950714CXB*	23,000	17,000	14.00	11.50	800	6688025
	CAPT3131*4A*	G*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359205
	CAPT3131*4A*	G*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359207
	CAPT3131*4A*	G*VM960604CXB*	23,000	17,000	14.00	11.50	800	6688027
	CAPT3131*4A*	A*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359202
	CAPT3131*4A*+EEP		22,800	16,900	13.00	11.00	800	6688030
	CAPT3131*4A*+MBVC1200**-1A*		22,800	16,900	14.00	11.50	800	6688031
	CAPT3743*4A*	G*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359213
	CAPT3743*4A*	G*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359214
	CAPT3743*4A*	A*VC960804CNA*	23,600	17,500	14.00	11.50	800	7359211
	CAPT3743*4A*	A*VM970804CNA*	23,600	17,500	14.00	11.50	800	7359212
	CHPF1824A6C*+EEP		23,000	17,000	13.00	11.00	800	6688032
	CHPF2430B6C*	A*EH800603B*A*	23,000	17,000	14.00	11.50	860	6946157
	CHPF2430B6C*	G*VM960603BxB*	23,400	17,300	14.00	11.50	800	6688037
	CHPF2430B6C*	G*E80603B*B*	23,000	17,000	14.00	11.50	860	6688035
	CHPF2430B6C*	GME950403BXA*	23,400	17,300	14.00	11.60	800	6688038
	CHPF2430B6C*	G*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366842
	CHPF2430B6C*	A*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359219
	CHPF2430B6C*	G*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359220
	CHPF2430B6C*	G*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359221
	CHPF2430B6C*	G*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366837
	CHPF2430B6C*	AMEH960403BXA*	23,400	17,300	14.00	11.60	800	6946158
	CHPF2430B6C*	G*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366847
	CHPF2430B6C*	A*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359218

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241A* (cont.)	CHPF2430B6C*	G*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359223
	CHPF2430B6C*	A*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359215
	CHPF2430B6C*	G*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359222
	CHPF2430B6C*	G*VC950453BXB*	23,400	17,300	14.00	11.50	800	6688036
	CHPF2430B6C*	A*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359216
	CHPF2430B6C*	A*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359217
	CHPF2430B6C*	A*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366943
	CHPF2430B6C*	G*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359224
	CHPF2430B6C*	A*VM960603BXB*	23,400	17,300	14.00	11.60	800	6688034
	CHPF2430B6C*	G*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366832
	CHPF2430B6C*	A*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366948
	CHPF2430B6C*	A*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366953
	CHPF2430B6C*	A*VC950453BXB*	23,400	17,300	14.00	11.60	800	6688033
	CHPF2430B6C*	A*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366938
	CHPF2430B6C*+EEP		23,000	17,000	13.00	11.00	800	6688039
	CHPF2430B6C*+MBVC1200**-1A*		23,400	17,300	14.00	11.50	800	6688040
	CHPF2430B6C*+TXV	G*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366833
	CHPF2430B6C*+TXV	G*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359234
	CHPF2430B6C*+TXV	A*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359226
	CHPF2430B6C*+TXV	G*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359231
	CHPF2430B6C*+TXV	A*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359227
	CHPF2430B6C*+TXV	G*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359233
	CHPF2430B6C*+TXV	G*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359230
	CHPF2430B6C*+TXV	A*EC960302BNA*	23,000	17,000	14.00	11.50	800	7366939
	CHPF2430B6C*+TXV	G*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366838
	CHPF2430B6C*+TXV	A*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366954
	CHPF2430B6C*+TXV	G*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359232
	CHPF2430B6C*+TXV	G*EC960803BNA*	23,000	17,000	14.00	11.50	775	7366848
	CHPF2430B6C*+TXV	G*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366843
	CHPF2430B6C*+TXV	A*EC960603BNA*	23,000	17,000	14.00	11.50	775	7366949
	CHPF2430B6C*+TXV	A*EC960402BNA*	23,000	17,000	14.00	11.50	775	7366944
	CHPF2430B6C*+TXV	A*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359228
	CHPF2430B6C*+TXV	A*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359229
	CHPF2430B6C*+TXV	A*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359225
	CHPF3636B6C*	G*VC960803BNA*	23,400	17,300	14.00	11.50	810	7359242
	CHPF3636B6C*	A*VM970803BNA*	23,400	17,300	14.00	11.50	810	7359239
	CHPF3636B6C*	A*VC960803BNA*	23,400	17,300	14.00	11.50	810	7359237
	CHPF3636B6C*	G*VC960603BNA*	23,400	17,300	14.00	11.50	815	7359241
	CHPF3636B6C*	A*VC960403BNA*	23,400	17,300	14.00	11.50	805	7359235
	CHPF3636B6C*	A*VC960603BNA*	23,400	17,300	14.00	11.50	815	7359236
	CHPF3636B6C*	A*VM970603BNA*	23,400	17,300	14.00	11.50	815	7359238
	CHPF3636B6C*	G*VC960403BNA*	23,400	17,300	14.00	11.50	805	7359240
	CHPF3636B6C*	G*VM970803BNA*	23,400	17,300	14.00	11.50	810	7359244
	CHPF3636B6C*	G*VM970603BNA*	23,400	17,300	14.00	11.50	815	7359243
	CHPF3636B6C*+TXV	G*VC960403BNA*	23,400	17,300	14.00	11.50	805	7359250
	CHPF3636B6C*+TXV	G*VM970603BNA*	23,400	17,300	14.00	11.50	815	7359253
	CHPF3636B6C*+TXV	A*VM970803BNA*	23,400	17,300	14.00	11.50	810	7359249
	CHPF3636B6C*+TXV	G*VC960603BNA*	23,400	17,300	14.00	11.50	815	7359251
	CHPF3636B6C*+TXV	G*VC960803BNA*	23,400	17,300	14.00	11.50	810	7359252
	CHPF3636B6C*+TXV	A*VC960603BNA*	23,400	17,300	14.00	11.50	815	7359246
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,400	17,300	14.00	11.50	805	7359245
	CHPF3636B6C*+TXV	G*VM970803BNA*	23,400	17,300	14.00	11.50	810	7359254
	CHPF3636B6C*+TXV	A*VM970603BNA*	23,400	17,300	14.00	11.50	815	7359248
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,400	17,300	14.00	11.50	810	7359247
	CHPF3642C6C*	A*VC960804CNA*	23,400	17,300	14.00	11.50	800	7359255
	CHPF3642C6C*	A*VM970804CNA*	23,400	17,300	14.00	11.50	800	7359256
	CHPF3642C6C*	G*VM970804CNA*	23,400	17,300	14.00	11.50	800	7359258
	CHPF3642C6C*	G*VC960804CNA*	23,400	17,300	14.00	11.50	800	7359257
	CHPF3642C6C*+TXV	A*VC960804CNA*	23,400	17,300	14.00	11.50	800	7359259
	CHPF3642C6C*+TXV	G*VC960804CNA*	23,400	17,300	14.00	11.50	800	7359261

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241A* (cont.)	CHPF3642C6C*+TXV	G*VM970804CNA*	23,400	17,300	14.00	11.50	800	7359262
	CHPF3642C6C*+TXV	A*VM970804CNA*	23,400	17,300	14.00	11.50	800	7359260
	CSCF1824N6D*	G*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359275
	CSCF1824N6D*	A*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359263
	CSCF1824N6D*	A*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359268
	CSCF1824N6D*	A*VC950453BxB*	23,000	17,000	14.00	11.60	800	6688041
	CSCF1824N6D*	G*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359270
	CSCF1824N6D*	A*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359264
	CSCF1824N6D*	G*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359276
	CSCF1824N6D*	A*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359265
	CSCF1824N6D*	G*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359271
	CSCF1824N6D*	A*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359266
	CSCF1824N6D*	G*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359272
	CSCF1824N6D*	A*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359267
	CSCF1824N6D*	G*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359274
	CSCF1824N6D*	A*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359269
	CSCF1824N6D*	G*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359273
	CSCF1824N6D*+EEP		23,000	17,000	13.00	11.00	800	6688042
	CSCF1824N6D*+TXV	G*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359287
	CSCF1824N6D*+TXV	G*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359288
	CSCF1824N6D*+TXV	G*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359285
	CSCF1824N6D*+TXV	A*VM970603BNA*	23,000	17,000	14.00	11.50	815	7359281
	CSCF1824N6D*+TXV	G*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359284
	CSCF1824N6D*+TXV	G*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359290
	CSCF1824N6D*+TXV	A*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359279
	CSCF1824N6D*+TXV	A*VC960804CNA*	23,000	17,000	14.00	11.50	800	7359280
	CSCF1824N6D*+TXV	A*VM970804CNA*	23,000	17,000	14.00	11.50	800	7359283
	CSCF1824N6D*+TXV	A*VC960403BNA*	23,000	17,000	14.00	11.50	805	7359277
	CSCF1824N6D*+TXV	G*VC960803BNA*	23,000	17,000	14.00	11.50	810	7359286
	CSCF1824N6D*+TXV	G*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359289
	CSCF1824N6D*+TXV	A*VC960603BNA*	23,000	17,000	14.00	11.50	815	7359278
	CSCF1824N6D*+TXV	A*VM970803BNA*	23,000	17,000	14.00	11.50	810	7359282
	CSCF3036N6D*	A*VC960804CNA*	23,200	17,200	14.00	11.50	800	7359294
	CSCF3036N6D*	G*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359302
	CSCF3036N6D*	G*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359299
	CSCF3036N6D*	A*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359292
	CSCF3036N6D*	A*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359293
	CSCF3036N6D*	A*VM970804CNA*	23,200	17,200	14.00	11.50	800	7359297
	CSCF3036N6D*	A*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359295
	CSCF3036N6D*	A*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359296
	CSCF3036N6D*	G*VC960804CNA*	23,200	17,200	14.00	11.50	800	7359301
	CSCF3036N6D*	G*VM970804CNA*	23,200	17,200	14.00	11.50	800	7359304
	CSCF3036N6D*	G*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359300
	CSCF3036N6D*	G*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359298
	CSCF3036N6D*	A*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359291
	CSCF3036N6D*	G*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359303
	CSCF3036N6D*+TXV	A*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359307
	CSCF3036N6D*+TXV	A*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359305
	CSCF3036N6D*+TXV	G*VC960803BNA*	23,200	17,200	14.00	11.50	810	7359314
	CSCF3036N6D*+TXV	A*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359310
	CSCF3036N6D*+TXV	A*VM970804CNA*	23,200	17,200	14.00	11.50	800	7359311
	CSCF3036N6D*+TXV	A*VC960804CNA*	23,200	17,200	14.00	11.50	800	7359308
	CSCF3036N6D*+TXV	G*VC960403BNA*	23,200	17,200	14.00	11.50	805	7359312
	CSCF3036N6D*+TXV	A*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359306
	CSCF3036N6D*+TXV	G*VC960804CNA*	23,200	17,200	14.00	11.50	800	7359315
	CSCF3036N6D*+TXV	G*VM970804CNA*	23,200	17,200	14.00	11.50	800	7359318
	CSCF3036N6D*+TXV	A*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359309
	CSCF3036N6D*+TXV	G*VM970603BNA*	23,200	17,200	14.00	11.50	815	7359316
	CSCF3036N6D*+TXV	G*VM970803BNA*	23,200	17,200	14.00	11.50	810	7359317
	CSCF3036N6D*+TXV	G*VC960603BNA*	23,200	17,200	14.00	11.50	815	7359313

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A*	ACNF30XX16D*		27,600	20,800	13.00	11.00	890	6688043
	ARPT30B14A*		27,000	20,400	13.00	11.00	900	6688044
	ARUF30B14A*		27,000	20,400	13.00	11.00	900	6688045
	ARUF30B14A*+TXV		27,000	20,400	13.00	11.00	900	6688046
	ARUF36C14B*		27,200	20,600	13.00	11.00	1,000	6688047
	ARUF36C14B*+TXV		27,200	20,600	13.50	11.50	1,000	6688048
	ASPT36C14A*		28,000	21,200	14.00	12.00	1,010	6688049
	ASUF29B14A*		26,000	19,600	13.30	11.30	975	6688050
	ASUF39C14A*		28,000	21,200	13.50	11.50	1,005	6688051
	ASUF39C14A*+TXV		28,000	21,200	14.00	12.00	1,005	6688052
	AVPTC36C14A*		28,000	21,200	14.00	12.00	1,015	6688053
	AWUF30XX16B*		27,600	20,800	13.00	11.00	1,000	6688054
	AWUF36XX16B*		27,800	21,000	13.00	11.00	1,000	6688055
	AWUF37XX16B*		28,000	21,200	13.00	11.00	1,000	6688056
	CA*F3030*6D*	AMEH960603BXA*	28,200	21,200	13.50	11.30	1,000	6946160
	CA*F3030*6D*	G*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366872
	CA*F3030*6D*	G*VC950714CXB*	28,400	21,400	14.00	11.50	1,000	6688067
	CA*F3030*6D*	G*VC80604B*B*	28,200	21,200	13.50	11.30	1,050	6688064
	CA*F3030*6D*	G*VC950704CXB*	28,400	21,400	14.00	11.50	1,000	6688066
	CA*F3030*6D*	A*VC950714CXB*	28,400	21,400	14.00	11.50	1,000	6688060
	CA*F3030*6D*	G*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6688069
	CA*F3030*6D*	G*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359332
	CA*F3030*6D*	A*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6688058
	CA*F3030*6D*	GME950403BXA*	28,400	21,400	14.00	11.50	1,000	6688070
	CA*F3030*6D*	G*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359327
	CA*F3030*6D*	A*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6688062
	CA*F3030*6D*	A*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359323
	CA*F3030*6D*	A*VC80604B*B*	28,200	21,200	13.50	11.30	1,050	6688057
	CA*F3030*6D*	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359326
	CA*F3030*6D*	A*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359325
	CA*F3030*6D*	A*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366978
	CA*F3030*6D*	A*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359322
	CA*F3030*6D*	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359331
	CA*F3030*6D*	AMEH960403BXA*	28,400	21,400	14.00	11.50	1,000	6946159
	CA*F3030*6D*	G*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359330
	CA*F3030*6D*	A*EC960402BNA*	28,400	21,400	13.50	11.50	1,000	7366962
	CA*F3030*6D*	G*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6688065
	CA*F3030*6D*	G*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6688068
	CA*F3030*6D*	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359324
	CA*F3030*6D*	G*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366864
	CA*F3030*6D*	A*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6688061
	CA*F3030*6D*	A*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359320
	CA*F3030*6D*	A*VC950704CXB*	28,400	21,400	14.00	11.50	1,000	6688059
	CA*F3030*6D*	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359321
	CA*F3030*6D*	ADVC80603B*B*	28,000	21,200	13.50	11.30	1,050	6688063
	CA*F3030*6D*	GME950603BXA*	28,200	21,200	13.50	11.30	1,000	6688071
	CA*F3030*6D*	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359328
	CA*F3030*6D*	A*EC960302BNA*	28,000	21,200	13.50	11.50	1,000	7366955
	CA*F3030*6D*	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359319
	CA*F3030*6D*	G*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359329
	CA*F3030*6D*	G*EC960402BNA*	28,400	21,400	13.50	11.50	1,000	7366856
	CA*F3030*6D*	G*EC960302BNA*	28,000	21,200	13.50	11.50	1,000	7366849
	CA*F3030*6D*	A*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366970
	CA*F3030*6D*+EEP		28,400	21,400	13.00	11.00	1,050	6688072
	CA*F3030*6D*+TXV	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359335
	CA*F3030*6D*+TXV	A*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366971
	CA*F3030*6D*+TXV	G*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359346
	CA*F3030*6D*+TXV	G*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366865
	CA*F3030*6D*+TXV	G*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366857

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A* (cont.)	CA*F3030*6D*+TXV	A*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359337
	CA*F3030*6D*+TXV	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359345
	CA*F3030*6D*+TXV	G*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366873
	CA*F3030*6D*+TXV	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359340
	CA*F3030*6D*+TXV	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359342
	CA*F3030*6D*+TXV	A*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359336
	CA*F3030*6D*+TXV	A*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359339
	CA*F3030*6D*+TXV	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359338
	CA*F3030*6D*+TXV	G*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359343
	CA*F3030*6D*+TXV	A*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366979
	CA*F3030*6D*+TXV	A*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366963
	CA*F3030*6D*+TXV	G*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366850
	CA*F3030*6D*+TXV	A*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366956
	CA*F3030*6D*+TXV	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359333
	CA*F3030*6D*+TXV	A*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359334
	CA*F3030*6D*+TXV	G*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359341
	CA*F3030*6D*+TXV	G*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359344
	CA*F3131*6D*	G*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366874
	CA*F3131*6D*	A*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366964
	CA*F3131*6D*	GME950603BXA*	28,400	21,400	13.50	11.30	1,000	6688087
	CA*F3131*6D*	A*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366980
	CA*F3131*6D*	A*VM960603BxB*	28,600	21,600	14.00	11.50	1,000	6688077
	CA*F3131*6D*	A*VM960604CXB*	28,600	21,600	14.00	11.50	1,050	6688078
	CA*F3131*6D*	G*VM960604CXB*	28,600	21,600	14.00	11.50	1,050	6688085
	CA*F3131*6D*	G*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366866
	CA*F3131*6D*	A*VC950704CXB*	28,400	21,400	14.00	11.50	900	6688075
	CA*F3131*6D*	A*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366972
	CA*F3131*6D*	AMEH960603BXA*	28,400	21,400	13.50	11.30	1,000	6946162
	CA*F3131*6D*	AMEH960403BXA*	28,600	21,600	14.00	11.50	1,000	6946161
	CA*F3131*6D*	G*VC950453BxB*	28,600	21,600	14.00	11.50	1,000	6688081
	CA*F3131*6D*	A*VC950714CXB*	28,600	21,600	14.00	11.50	1,050	6688076
	CA*F3131*6D*	A*EC960302BNA*	28,600	21,600	14.00	11.50	1,000	7366957
	CA*F3131*6D*	GME950403BXA*	28,600	21,600	14.00	11.50	1,000	6688086
	CA*F3131*6D*	A*VC950453BxB*	28,600	21,600	14.00	11.50	1,000	6688074
	CA*F3131*6D*	G*VC950704CXB*	28,400	21,400	14.00	11.50	900	6688082
	CA*F3131*6D*	G*VC950714CXB*	28,600	21,600	14.00	11.50	1,050	6688083
	CA*F3131*6D*	G*VC80604B*B*	28,200	21,200	13.50	11.50	1,050	6688080
	CA*F3131*6D*	A*VC80604B*B*	28,200	21,200	13.50	11.50	1,050	6688073
	CA*F3131*6D*	G*VM960603BxB*	28,600	21,600	14.00	11.50	1,000	6688084
	CA*F3131*6D*	ADV80603B*B*	28,000	21,200	13.50	11.50	1,050	6688079
	CA*F3131*6D*	G*EC960302BNA*	28,600	21,600	14.00	11.50	1,000	7366851
	CA*F3131*6D*	G*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366858
	CA*F3131*6D*+EEP		28,600	21,600	13.00	11.00	1,050	6688088
	CA*F3131*6D*+MBVC1200**.-1A*		28,400	21,400	14.00	11.50	950	6688089
	CA*F3131*6D*+TXV	A*EC960302BNA*	28,600	21,600	14.00	11.50	1,000	7366958
	CA*F3131*6D*+TXV	A*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366981
	CA*F3131*6D*+TXV	G*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366859
	CA*F3131*6D*+TXV	A*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366973
	CA*F3131*6D*+TXV	G*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366867
	CA*F3131*6D*+TXV	G*EC960302BNA*	28,600	21,600	14.00	11.50	1,000	7366852
	CA*F3131*6D*+TXV	G*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366875
	CA*F3131*6D*+TXV	A*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366965
	CA*F3137*6A*	A*EC960402BNA*	28,000	21,200	13.50	11.50	935	7489542
	CA*F3137*6A*	A*EC960603BNA*	28,400	21,400	14.00	11.50	1,020	7489543
	CA*F3137*6A*	A*EC960803BNA*	28,400	21,400	13.50	11.50	1,010	7489544
	CA*F3137*6A*	A*VC80604B*B*	28,400	21,400	14.00	11.50	990	7489545
	CA*F3137*6A*	A*VC960403BNA*	28,400	21,400	14.00	11.50	985	7489546
	CA*F3137*6A*	A*VC960603BNA*	28,400	21,400	14.00	11.50	985	7489547
	CA*F3137*6A*	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,025	7489548

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A* (cont.)	CA*F3137*6A*	A*VM970603BNA*	28,400	21,400	14.00	11.50	985	7489549
	CA*F3137*6A*	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,025	7489550
	CA*F3137*6A*	ADVC80603B*B*	28,000	21,200	13.50	11.50	900	7489551
	CA*F3137*6A*	G*EC960402BNA*	28,000	21,200	13.50	11.50	935	7489552
	CA*F3137*6A*	G*EC960603BNA*	28,400	21,400	14.00	11.50	1,020	7489553
	CA*F3137*6A*	G*EC960803BNA*	28,400	21,400	13.50	11.50	1,010	7489554
	CA*F3137*6A*	G*VC80604B*B*	28,400	21,400	14.00	11.50	990	7489555
	CA*F3137*6A*	G*VC960403BNA*	28,400	21,400	14.00	11.50	985	7489556
	CA*F3137*6A*	G*VC960603BNA*	28,400	21,400	14.00	11.50	985	7489557
	CA*F3137*6A*	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,025	7489558
	CA*F3137*6A*	G*VM970603BNA*	28,400	21,400	14.00	11.50	985	7489559
	CA*F3137*6A*	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,025	7489560
	CA*F3137*6A*+EEP		28,400	21,400	13.00	11.00	1,000	7489519
	CA*F3137*6A*+EEP+TXV		28,400	21,400	13.50	11.00	1,000	7489520
	CA*F3137*6A*+MBVC1200**-1A*		28,400	21,400	14.00	11.50	1,025	7489521
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,400	21,400	14.00	11.50	1,025	7489522
	CA*F3137*6A*+TXV	A*EC960402BNA*	28,000	21,200	14.00	11.50	935	7489523
	CA*F3137*6A*+TXV	A*EC960603BNA*	28,400	21,400	14.00	11.50	1,020	7489524
	CA*F3137*6A*+TXV	A*EC960803BNA*	28,400	21,400	13.50	11.50	1,010	7489525
	CA*F3137*6A*+TXV	A*VC80604B*B*	28,400	21,400	14.00	11.50	990	7489526
	CA*F3137*6A*+TXV	A*VC960403BNA*	28,400	21,400	14.00	11.50	985	7489527
	CA*F3137*6A*+TXV	A*VC960603BNA*	28,400	21,400	14.00	11.50	985	7489528
	CA*F3137*6A*+TXV	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,025	7489529
	CA*F3137*6A*+TXV	A*VM970603BNA*	28,400	21,400	14.00	11.50	985	7489530
	CA*F3137*6A*+TXV	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,025	7489531
	CA*F3137*6A*+TXV	ADVC80603B*B*	28,000	21,200	14.00	11.50	900	7489532
	CA*F3137*6A*+TXV	G*EC960402BNA*	28,000	21,200	14.00	11.50	935	7489533
	CA*F3137*6A*+TXV	G*EC960603BNA*	28,400	21,400	14.00	11.50	1,020	7489534
	CA*F3137*6A*+TXV	G*EC960803BNA*	28,400	21,400	13.50	11.50	1,010	7489535
	CA*F3137*6A*+TXV	G*VC80604B*B*	28,400	21,400	14.00	11.50	990	7489536
	CA*F3137*6A*+TXV	G*VC960403BNA*	28,400	21,400	14.00	11.50	985	7489537
	CA*F3137*6A*+TXV	G*VC960603BNA*	28,400	21,400	14.00	11.50	985	7489538
	CA*F3137*6A*+TXV	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,025	7489539
	CA*F3137*6A*+TXV	G*VM970603BNA*	28,400	21,400	14.00	11.50	985	7489540
	CA*F3137*6A*+TXV	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,025	7489541
	CA*F3636*6D*+EEP		28,400	21,400	13.00	11.00	1,000	6688090
	CA*F3636*6D*+EEP+TXV		28,400	21,400	13.00	11.00	1,000	6688091
	CA*F3642*6D*+EEP		28,400	21,400	13.00	11.00	1,000	6688092
	CA*F3642*6D*+EEP+TXV		28,400	21,400	13.00	11.00	1,000	6688093
	CA*F3743*6D*	A*VM970804CNA*	28,600	21,600	14.00	11.50	1,000	7359348
	CA*F3743*6D*	A*VC960804CNA*	28,600	21,600	14.00	11.50	1,000	7359347
	CA*F3743*6D*	G*VC960804CNA*	28,600	21,600	14.00	11.50	1,000	7359349
	CA*F3743*6D*	G*VM970804CNA*	28,600	21,600	14.00	11.50	1,000	7359350
	CA*F3743*6D*+EEP		28,400	21,400	13.50	11.00	1,000	6688094
	CA*F3743*6D*+EEP+TXV		28,400	21,400	13.50	11.00	1,000	6688095
	CA*F3743*6D*+TXV	G*EC960803BNA*	28,600	21,600	14.00	11.50	1,000	7366876
	CA*F3743*6D*+TXV	G*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366861
	CA*F3743*6D*+TXV	G*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359353
	CA*F3743*6D*+TXV	A*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359352
	CA*F3743*6D*+TXV	A*EC960402BNA*	28,600	21,600	14.00	11.50	1,000	7366967
	CA*F3743*6D*+TXV	G*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359354
	CA*F3743*6D*+TXV	G*EC960603BNA*	28,800	21,800	14.00	11.50	1,000	7366868
	CA*F3743*6D*+TXV	A*EC960603BNA*	28,800	21,800	14.00	11.50	1,000	7366974
	CA*F3743*6D*+TXV	A*EC960803BNA*	28,600	21,600	14.00	11.50	1,000	7366982
	CA*F3743*6D*+TXV	A*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359351
	CAPT3131*4A*	G*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359363
	CAPT3131*4A*	A*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359359
	CAPT3131*4A*	G*VC960403BNA*	28,000	21,200	13.50	11.50	1,000	7359362
	CAPT3131*4A*	G*VM970804CNA*	28,000	21,200	13.50	11.50	1,000	7359368

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A* (cont.)	CAPT3131*4A*	A*VC960403BNA*	28,000	21,200	13.50	11.50	1,000	7359355
	CAPT3131*4A*	G*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359366
	CAPT3131*4A*	A*VM970803BNA*	28,000	21,200	13.50	11.50	1,030	7359360
	CAPT3131*4A*	G*VM970803BNA*	28,000	21,200	13.50	11.50	1,030	7359367
	CAPT3131*4A*	A*VC960804CNA*	28,000	21,200	13.50	11.50	1,000	7359358
	CAPT3131*4A*	A*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359356
	CAPT3131*4A*	G*VC960803BNA*	28,000	21,200	13.50	11.50	1,030	7359364
	CAPT3131*4A*	A*VC960803BNA*	28,000	21,200	13.50	11.50	1,030	7359357
	CAPT3131*4A*	G*VC960804CNA*	28,000	21,200	13.50	11.50	1,000	7359365
	CAPT3131*4A*	A*VM970804CNA*	28,000	21,200	13.50	11.50	1,000	7359361
	CAPT3743*4A*	G*VC80805C*B*	28,200	21,200	14.00	12.00	980	6688117
	CAPT3743*4A*	GME950403BXA*	28,200	21,200	13.50	11.50	1,000	6688132
	CAPT3743*4A*	G*VM970603BNA*	28,200	21,200	13.50	11.50	1,000	7359380
	CAPT3743*4A*	G*E80603B*B*	28,200	21,200	13.50	11.50	1,050	6688115
	CAPT3743*4A*	G*VC951155DXB*	28,200	21,200	14.00	12.00	1,005	6688125
	CAPT3743*4A*	A*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366959
	CAPT3743*4A*	AMEH960603BXA*	28,200	21,200	13.50	11.50	1,000	6946165
	CAPT3743*4A*	G*VM960805DXB*	28,200	21,200	14.00	12.00	1,000	6688129
	CAPT3743*4A*	A*VC950905DXB*	28,200	21,200	14.00	12.00	985	6688103
	CAPT3743*4A*	A*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359372
	CAPT3743*4A*	A*VM960805DXB*	28,200	21,200	14.00	12.00	1,000	6688109
	CAPT3743*4A*	A*VC80805C*B*	28,200	21,200	14.00	12.00	980	6688097
	CAPT3743*4A*	A*VM960603BXB*	28,200	21,200	13.50	11.50	1,010	6688106
	CAPT3743*4A*	A*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359375
	CAPT3743*4A*	A*VC80604B*B*	28,200	21,200	14.00	12.00	1,000	6688096
	CAPT3743*4A*	A*VM960604CXB*	28,200	21,200	13.50	11.50	1,040	6688107
	CAPT3743*4A*	G*VC960803BNA*	28,200	21,200	14.00	11.50	1,030	7359378
	CAPT3743*4A*	G*VM960604CXB*	28,200	21,200	13.50	11.50	1,040	6688127
	CAPT3743*4A*	A*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366975
	CAPT3743*4A*	G*VM960805CXB*	28,200	21,200	14.00	12.00	985	6688128
	CAPT3743*4A*	G*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359379
	CAPT3743*4A*	G*VC960403BNA*	28,200	21,200	14.00	11.50	1,000	7359376
	CAPT3743*4A*	A*VM961155DXB*	28,200	21,200	14.00	12.00	1,000	6688111
	CAPT3743*4A*	G*VC950714CXB*	28,200	21,200	13.50	11.50	1,050	6688121
	CAPT3743*4A*	G*EC960603BNA*	28,600	21,600	13.50	11.50	1,000	7366869
	CAPT3743*4A*	A*VC960803BNA*	28,200	21,200	14.00	11.50	1,030	7359371
	CAPT3743*4A*	A*VC950714CXB*	28,200	21,200	13.50	11.50	1,050	6688101
	CAPT3743*4A*	ADV80805C*B*	28,000	21,200	14.00	12.00	990	6688113
	CAPT3743*4A*	A*VC950905CXB*	28,200	21,200	14.00	12.00	985	6688102
	CAPT3743*4A*	A*VM970803BNA*	28,200	21,200	14.00	11.50	1,030	7359374
	CAPT3743*4A*	G*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366853
	CAPT3743*4A*	G*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366860
	CAPT3743*4A*	G*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359382
	CAPT3743*4A*	AMEH960403BXA*	28,200	21,200	13.50	11.50	1,000	6946164
	CAPT3743*4A*	A*EH800603B*A*	28,200	21,200	13.50	11.50	1,050	6946163
	CAPT3743*4A*	A*VC951155DXB*	28,200	21,200	14.00	12.00	1,005	6688105
	CAPT3743*4A*	A*VC950915DXB*	28,200	21,200	14.00	12.00	1,005	6688104
	CAPT3743*4A*	A*VC960403BNA*	28,200	21,200	14.00	11.50	1,000	7359369
	CAPT3743*4A*	A*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366983
	CAPT3743*4A*	A*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366966
	CAPT3743*4A*	G*VM960603BXB*	28,200	21,200	13.50	11.50	1,010	6688126
	CAPT3743*4A*	G*VM961005DXB*	28,200	21,200	14.00	12.00	980	6688130
	CAPT3743*4A*	A*VM961005DXB*	28,200	21,200	14.00	12.00	980	6688110
	CAPT3743*4A*	G*VC950905CXB*	28,200	21,200	14.00	12.00	985	6688122
	CAPT3743*4A*	GME950603BXA*	28,200	21,200	13.50	11.50	1,000	6688133
	CAPT3743*4A*	G*VC81005C*B*	28,200	21,200	14.00	12.00	1,000	6688118
	CAPT3743*4A*	G*VC950704CXB*	28,200	21,200	13.50	11.50	1,020	6688120
	CAPT3743*4A*	G*VC950915DXB*	28,200	21,200	14.00	12.00	1,005	6688124
	CAPT3743*4A*	G*VC80604B*B*	28,200	21,200	14.00	12.00	1,000	6688116

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A* (cont.)	CAPT3743*4A*	A*VC960603BNA*	28,200	21,200	13.50	11.50	1,000	7359370
	CAPT3743*4A*	G*VC960603BNA*	28,200	21,200	13.50	11.50	1,000	7359377
	CAPT3743*4A*	ADV81005C*B*	28,000	21,200	14.00	12.00	1,010	6688114
	CAPT3743*4A*	A*VC950704CXB*	28,200	21,200	13.50	11.50	1,020	6688100
	CAPT3743*4A*	G*VC950905DXB*	28,200	21,200	14.00	12.00	985	6688123
	CAPT3743*4A*	G*EC960803BNA*	28,600	21,600	13.50	11.50	1,000	7366877
	CAPT3743*4A*	A*VC950453BXB*	28,200	21,200	13.50	11.50	1,000	6688099
	CAPT3743*4A*	G*VM961155DXB*	28,200	21,200	14.00	12.00	1,000	6688131
	CAPT3743*4A*	G*VM970803BNA*	28,200	21,200	14.00	11.50	1,030	7359381
	CAPT3743*4A*	G*VC950453BXB*	28,200	21,200	13.50	11.50	1,000	6688119
	CAPT3743*4A*	ADV80603B*B*	28,000	21,200	13.50	11.50	1,000	6688112
	CAPT3743*4A*	A*VC81005C*B*	28,200	21,200	14.00	12.00	1,000	6688098
	CAPT3743*4A*	A*VM960805CXB*	28,200	21,200	14.00	12.00	985	6688108
	CAPT3743*4A*	A*VM970603BNA*	28,200	21,200	13.50	11.50	1,000	7359373
	CAPT3743*4A*+EEP		28,200	21,200	13.00	11.00	1,000	6688134
	CAPT3743*4A*+MBVC1200**-1A*		28,000	21,200	14.00	11.50	900	6691294
	CAPT3743*4A*+MBVC1600**-1A*		28,200	21,200	14.00	11.50	1,000	6688135
	CHPF2430B6C*	A*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366960
	CHPF2430B6C*	A*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359386
	CHPF2430B6C*	G*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359391
	CHPF2430B6C*	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359385
	CHPF2430B6C*	G*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366854
	CHPF2430B6C*	G*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6688141
	CHPF2430B6C*	A*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6688136
	CHPF2430B6C*	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359383
	CHPF2430B6C*	A*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359384
	CHPF2430B6C*	AMEH960403BXA*	28,400	21,400	14.00	11.50	1,000	6946166
	CHPF2430B6C*	G*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359389
	CHPF2430B6C*	G*VC950453BXB*	28,400	21,400	14.00	11.50	1,000	6688139
	CHPF2430B6C*	A*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366968
	CHPF2430B6C*	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359392
	CHPF2430B6C*	GME950403BXA*	28,400	21,400	14.00	11.50	1,000	6688142
	CHPF2430B6C*	A*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6688137
	CHPF2430B6C*	G*VM960603BXB*	28,400	21,400	14.00	11.50	1,000	6688140
	CHPF2430B6C*	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359388
	CHPF2430B6C*	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359387
	CHPF2430B6C*	G*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366862
	CHPF2430B6C*	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359390
	CHPF2430B6C*	A*VM960604CXB*	28,400	21,400	14.00	11.50	1,000	6688138
	CHPF2430B6C*+EEP		28,400	21,400	13.00	11.00	1,050	6688143
	CHPF2430B6C*+MBVC1200**-1A*		28,400	21,400	14.00	11.50	1,050	6688144
	CHPF2430B6C*+TXV	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359397
	CHPF2430B6C*+TXV	A*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359396
	CHPF2430B6C*+TXV	A*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359394
	CHPF2430B6C*+TXV	G*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366863
	CHPF2430B6C*+TXV	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359402
	CHPF2430B6C*+TXV	A*EC960402BNA*	28,400	21,400	14.00	11.50	1,000	7366969
	CHPF2430B6C*+TXV	A*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366961
	CHPF2430B6C*+TXV	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359398
	CHPF2430B6C*+TXV	G*VC960603BNA*	28,400	21,400	14.00	11.50	1,000	7359399
	CHPF2430B6C*+TXV	G*EC960302BNA*	28,400	21,400	14.00	11.50	1,000	7366855
	CHPF2430B6C*+TXV	G*VM970603BNA*	28,400	21,400	14.00	11.50	1,000	7359401
	CHPF2430B6C*+TXV	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359393
	CHPF2430B6C*+TXV	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359400
	CHPF2430B6C*+TXV	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359395
	CHPF3636B6C*	G*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366878
	CHPF3636B6C*	A*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366976
	CHPF3636B6C*	G*EC960603BNA*	28,400	21,400	13.50	11.50	1,000	7366870
	CHPF3636B6C*	A*EC960803BNA*	28,400	21,400	13.50	11.50	1,000	7366984

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301A* (cont.)	CHPF3636B6C*+TXV	A*EC960603BNA*	28,400	21,400	14.00	11.50	1,000	7366977
	CHPF3636B6C*+TXV	A*EC960803BNA*	28,400	21,400	14.00	11.50	1,000	7366985
	CHPF3636B6C*+TXV	G*EC960603BNA*	28,400	21,400	14.00	11.50	1,000	7366871
	CHPF3636B6C*+TXV	G*EC960803BNA*	28,400	21,400	14.00	11.50	1,000	7366879
	CHPF3642C6C*	A*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359404
	CHPF3642C6C*	G*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359406
	CHPF3642C6C*	A*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359403
	CHPF3642C6C*	G*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359405
	CHPF3642C6C*+TXV	A*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359408
	CHPF3642C6C*+TXV	G*VM970804CNA*	28,400	21,400	14.00	11.50	1,000	7359410
	CHPF3642C6C*+TXV	G*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359409
	CHPF3642C6C*+TXV	A*VC960804CNA*	28,400	21,400	14.00	11.50	1,000	7359407
	CSCF3036N6D*	A*VM970603BNA*	28,400	21,400	14.00	11.30	1,000	7359415
	CSCF3036N6D*	G*VC960603BNA*	28,400	21,400	14.00	11.30	1,000	7359419
	CSCF3036N6D*	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359411
	CSCF3036N6D*	G*VM970603BNA*	28,400	21,400	14.00	11.30	1,000	7359422
	CSCF3036N6D*	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359423
	CSCF3036N6D*	A*VC950453BxB*	28,400	21,400	14.00	11.30	1,000	6688145
	CSCF3036N6D*	G*VC950453BxB*	28,400	21,400	14.00	11.30	1,000	6688146
	CSCF3036N6D*	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359418
	CSCF3036N6D*	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359413
	CSCF3036N6D*	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359416
	CSCF3036N6D*	A*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359417
	CSCF3036N6D*	G*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359424
	CSCF3036N6D*	A*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359414
	CSCF3036N6D*	A*VC960603BNA*	28,400	21,400	14.00	11.30	1,000	7359412
	CSCF3036N6D*	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359420
	CSCF3036N6D*	G*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359421
	CSCF3036N6D*+EEP		28,400	21,400	13.00	11.00	1,000	6688147
	CSCF3036N6D*+TXV	A*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359430
	CSCF3036N6D*+TXV	A*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359428
	CSCF3036N6D*+TXV	A*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359425
	CSCF3036N6D*+TXV	A*VC960603BNA*	28,400	21,400	14.00	11.30	1,000	7359426
	CSCF3036N6D*+TXV	G*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359434
	CSCF3036N6D*+TXV	A*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359431
	CSCF3036N6D*+TXV	G*VM970603BNA*	28,400	21,400	14.00	11.30	1,000	7359436
	CSCF3036N6D*+TXV	A*VC960803BNA*	28,400	21,400	14.00	11.50	1,030	7359427
	CSCF3036N6D*+TXV	G*VC960603BNA*	28,400	21,400	14.00	11.30	1,000	7359433
	CSCF3036N6D*+TXV	G*VM970804CNA*	28,200	21,200	14.00	11.50	1,000	7359438
	CSCF3036N6D*+TXV	G*VC960804CNA*	28,200	21,200	14.00	11.50	1,000	7359435
	CSCF3036N6D*+TXV	G*VM970803BNA*	28,400	21,400	14.00	11.50	1,030	7359437
	CSCF3036N6D*+TXV	A*VM970603BNA*	28,400	21,400	14.00	11.30	1,000	7359429
	CSCF3036N6D*+TXV	G*VC960403BNA*	28,400	21,400	14.00	11.50	1,000	7359432
ANX13 0361A*	ARPT36C14A*		33,000	25,800	13.00	11.00	1,150	6688148
	ARPT42D14A*		34,200	26,600	13.50	11.30	1,150	6688149
	ARUF36C14B*		33,000	25,800	13.00	11.00	1,000	6688150
	ARUF36C14B*+TXV		34,000	26,400	13.00	11.00	1,165	6688151
	ARUF42C14A*		34,200	26,600	13.00	11.00	1,150	6688152
	ARUF42C14A*+TXV		34,200	26,600	13.00	11.00	1,150	6688153
	ASPT36C14A*		34,000	26,400	13.80	11.80	1,210	6688154
	ASPT42C14A*		34,000	26,400	14.00	12.00	1,180	7080456
	ASPT42D14A*		34,600	27,000	14.00	12.00	1,280	6688155
	ASUF39C14A*		34,000	26,400	13.50	11.50	1,210	6688156
	ASUF39C14A*+TXV		34,000	26,400	13.80	11.80	1,210	6688157
	AVPTC36C14A*		34,000	26,400	13.80	11.80	1,215	6688158
	AVPTC42D14A*		34,600	27,000	14.00	12.00	1,225	6688159
	AVPTC48C14A*		34,000	26,400	14.00	12.00	1,100	7080457
	AWUF36XX16B*		33,400	26,000	13.00	11.00	1,150	6688160

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (cont.)	AWUF37XX16B*		33,600	26,200	13.00	11.00	1,150	6688161
	CA*F3137*6A*	A*EC960603BNA*	34,000	26,400	13.50	11.00	1,090	7489584
	CA*F3137*6A*	A*EC960803BNA*	34,000	26,400	13.50	11.00	1,090	7489585
	CA*F3137*6A*	A*EH800603B*A*	34,000	26,400	14.00	11.50	1,100	7489586
	CA*F3137*6A*	A*VC80604B*B*	34,000	26,400	14.00	11.50	1,095	7489587
	CA*F3137*6A*	A*VC960403BNA*	34,000	26,400	13.50	11.00	1,050	7489588
	CA*F3137*6A*	A*VC960603BNA*	34,000	26,400	13.50	11.00	1,055	7489589
	CA*F3137*6A*	A*VC960803BNA*	34,000	26,400	13.50	11.00	1,100	7489590
	CA*F3137*6A*	A*VM970603BNA*	34,000	26,400	13.50	11.00	1,055	7489591
	CA*F3137*6A*	A*VM970803BNA*	34,000	26,400	13.50	11.00	1,100	7489592
	CA*F3137*6A*	ADVC80603B*B*	34,000	26,400	13.50	11.00	1,075	7489593
	CA*F3137*6A*	G*E80603B*B*	34,000	26,400	14.00	11.50	1,100	7489594
	CA*F3137*6A*	G*EC960603BNA*	34,000	26,400	13.50	11.00	1,090	7489595
	CA*F3137*6A*	G*EC960803BNA*	34,000	26,400	13.50	11.00	1,090	7489596
	CA*F3137*6A*	G*VC80604B*B*	34,000	26,400	14.00	11.50	1,095	7489597
	CA*F3137*6A*	G*VC960403BNA*	34,000	26,400	13.50	11.00	1,050	7489598
	CA*F3137*6A*	G*VC960603BNA*	34,000	26,400	13.50	11.00	1,055	7489599
	CA*F3137*6A*	G*VC960803BNA*	34,000	26,400	13.50	11.00	1,100	7489600
	CA*F3137*6A*	G*VM970603BNA*	34,000	26,400	13.50	11.00	1,055	7489601
	CA*F3137*6A*	G*VM970803BNA*	34,000	26,400	13.50	11.00	1,100	7489602
	CA*F3137*6A*+EEP		34,000	26,400	13.00	11.00	1,200	7489561
	CA*F3137*6A*+EEP+TXV		34,000	26,400	13.50	11.00	1,200	7489562
	CA*F3137*6A*+MBVC1200** -1A*		34,000	26,400	14.00	11.50	1,050	7489563
	CA*F3137*6A*+MBVC1200** -1A*+TXV		34,000	26,400	14.00	11.50	1,050	7489564
	CA*F3137*6A*+TXV	A*EC960603BNA*	34,000	26,400	13.50	11.00	1,090	7489565
	CA*F3137*6A*+TXV	A*EC960803BNA*	34,000	26,400	13.50	11.00	1,090	7489566
	CA*F3137*6A*+TXV	A*EH800603B*A*	34,000	26,400	14.00	11.50	1,100	7489567
	CA*F3137*6A*+TXV	A*VC80604B*B*	34,000	26,400	14.00	11.50	1,095	7489568
	CA*F3137*6A*+TXV	A*VC960403BNA*	34,000	26,400	14.00	11.50	1,050	7489569
	CA*F3137*6A*+TXV	A*VC960603BNA*	34,000	26,400	14.00	11.50	1,055	7489570
	CA*F3137*6A*+TXV	A*VC960803BNA*	34,000	26,400	14.00	11.50	1,100	7489571
	CA*F3137*6A*+TXV	A*VM970603BNA*	34,000	26,400	14.00	11.50	1,055	7489572
	CA*F3137*6A*+TXV	A*VM970803BNA*	34,000	26,400	14.00	11.50	1,100	7489573
	CA*F3137*6A*+TXV	ADVC80603B*B*	34,000	26,400	14.00	11.50	1,075	7489574
	CA*F3137*6A*+TXV	G*E80603B*B*	34,000	26,400	14.00	11.50	1,100	7489575
	CA*F3137*6A*+TXV	G*EC960603BNA*	34,000	26,400	13.50	11.00	1,090	7489576
	CA*F3137*6A*+TXV	G*EC960803BNA*	34,000	26,400	13.50	11.00	1,090	7489577
	CA*F3137*6A*+TXV	G*VC80604B*B*	34,000	26,400	14.00	11.50	1,095	7489578
	CA*F3137*6A*+TXV	G*VC960403BNA*	34,000	26,400	14.00	11.50	1,050	7489579
	CA*F3137*6A*+TXV	G*VC960603BNA*	34,000	26,400	14.00	11.50	1,055	7489580
	CA*F3137*6A*+TXV	G*VC960803BNA*	34,000	26,400	14.00	11.50	1,100	7489581
	CA*F3137*6A*+TXV	G*VM970603BNA*	34,000	26,400	14.00	11.50	1,055	7489582
	CA*F3137*6A*+TXV	G*VM970803BNA*	34,000	26,400	14.00	11.50	1,100	7489583
	CA*F3636*6D*	G*VC950905CXB*	33,600	26,200	13.50	11.30	1,150	6688166
	CA*F3636*6D*	G*VM960604CXB*	33,600	26,200	13.50	11.30	1,155	6688170
	CA*F3636*6D*	G*VC950905DXB*	33,600	26,200	13.50	11.30	1,150	6688167
	CA*F3636*6D*	G*VM960805CXB*	33,600	26,200	13.50	11.30	1,150	6688171
	CA*F3636*6D*	A*VC950714CXB*	33,600	26,200	13.50	11.30	1,135	6688162
	CA*F3636*6D*	A*VC950915DXB*	33,600	26,200	13.50	11.30	1,220	6688163
	CA*F3636*6D*	G*VC950915DXB*	33,600	26,200	13.50	11.30	1,220	6688168
	CA*F3636*6D*	G*VM961155DXB*	33,600	26,200	13.50	11.30	1,205	6688174
	CA*F3636*6D*	A*VM960604CXB*	33,600	26,200	13.50	11.30	1,155	6688164
	CA*F3636*6D*	G*VC951155DXB*	33,600	26,200	13.50	11.30	1,205	6688169
	CA*F3636*6D*	G*VM960805DXB*	33,600	26,200	13.50	11.30	1,220	6688172
	CA*F3636*6D*	G*VM961005DXB*	33,600	26,200	13.50	11.30	1,205	6688173
	CA*F3636*6D*	G*VC950714CXB*	33,600	26,200	13.50	11.30	1,135	6688165
	CA*F3636*6D*+EEP		33,600	26,200	13.00	11.00	1,200	6688175
	CA*F3642*6D*	A*VM960604CXB*	34,000	26,400	14.00	11.50	1,165	6688178
	CA*F3642*6D*	A*VC950714CXB*	34,000	26,400	14.00	11.50	1,160	6688176

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (cont.)	CA*F3642*6D*	G*VM961155DXB*	34,000	26,400	14.00	11.50	1,210	6688188
	CA*F3642*6D*	G*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6688182
	CA*F3642*6D*	G*VM960805CXB*	34,000	26,400	14.00	11.50	1,165	6688185
	CA*F3642*6D*	G*VC950714CXB*	34,000	26,400	14.00	11.50	1,160	6688179
	CA*F3642*6D*	G*VC950905CXB*	34,000	26,400	14.00	11.50	1,165	6688180
	CA*F3642*6D*	G*VC950905DXB*	34,000	26,400	14.00	11.50	1,165	6688181
	CA*F3642*6D*	G*VC951155DXB*	34,000	26,400	14.00	11.50	1,210	6688183
	CA*F3642*6D*	G*VM961005DXB*	34,000	26,400	14.00	11.50	1,205	6688187
	CA*F3642*6D*	G*VM960604CXB*	34,000	26,400	14.00	11.50	1,165	6688184
	CA*F3642*6D*	A*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6688177
	CA*F3642*6D*	G*VM960805DXB*	34,000	26,400	14.00	11.50	1,225	6688186
	CA*F3642*6D*+EEP		33,600	26,200	13.00	11.00	1,200	6688189
	CA*F3642*6D*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,200	6688190
	CA*F3743*6D*	G*VM960805DXB*	34,000	26,400	14.00	11.50	1,225	6688201
	CA*F3743*6D*	A*VM970804CNA*	34,000	26,400	13.00	11.00	1,115	7359442
	CA*F3743*6D*	G*VC950714CXB*	34,000	26,400	14.00	11.50	1,165	6688194
	CA*F3743*6D*	G*VM961005DXB*	34,000	26,400	14.00	11.50	1,210	6688202
	CA*F3743*6D*	G*EC961004CNA*	33,600	26,200	13.50	11.50	1,100	7366884
	CA*F3743*6D*	A*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359444
	CA*F3743*6D*	A*EC961004CNA*	33,600	26,200	13.50	11.50	1,100	7366990
	CA*F3743*6D*	G*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359449
	CA*F3743*6D*	A*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359441
	CA*F3743*6D*	G*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359446
	CA*F3743*6D*	A*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359440
	CA*F3743*6D*	G*VM960805CXB*	34,000	26,400	14.00	11.50	1,185	6688200
	CA*F3743*6D*	A*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6688192
	CA*F3743*6D*	A*VM960604CXB*	34,000	26,400	14.00	11.50	1,170	6688193
	CA*F3743*6D*	G*VC950905DXB*	34,000	26,400	14.00	11.50	1,090	6688196
	CA*F3743*6D*	G*VM961155DXB*	34,000	26,400	14.00	11.50	1,210	6688203
	CA*F3743*6D*	G*VM960604CXB*	34,000	26,400	14.00	11.50	1,170	6688199
	CA*F3743*6D*	G*VC951155DXB*	34,000	26,400	14.00	11.50	1,210	6688198
	CA*F3743*6D*	G*VM970804CNA*	34,000	26,400	13.00	11.00	1,115	7359448
	CA*F3743*6D*	G*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359447
	CA*F3743*6D*	A*VC960804CNA*	34,000	26,400	13.00	11.00	1,115	7359439
	CA*F3743*6D*	A*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359443
	CA*F3743*6D*	G*VC960804CNA*	34,000	26,400	13.00	11.00	1,115	7359445
	CA*F3743*6D*	G*VC950905CXB*	34,000	26,400	14.00	11.50	1,185	6688195
	CA*F3743*6D*	G*VC950915DXB*	34,000	26,400	14.00	11.50	1,225	6688197
	CA*F3743*6D*	A*VC950714CXB*	34,000	26,400	14.00	11.50	1,165	6688191
	CA*F3743*6D*	G*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359450
	CA*F3743*6D*+EEP		34,200	26,600	13.00	11.00	1,200	6688204
	CA*F3743*6D*+EEP+TXV		34,200	26,600	13.50	11.00	1,200	6688205
	CA*F3743*6D*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,210	6688206
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359461
	CA*F3743*6D*+TXV	G*EC961004CNA*	33,600	26,200	14.00	11.50	1,100	7366885
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,000	26,400	13.50	11.30	1,115	7359454
	CA*F3743*6D*+TXV	A*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359453
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359452
	CA*F3743*6D*+TXV	G*EC960603BNA*	33,600	26,200	13.50	11.00	1,175	7366880
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359459
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,000	26,400	13.50	11.30	1,115	7359460
	CA*F3743*6D*+TXV	A*EC960803BNA*	33,400	26,000	13.50	11.00	1,075	7366988
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359456
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359462
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359455
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,000	26,400	13.50	11.30	1,115	7359451
	CA*F3743*6D*+TXV	A*EC961004CNA*	33,600	26,200	14.00	11.50	1,100	7366991
	CA*F3743*6D*+TXV	G*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359458
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,000	26,400	13.50	11.30	1,115	7359457

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (cont.)	CA*F3743*6D*+TXV	G*EC960803BNA*	33,400	26,000	13.50	11.00	1,075	7366882
	CA*F3743*6D*+TXV	A*EC960603BNA*	33,600	26,200	13.50	11.00	1,175	7366986
	CAPT3743*4A*	A*VM960805DXB*	34,000	26,400	13.50	11.50	1,175	6688219
	CAPT3743*4A*	AMEH960603BXA*	33,400	26,000	13.00	11.00	1,100	6946171
	CAPT3743*4A*	A*VC80805C*B*	34,000	26,400	13.50	11.50	1,190	6688208
	CAPT3743*4A*	G*VC960804CNA*	34,000	26,400	13.00	11.00	1,115	7359469
	CAPT3743*4A*	G*VC950905DXB*	34,000	26,400	13.50	11.50	1,170	6688234
	CAPT3743*4A*	A*EH800805C*A*	34,000	26,400	13.50	11.50	1,210	6946168
	CAPT3743*4A*	G*VC950714CXB*	34,000	26,400	13.50	11.50	1,250	6688232
	CAPT3743*4A*	G*VM970804CNA*	34,000	26,400	13.00	11.00	1,115	7359472
	CAPT3743*4A*	A*VC950905DXB*	34,000	26,400	13.50	11.50	1,170	6688213
	CAPT3743*4A*	A*VC951155DXB*	34,000	26,400	13.50	11.50	1,200	6688215
	CAPT3743*4A*	G*VC81005C*B*	34,000	26,400	13.50	11.50	1,210	6688230
	CAPT3743*4A*	A*VC961005CNA*	34,000	26,400	13.00	11.00	1,175	7359464
	CAPT3743*4A*	A*VC950915DXB*	34,000	26,400	13.50	11.50	1,210	6688214
	CAPT3743*4A*	G*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359471
	CAPT3743*4A*	G*EC961004CNA*	33,600	26,200	13.50	11.30	1,100	7366886
	CAPT3743*4A*	A*EH801005C*A*	34,000	26,400	13.50	11.50	1,230	6946169
	CAPT3743*4A*	G*VM961155DXB*	34,000	26,400	13.50	11.50	1,200	6688242
	CAPT3743*4A*	A*VM960604CXB*	34,000	26,400	13.50	11.50	1,250	6688217
	CAPT3743*4A*	G*VC950704CXB*	34,000	26,400	13.00	11.00	1,220	6688231
	CAPT3743*4A*	G*VC961005CNA*	34,000	26,400	13.00	11.00	1,175	7359470
	CAPT3743*4A*	AMEH961005DXA*	34,000	26,400	13.50	11.50	1,250	6946173
	CAPT3743*4A*	G*VM960805CXB*	34,000	26,400	13.50	11.50	1,175	6688239
	CAPT3743*4A*	AMEH960403BXA*	34,000	26,400	13.00	11.00	1,150	6946170
	CAPT3743*4A*	A*EC961004CNA*	33,600	26,200	13.50	11.30	1,100	7366992
	CAPT3743*4A*	A*VC950704CXB*	34,000	26,400	13.00	11.00	1,220	6688210
	CAPT3743*4A*	ADVC80603B*B*	34,000	26,400	13.50	11.50	1,165	6688222
	CAPT3743*4A*	A*EH800603B*A*	34,000	26,400	13.00	11.00	1,150	6946167
	CAPT3743*4A*	G*VM960604CXB*	34,000	26,400	13.50	11.50	1,250	6688238
	CAPT3743*4A*	A*VC950714CXB*	34,000	26,400	13.50	11.50	1,250	6688211
	CAPT3743*4A*	ADVC81005C*B*	34,000	26,400	13.50	11.50	1,235	6688224
	CAPT3743*4A*	A*VM961155DXB*	34,000	26,400	13.50	11.50	1,200	6688221
	CAPT3743*4A*	G*VM961005DXB*	34,000	26,400	13.50	11.50	1,170	6688241
	CAPT3743*4A*	GME951005DXA*	34,000	26,400	13.50	11.50	1,250	6688246
	CAPT3743*4A*	G*E80805C*B*	34,000	26,400	13.50	11.50	1,210	6688226
	CAPT3743*4A*	G*VC80604B*B*	34,000	26,400	13.50	11.50	1,220	6688228
	CAPT3743*4A*	GME950603BXA*	33,400	26,000	13.00	11.00	1,100	6688244
	CAPT3743*4A*	A*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359465
	CAPT3743*4A*	A*VM960603BXB*	34,000	26,400	13.00	11.00	1,220	6688216
	CAPT3743*4A*	AMEH960805CXA*	33,400	26,000	13.50	11.50	1,090	6946172
	CAPT3743*4A*	G*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359474
	CAPT3743*4A*	A*VM970804CNA*	34,000	26,400	13.00	11.00	1,115	7359466
	CAPT3743*4A*	A*VM960805CXB*	34,000	26,400	13.50	11.50	1,175	6688218
	CAPT3743*4A*	G*VC80805C*B*	34,000	26,400	13.50	11.50	1,190	6688229
	CAPT3743*4A*	G*VM971005CNA*	34,000	26,400	13.00	11.00	1,175	7359473
	CAPT3743*4A*	A*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359468
	CAPT3743*4A*	G*E81005C*B*	34,000	26,400	13.50	11.50	1,230	6688227
	CAPT3743*4A*	ADVC80805C*B*	34,000	26,400	13.50	11.50	1,190	6688223
	CAPT3743*4A*	G*VC950905CXB*	34,000	26,400	13.50	11.50	1,170	6688233
	CAPT3743*4A*	G*E80603B*B*	34,000	26,400	13.00	11.00	1,150	6688225
	CAPT3743*4A*	GME950805CXA*	33,400	26,000	13.50	11.50	1,090	6688245
	CAPT3743*4A*	G*VC951155DXB*	34,000	26,400	13.50	11.50	1,200	6688236
	CAPT3743*4A*	G*VC950915DXB*	34,000	26,400	13.50	11.50	1,210	6688235
	CAPT3743*4A*	A*VC960804CNA*	34,000	26,400	13.00	11.00	1,115	7359463
	CAPT3743*4A*	A*VM961005DXB*	34,000	26,400	13.50	11.50	1,170	6688220
	CAPT3743*4A*	G*VM960603BXB*	34,000	26,400	13.00	11.00	1,220	6688237
	CAPT3743*4A*	A*VC950905CXB*	34,000	26,400	13.50	11.50	1,170	6688212
	CAPT3743*4A*	A*VC81005C*B*	34,000	26,400	13.50	11.50	1,210	6688209

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (cont.)	CAPT3743*4A*	GME950403BXA*	34,000	26,400	13.00	11.00	1,150	6688243
	CAPT3743*4A*	A*VC80604B*B*	34,000	26,400	13.50	11.50	1,220	6688207
	CAPT3743*4A*	G*VM960805DXB*	34,000	26,400	13.50	11.50	1,175	6688240
	CAPT3743*4A*	A*VM971005CNA*	34,000	26,400	13.00	11.00	1,175	7359467
	CAPT3743*4A*+EEP		34,000	26,400	13.00	11.00	1,200	6688247
	CAPT3743*4A*+MBVC1200**-1A*		34,000	26,400	13.00	11.50	1,200	6688248
	CAPT3743*4A*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,205	6688249
	CAPT3743*4A*+MBVC2000**-1A*		34,000	26,400	14.00	11.50	1,205	6688250
	CHPF3636B6C*+EEP		34,000	26,400	13.00	11.00	1,200	6688251
	CHPF3642C6C*	A*VC960804CNA*	33,800	26,400	13.00	11.00	1,115	7359475
	CHPF3642C6C*	A*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359476
	CHPF3642C6C*	G*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359482
	CHPF3642C6C*	G*VM970804CNA*	33,800	26,400	13.00	11.00	1,115	7359481
	CHPF3642C6C*	G*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359480
	CHPF3642C6C*	G*VC960804CNA*	33,800	26,400	13.00	11.00	1,115	7359479
	CHPF3642C6C*	A*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359478
	CHPF3642C6C*	A*VM970804CNA*	33,800	26,400	13.00	11.00	1,115	7359477
	CHPF3642C6C*+EEP		34,000	26,400	13.00	11.00	1,200	6688252
	CHPF3642C6C*+MBVC1600**-1A*		34,000	26,400	14.00	11.50	1,210	6688253
	CHPF3642C6C*+TXV	G*VM970804CNA*	33,800	26,400	13.50	11.30	1,115	7359489
	CHPF3642C6C*+TXV	A*VM970804CNA*	33,800	26,400	13.50	11.30	1,115	7359485
	CHPF3642C6C*+TXV	G*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359490
	CHPF3642C6C*+TXV	G*VC960804CNA*	33,800	26,400	13.50	11.30	1,115	7359487
	CHPF3642C6C*+TXV	A*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359484
	CHPF3642C6C*+TXV	G*VC961005CNA*	34,000	26,400	13.50	11.30	1,175	7359488
	CHPF3642C6C*+TXV	A*VC960804CNA*	33,800	26,400	13.50	11.30	1,115	7359483
	CHPF3642C6C*+TXV	A*VM971005CNA*	34,000	26,400	13.50	11.30	1,175	7359486
	CHPF3642D6C*	G*VM960805DXB*	33,600	26,200	14.00	11.50	1,225	6688260
	CHPF3642D6C*	G*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359494
	CHPF3642D6C*	G*VM961005DXB*	33,600	26,200	14.00	11.50	1,210	6688261
	CHPF3642D6C*	G*VC950905CXB*	33,600	26,200	14.00	11.50	1,170	6688255
	CHPF3642D6C*	G*VC951155DXB*	33,600	26,200	14.00	11.50	1,210	6688257
	CHPF3642D6C*	G*VC950905DXB*	33,600	26,200	14.00	11.50	1,105	6688256
	CHPF3642D6C*	G*VM960805CXB*	33,600	26,200	14.00	11.50	1,170	6688259
	CHPF3642D6C*	A*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359491
	CHPF3642D6C*	G*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359493
	CHPF3642D6C*	G*VM961155DXB*	33,600	26,200	14.00	11.50	1,210	6688262
	CHPF3642D6C*	A*VM960604CXB*	33,600	26,200	14.00	11.50	1,170	6688254
	CHPF3642D6C*	G*VM960604CXB*	33,600	26,200	14.00	11.50	1,170	6688258
	CHPF3642D6C*	A*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359492
	CHPF3642D6C*+EEP		34,000	26,400	13.00	11.00	1,200	6688263
	CHPF3642D6C*+TXV	A*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359495
	CHPF3642D6C*+TXV	G*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359498
	CHPF3642D6C*+TXV	G*VC961205DNA*	34,000	26,400	13.50	11.30	1,150	7359497
	CHPF3642D6C*+TXV	A*VM971205DNA*	34,000	26,400	13.50	11.30	1,150	7359496
	CHPF3743C6B*	G*EC961004CNA*	33,600	26,200	13.50	11.30	1,100	7366887
	CHPF3743C6B*	A*EC961004CNA*	33,600	26,200	13.50	11.30	1,100	7366993
	CHPF3743C6B*+TXV	G*EC960803BNA*	33,400	26,000	13.50	11.00	1,075	7366883
	CHPF3743C6B*+TXV	G*EC961004CNA*	33,600	26,200	14.00	11.50	1,100	7366888
	CHPF3743C6B*+TXV	A*EC960803BNA*	33,400	26,000	13.50	11.00	1,075	7366989
	CHPF3743C6B*+TXV	G*EC960603BNA*	33,600	26,200	13.50	11.00	1,175	7366881
	CHPF3743C6B*+TXV	A*EC961004CNA*	33,600	26,200	14.00	11.50	1,100	7366994
	CHPF3743C6B*+TXV	A*EC960603BNA*	33,600	26,200	13.50	11.00	1,175	7366987
	CSCF3642N6D*	G*VM971205DNA*	33,600	26,200	13.50	11.30	1,150	7359510
	CSCF3642N6D*	A*VM970804CNA*	33,600	26,200	13.00	11.00	1,115	7359502
	CSCF3642N6D*	A*VM971205DNA*	33,600	26,200	13.50	11.30	1,150	7359504
	CSCF3642N6D*	G*VM970804CNA*	33,600	26,200	13.00	11.00	1,115	7359508
	CSCF3642N6D*	G*VC960804CNA*	33,600	26,200	13.00	11.00	1,115	7359505
	CSCF3642N6D*	A*VC961205DNA*	33,600	26,200	13.50	11.30	1,150	7359501

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (cont.)	CSCF3642N6D*	A*VC961005CNA*	33,800	26,400	13.50	11.30	1,175	7359500
	CSCF3642N6D*	A*VC960804CNA*	33,600	26,200	13.00	11.00	1,115	7359499
	CSCF3642N6D*	G*VC961005CNA*	33,800	26,400	13.50	11.30	1,175	7359506
	CSCF3642N6D*	G*VM971005CNA*	33,800	26,400	13.50	11.30	1,175	7359509
	CSCF3642N6D*	A*VM971005CNA*	33,800	26,400	13.50	11.30	1,175	7359503
	CSCF3642N6D*	G*VC961205DNA*	33,600	26,200	13.50	11.30	1,150	7359507
	CSCF3642N6D*+TXV	A*VC961205DNA*	33,600	26,200	13.50	11.30	1,150	7359513
	CSCF3642N6D*+TXV	A*VM971005CNA*	33,800	26,400	13.50	11.30	1,175	7359515
	CSCF3642N6D*+TXV	G*VC961205DNA*	33,600	26,200	13.50	11.30	1,150	7359519
	CSCF3642N6D*+TXV	G*VC960804CNA*	33,600	26,200	13.00	11.00	1,115	7359517
	CSCF3642N6D*+TXV	A*VC961005CNA*	33,800	26,400	13.50	11.30	1,175	7359512
	CSCF3642N6D*+TXV	G*VM971005CNA*	33,800	26,400	13.50	11.30	1,175	7359521
	CSCF3642N6D*+TXV	A*VM970804CNA*	33,600	26,200	13.00	11.00	1,115	7359514
	CSCF3642N6D*+TXV	A*VC960804CNA*	33,600	26,200	13.00	11.00	1,115	7359511
	CSCF3642N6D*+TXV	G*VC961005CNA*	33,800	26,400	13.50	11.30	1,175	7359518
	CSCF3642N6D*+TXV	G*VM970804CNA*	33,600	26,200	13.00	11.00	1,115	7359520
	CSCF3642N6D*+TXV	A*VM971205DNA*	33,600	26,200	13.50	11.30	1,150	7359516
	CSCF3642N6D*+TXV	G*VM971205DNA*	33,600	26,200	13.50	11.30	1,150	7359522
ANX13 0421A*	ARPT42D14A*		40,000	30,600	13.00	11.00	1,280	6688264
	ARPT48D14A*		40,500	31,000	13.50	11.50	1,280	6688265
	ARUF42C14A*		39,500	30,200	13.00	11.00	1,280	6688266
	ARUF42C14A*+TXV		39,500	30,200	13.00	11.00	1,280	6688267
	ARUF48D14A*		39,500	30,200	13.00	11.00	1,350	6688268
	ASPT42D14A*		40,500	31,000	14.00	12.00	1,385	6688269
	ASPT48C14A*		39,500	30,200	13.50	11.50	1,300	7080468
	ASUF39C14A*		38,500	29,600	13.50	11.50	1,435	6688270
	ASUF39C14A*+TXV		38,500	29,600	13.80	11.80	1,435	6688271
	ASUF49C14A*		39,500	30,200	13.50	11.50	1,310	6688272
	ASUF49C14A*+TXV		39,500	30,200	13.80	11.70	1,310	6688273
	AVPTC42D14A*		40,500	31,000	14.00	12.00	1,495	6688274
	AVPTC48C14A*		39,500	30,200	13.50	11.50	1,300	7080469
	CA*F3642*6D*	G*E80805C*B*	40,000	30,600	13.00	11.30	1,350	6688275
	CA*F3642*6D*	A*EH800805C*A*	40,000	30,600	13.00	11.30	1,350	6946174
	CA*F3642*6D*+EEP		40,000	30,600	13.00	11.00	1,400	6688276
	CA*F3642*6D*+EEP+TXV		40,000	30,600	13.00	11.00	1,400	6688277
	CA*F3743*6D*	G*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359532
	CA*F3743*6D*	A*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359526
	CA*F3743*6D*	G*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359533
	CA*F3743*6D*	A*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359523
	CA*F3743*6D*	G*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359529
	CA*F3743*6D*	A*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7359528
	CA*F3743*6D*	A*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359524
	CA*F3743*6D*	G*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7359531
	CA*F3743*6D*	A*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359527
	CA*F3743*6D*	G*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359530
	CA*F3743*6D*	G*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7359534
	CA*F3743*6D*	A*EH800805C*A*	40,000	30,600	13.00	11.30	1,350	6946175
	CA*F3743*6D*	G*E80805C*B*	40,000	30,600	13.00	11.30	1,350	6688278
	CA*F3743*6D*	A*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7359525
	CA*F3743*6D*+EEP		40,000	30,600	13.00	11.00	1,400	6688279
	CA*F3743*6D*+TXV	A*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359539
	CA*F3743*6D*+TXV	A*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359538
	CA*F3743*6D*+TXV	A*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7359537
	CA*F3743*6D*+TXV	A*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7359540
	CA*F3743*6D*+TXV	G*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7359546
	CA*F3743*6D*+TXV	G*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359542
	CA*F3743*6D*+TXV	G*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359545
	CA*F3743*6D*+TXV	G*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359541

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (cont.)	CA*F3743*6D*+TXV	A*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359536
	CA*F3743*6D*+TXV	G*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359544
	CA*F3743*6D*+TXV	G*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7359543
	CA*F3743*6D*+TXV	A*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359535
	CA*F4860*6D*	G*VM961005DXB*	41,000	31,400	14.00	11.50	1,400	6688299
	CA*F4860*6D*	A*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366995
	CA*F4860*6D*	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359548
	CA*F4860*6D*	G*VC951155DXB*	41,000	31,400	14.00	11.50	1,400	6688295
	CA*F4860*6D*	A*EH800805C*A*	41,000	31,400	13.50	11.50	1,510	6946176
	CA*F4860*6D*	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359555
	CA*F4860*6D*	A*VM960805DXB*	41,000	31,400	14.00	11.50	1,400	6688287
	CA*F4860*6D*	AMEH961005DXA*	40,500	31,000	13.50	11.00	1,440	6946178
	CA*F4860*6D*	AMEH960805CXA*	40,500	31,000	14.00	11.30	1,400	6946177
	CA*F4860*6D*	A*VM960604CXB*	41,000	31,400	14.00	11.50	1,400	6688285
	CA*F4860*6D*	G*E80805C*B*	41,000	31,400	13.50	11.50	1,510	6688290
	CA*F4860*6D*	G*VM960604CXB*	41,000	31,400	14.00	11.50	1,400	6688296
	CA*F4860*6D*	G*EC961205DNA*	40,000	30,600	13.50	11.30	1,400	7366894
	CA*F4860*6D*	G*VM960805DXB*	41,000	31,400	14.00	11.50	1,400	6688298
	CA*F4860*6D*	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359556
	CA*F4860*6D*	G*VM961155DXB*	41,000	31,400	14.00	11.50	1,400	6688300
	CA*F4860*6D*	A*VM961155DXB*	41,000	31,400	14.00	11.50	1,400	6688289
	CA*F4860*6D*	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359558
	CA*F4860*6D*	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359553
	CA*F4860*6D*	A*VC950714CXB*	41,000	31,400	14.00	11.50	1,400	6688280
	CA*F4860*6D*	A*EC961205DNA*	40,000	30,600	13.50	11.30	1,400	7367000
	CA*F4860*6D*	G*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366889
	CA*F4860*6D*	A*VC950905CXB*	41,000	31,400	14.00	11.50	1,400	6688281
	CA*F4860*6D*	G*VC950915DXB*	41,000	31,400	14.00	11.50	1,400	6688294
	CA*F4860*6D*	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359557
	CA*F4860*6D*	GME950805CXA*	40,500	31,000	14.00	11.30	1,400	6688301
	CA*F4860*6D*	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359547
	CA*F4860*6D*	G*VC950905DXB*	41,000	31,400	14.00	11.50	1,400	6688293
	CA*F4860*6D*	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359552
	CA*F4860*6D*	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359550
	CA*F4860*6D*	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359549
	CA*F4860*6D*	A*VC951155DXB*	41,000	31,400	14.00	11.50	1,400	6688284
	CA*F4860*6D*	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359551
	CA*F4860*6D*	G*VM960805CXB*	41,000	31,400	14.00	11.50	1,400	6688297
	CA*F4860*6D*	A*VM961005DXB*	41,000	31,400	14.00	11.50	1,400	6688288
	CA*F4860*6D*	A*VC950915DXB*	41,000	31,400	14.00	11.50	1,400	6688283
	CA*F4860*6D*	GME951005DXA*	40,500	31,000	13.50	11.00	1,440	6688302
	CA*F4860*6D*	A*VC950905DXB*	41,000	31,400	14.00	11.50	1,400	6688282
	CA*F4860*6D*	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359554
	CA*F4860*6D*	A*VM960805CXB*	41,000	31,400	14.00	11.50	1,400	6688286
	CA*F4860*6D*	G*VC950714CXB*	41,000	31,400	14.00	11.50	1,400	6688291
	CA*F4860*6D*	G*VC950905CXB*	41,000	31,400	14.00	11.50	1,400	6688292
	CA*F4860*6D*+EEP		41,000	31,400	13.00	11.00	1,400	6688303
	CA*F4860*6D*+MBVC1600**-1A*		41,000	31,400	14.00	11.50	1,400	6688304
	CA*F4860*6D*+TXV	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359559
	CA*F4860*6D*+TXV	A*EC961205DNA*	40,000	30,600	14.00	11.50	1,400	7367001
	CA*F4860*6D*+TXV	G*EC961205DNA*	40,000	30,600	14.00	11.50	1,400	7366895
	CA*F4860*6D*+TXV	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359568
	CA*F4860*6D*+TXV	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359561
	CA*F4860*6D*+TXV	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359566
	CA*F4860*6D*+TXV	G*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366890
	CA*F4860*6D*+TXV	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359560
	CA*F4860*6D*+TXV	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359565
	CA*F4860*6D*+TXV	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359569
	CA*F4860*6D*+TXV	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359564

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (cont.)	CA*F4860*6D*+TXV	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359570
	CA*F4860*6D*+TXV	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359567
	CA*F4860*6D*+TXV	A*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366996
	CA*F4860*6D*+TXV	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359562
	CA*F4860*6D*+TXV	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359563
	CA*F4961*6D*+EEP		41,000	31,400	13.00	11.00	1,400	6688305
	CAPT4961*4A*	G*VM960805CXB*	41,000	31,400	14.00	12.00	1,400	6994228
	CAPT4961*4A*	G*VM960603BxB*	40,500	31,000	13.50	11.50	1,320	6994227
	CAPT4961*4A*	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359575
	CAPT4961*4A*	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359579
	CAPT4961*4A*	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359580
	CAPT4961*4A*	G*VC950704CXB*	41,000	31,400	14.00	12.00	1,400	6994222
	CAPT4961*4A*	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359577
	CAPT4961*4A*	G*EC961205DNA*	40,500	31,000	14.00	11.50	1,400	7366896
	CAPT4961*4A*	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359573
	CAPT4961*4A*	G*VM961005DXB*	41,000	31,400	14.00	12.00	1,400	6994230
	CAPT4961*4A*	GME951005DXA*	41,000	31,400	14.00	12.00	1,440	6994233
	CAPT4961*4A*	G*E80603B*B*	41,000	31,400	13.50	11.50	1,355	6994219
	CAPT4961*4A*	G*VC950915DXB*	41,000	31,400	14.00	12.00	1,400	6994225
	CAPT4961*4A*	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359571
	CAPT4961*4A*	G*E81005C*B*	41,000	31,400	14.00	12.00	1,300	6994221
	CAPT4961*4A*	A*VC950704CXB*	41,000	31,400	14.00	12.00	1,400	6994237
	CAPT4961*4A*	G*VC951155DXB*	41,000	31,400	14.00	12.00	1,425	6994226
	CAPT4961*4A*	ADVC80805C*B*	41,000	31,400	14.00	12.00	1,380	6994247
	CAPT4961*4A*	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359576
	CAPT4961*4A*	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359574
	CAPT4961*4A*	A*VC951155DXB*	41,000	31,400	14.00	12.00	1,425	6994241
	CAPT4961*4A*	G*VM961155DXB*	41,000	31,400	14.00	12.00	1,400	6994231
	CAPT4961*4A*	A*VM961155DXB*	41,000	31,400	14.00	12.00	1,400	6994246
	CAPT4961*4A*	A*VC81005C*B*	41,000	31,400	14.00	12.00	1,370	6994236
	CAPT4961*4A*	G*VC950905DXB*	41,000	31,400	14.00	12.00	1,400	6994224
	CAPT4961*4A*	A*VC950905DXB*	41,000	31,400	14.00	12.00	1,400	6994239
	CAPT4961*4A*	A*VM960603BxB*	40,500	31,000	13.50	11.50	1,320	6994242
	CAPT4961*4A*	A*VM960805CXB*	41,000	31,400	14.00	12.00	1,400	6994243
	CAPT4961*4A*	A*VC950915DXB*	41,000	31,400	14.00	12.00	1,400	6994240
	CAPT4961*4A*	A*VC80604B*B*	41,000	31,400	14.00	12.00	1,410	6994234
	CAPT4961*4A*	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359572
	CAPT4961*4A*	A*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366997
	CAPT4961*4A*	ADVC81005C*B*	41,000	31,400	14.00	12.00	1,405	6994248
	CAPT4961*4A*	G*VC950714CXB*	41,000	31,400	14.00	12.00	1,400	6994223
	CAPT4961*4A*	A*EC961205DNA*	40,500	31,000	14.00	11.50	1,400	7367002
	CAPT4961*4A*	A*VC950714CXB*	41,000	31,400	14.00	12.00	1,400	6994238
	CAPT4961*4A*	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359578
	CAPT4961*4A*	GME950805CXA*	40,500	31,000	14.00	12.00	1,400	6994232
	CAPT4961*4A*	G*VM960805DXB*	41,000	31,400	14.00	12.00	1,400	6994229
	CAPT4961*4A*	G*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366891
	CAPT4961*4A*	A*VC80805C*B*	41,000	31,400	14.00	12.00	1,395	6994235
	CAPT4961*4A*	A*VM961005DXB*	41,000	31,400	14.00	12.00	1,400	6994245
	CAPT4961*4A*	A*VM960805DXB*	41,000	31,400	14.00	12.00	1,400	6994244
	CAPT4961*4A*	G*E80805C*B*	41,000	31,400	14.00	12.00	1,350	6994220
	CAPT4961*4A*	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359581
	CAPT4961*4A*	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359582
	CAPT4961*4A*+EEP		40,500	31,000	13.00	11.00	1,400	6688306
	CAPT4961*4A*+MBVC1600**-1A*		41,000	31,400	14.00	11.50	1,375	6688307
	CAPT4961*4A*+MBVC2000**-1A*		41,000	31,400	14.00	11.50	1,400	6688308
	CHPF3642C6C*	G*E80805C*B*	40,000	30,600	13.00	11.30	1,350	6688309
	CHPF3642C6C*	A*EH800805C*A*	40,000	30,600	13.00	11.30	1,350	6946179
	CHPF3642C6C*+EEP		40,000	30,600	13.00	11.00	1,400	6688310
	CHPF3642D6C*	G*VM960805CXB*	40,000	30,600	13.50	11.30	1,400	6688320
	CHPF3642D6C*	G*VC91155DXA*	40,000	30,600	13.50	11.30	1,400	6688316

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (cont.)	CHPF3642D6C*	G*VM960604CXB*	40,000	30,600	13.50	11.30	1,400	6688319
	CHPF3642D6C*	A*VM960805CXB*	40,000	30,600	13.50	11.30	1,400	6688314
	CHPF3642D6C*	A*VM960604CXB*	40,000	30,600	13.50	11.30	1,400	6688313
	CHPF3642D6C*	G*VC950905CXB*	40,000	30,600	13.50	11.30	1,400	6688317
	CHPF3642D6C*	G*VM960805DXB*	40,000	30,600	13.50	11.30	1,400	6688321
	CHPF3642D6C*	A*VM960805DXB*	40,000	30,600	13.50	11.30	1,400	6688315
	CHPF3642D6C*	A*VC950905DXB*	40,000	30,600	13.50	11.30	1,400	6688312
	CHPF3642D6C*	G*VC950905DXB*	40,000	30,600	13.50	11.30	1,400	6688318
	CHPF3642D6C*	A*VC950905CXB*	40,000	30,600	13.50	11.30	1,400	6688311
	CHPF3642D6C*+EEP		40,000	30,600	13.00	11.00	1,400	6688322
	CHPF3743C6B*	G*VM971205DNA*	40,000	30,600	13.50	11.30	1,250	7360617
	CHPF3743C6B*	A*VC961205DNA*	40,000	30,600	13.50	11.30	1,250	7360614
	CHPF3743C6B*	A*VM970804CNA*	40,500	31,000	13.50	11.30	1,300	7359585
	CHPF3743C6B*	A*VC960804CNA*	40,500	31,000	13.50	11.30	1,300	7359583
	CHPF3743C6B*	A*VM971005CNA*	40,500	31,000	13.50	11.30	1,300	7359586
	CHPF3743C6B*	G*VC960804CNA*	40,500	31,000	13.50	11.30	1,300	7359587
	CHPF3743C6B*	A*VC961005CNA*	40,500	31,000	13.50	11.30	1,300	7359584
	CHPF3743C6B*	G*VC961005CNA*	40,500	31,000	13.50	11.30	1,300	7359588
	CHPF3743C6B*	G*VM971005CNA*	40,500	31,000	13.50	11.30	1,300	7359590
	CHPF3743C6B*	A*VM971205DNA*	40,000	30,600	13.50	11.30	1,250	7360615
	CHPF3743C6B*	G*VC961205DNA*	40,000	30,600	13.50	11.30	1,250	7360616
	CHPF3743C6B*	G*VM970804CNA*	40,500	31,000	13.50	11.30	1,300	7359589
	CHPF3743C6B*+EEP		40,000	30,600	13.00	11.00	1,400	6688323
	CHPF3743C6B*+TXV	A*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359593
	CHPF3743C6B*+TXV	G*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7360621
	CHPF3743C6B*+TXV	A*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359591
	CHPF3743C6B*+TXV	A*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7360618
	CHPF3743C6B*+TXV	G*VC960804CNA*	40,500	31,000	14.00	11.50	1,300	7359595
	CHPF3743C6B*+TXV	G*VM970804CNA*	40,500	31,000	14.00	11.50	1,300	7359597
	CHPF3743C6B*+TXV	A*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359594
	CHPF3743C6B*+TXV	A*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359592
	CHPF3743C6B*+TXV	G*VM971005CNA*	40,500	31,000	14.00	11.50	1,300	7359598
	CHPF3743C6B*+TXV	G*VC961005CNA*	40,500	31,000	14.00	11.50	1,300	7359596
	CHPF3743C6B*+TXV	G*VC961205DNA*	40,000	30,600	14.00	11.50	1,250	7360620
	CHPF3743C6B*+TXV	A*VM971205DNA*	40,000	30,600	14.00	11.50	1,250	7360619
	CHPF4860D6D*	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359600
	CHPF4860D6D*	A*VC950905CXB*	41,000	31,400	14.00	11.50	1,400	6688324
	CHPF4860D6D*	A*EH800805C*A*	41,000	31,400	13.50	11.50	1,510	6946180
	CHPF4860D6D*	G*VC950905DXB*	41,000	31,400	14.00	11.50	1,400	6688334
	CHPF4860D6D*	G*VM961155DXB*	41,000	31,400	14.00	11.50	1,400	6688340
	CHPF4860D6D*	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359599
	CHPF4860D6D*	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359605
	CHPF4860D6D*	A*VC951155DXB*	41,000	31,400	14.00	11.50	1,400	6688326
	CHPF4860D6D*	GME950805CXA*	40,500	31,000	14.00	11.30	1,400	6688341
	CHPF4860D6D*	A*VM960805CXB*	41,000	31,400	14.00	11.50	1,400	6688328
	CHPF4860D6D*	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359601
	CHPF4860D6D*	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359609
	CHPF4860D6D*	AMEH961005DXA*	40,500	31,000	13.50	11.00	1,440	6946182
	CHPF4860D6D*	A*VM961155DXB*	41,000	31,400	14.00	11.50	1,400	6688331
	CHPF4860D6D*	G*VC950905CXB*	41,000	31,400	14.00	11.50	1,400	6688333
	CHPF4860D6D*	G*VM961005DXB*	41,000	31,400	14.00	11.50	1,400	6688339
	CHPF4860D6D*	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359602
	CHPF4860D6D*	G*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366892
	CHPF4860D6D*	G*VM960604CXB*	41,000	31,400	14.00	11.50	1,400	6688336
	CHPF4860D6D*	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359603
	CHPF4860D6D*	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359608
	CHPF4860D6D*	A*VC950905DXB*	41,000	31,400	14.00	11.50	1,400	6688325
	CHPF4860D6D*	AMEH960805CXA*	40,500	31,000	14.00	11.30	1,400	6946181
	CHPF4860D6D*	G*E80805C*B*	41,000	31,400	13.50	11.50	1,510	6688332
	CHPF4860D6D*	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359607

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (cont.)	CHPF4860D6D*	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359606
	CHPF4860D6D*	A*VM960604CXB*	41,000	31,400	14.00	11.50	1,400	6688327
	CHPF4860D6D*	A*VM961005DXB*	41,000	31,400	14.00	11.50	1,400	6688330
	CHPF4860D6D*	G*VM960805DXB*	41,000	31,400	14.00	11.50	1,400	6688338
	CHPF4860D6D*	G*VM960805CXB*	41,000	31,400	14.00	11.50	1,400	6688337
	CHPF4860D6D*	A*VM960805DXB*	41,000	31,400	14.00	11.50	1,400	6688329
	CHPF4860D6D*	GME951005DXA*	40,500	31,000	13.50	11.00	1,440	6688342
	CHPF4860D6D*	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359604
	CHPF4860D6D*	A*EC961205DNA*	40,500	31,000	13.50	11.30	1,400	7367003
	CHPF4860D6D*	G*EC961205DNA*	40,500	31,000	13.50	11.30	1,400	7366897
	CHPF4860D6D*	A*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366998
	CHPF4860D6D*	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359610
	CHPF4860D6D*	G*VC951155DXB*	41,000	31,400	14.00	11.50	1,400	6688335
	CHPF4860D6D*+EEP		41,000	31,400	13.00	11.00	1,400	6688343
	CHPF4860D6D*+MBVC1600**-1A*		41,000	31,400	14.00	11.50	1,400	6688344
	CHPF4860D6D*+TXV	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359613
	CHPF4860D6D*+TXV	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359621
	CHPF4860D6D*+TXV	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359615
	CHPF4860D6D*+TXV	G*EC961205DNA*	40,500	31,000	14.00	11.50	1,400	7366898
	CHPF4860D6D*+TXV	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359620
	CHPF4860D6D*+TXV	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359614
	CHPF4860D6D*+TXV	A*EC961205DNA*	40,500	31,000	14.00	11.50	1,400	7367004
	CHPF4860D6D*+TXV	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359618
	CHPF4860D6D*+TXV	G*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366893
	CHPF4860D6D*+TXV	A*EC961004CNA*	39,500	30,200	14.00	11.50	1,275	7366999
	CHPF4860D6D*+TXV	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359612
	CHPF4860D6D*+TXV	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359611
	CHPF4860D6D*+TXV	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359616
	CHPF4860D6D*+TXV	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359619
	CHPF4860D6D*+TXV	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359617
	CHPF4860D6D*+TXV	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359622
	CSCF3642N6D*+EEP		40,000	30,600	13.00	11.00	1,325	6688345
	CSCF4860N6D*	G*VC960804CNA*	41,000	31,400	13.50	11.30	1,300	7359629
	CSCF4860N6D*	A*VM970804CNA*	41,000	31,400	13.50	11.30	1,300	7359626
	CSCF4860N6D*	A*VC960804CNA*	41,000	31,400	13.50	11.30	1,300	7359623
	CSCF4860N6D*	G*VC950905CXB*	41,000	31,400	13.50	11.30	1,450	6688347
	CSCF4860N6D*	G*VM971205DNA*	40,500	31,000	13.50	11.30	1,250	7359634
	CSCF4860N6D*	A*VM971205DNA*	40,500	31,000	13.50	11.30	1,250	7359628
	CSCF4860N6D*	G*VC961205DNA*	40,500	31,000	13.50	11.30	1,250	7359631
	CSCF4860N6D*	G*VM971005CNA*	41,000	31,400	13.50	11.50	1,300	7359633
	CSCF4860N6D*	A*VC961205DNA*	40,500	31,000	13.50	11.30	1,250	7359625
	CSCF4860N6D*	A*VM971005CNA*	41,000	31,400	13.50	11.50	1,300	7359627
	CSCF4860N6D*	G*VC951155DXB*	41,000	31,400	13.50	11.30	1,425	6688348
	CSCF4860N6D*	A*VC951155DXB*	41,000	31,400	13.50	11.30	1,425	6688346
	CSCF4860N6D*	A*VC961005CNA*	41,000	31,400	13.50	11.50	1,300	7359624
	CSCF4860N6D*	G*VM970804CNA*	41,000	31,400	13.50	11.30	1,300	7359632
	CSCF4860N6D*	G*VC961005CNA*	41,000	31,400	13.50	11.50	1,300	7359630
	CSCF4860N6D*+EEP		41,000	31,400	13.00	11.00	1,325	6688349
	CSCF4860N6D*+TXV	A*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359638
	CSCF4860N6D*+TXV	A*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359635
	CSCF4860N6D*+TXV	G*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359646
	CSCF4860N6D*+TXV	A*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359639
	CSCF4860N6D*+TXV	G*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359643
	CSCF4860N6D*+TXV	G*VM971005CNA*	41,000	31,400	14.00	11.50	1,300	7359645
	CSCF4860N6D*+TXV	G*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359642
	CSCF4860N6D*+TXV	A*VC961005CNA*	41,000	31,400	14.00	11.50	1,300	7359636
	CSCF4860N6D*+TXV	A*VC961205DNA*	40,500	31,000	14.00	11.50	1,250	7359637
	CSCF4860N6D*+TXV	G*VM970804CNA*	41,000	31,400	14.00	11.50	1,300	7359644
	CSCF4860N6D*+TXV	G*VC960804CNA*	41,000	31,400	14.00	11.50	1,300	7359641
	CSCF4860N6D*+TXV	A*VM971205DNA*	40,500	31,000	14.00	11.50	1,250	7359640

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0481A*	ARPT48D14A*		46,000	35,200	13.50	11.00	1,475	6688350
	ARPT60D14A*		46,000	35,200	13.50	11.00	1,500	6688351
	ARUF48D14A*		44,500	34,200	13.00	11.00	1,550	6688352
	ARUF48D14A*+TXV		44,500	34,200	13.00	11.00	1,550	6688353
	ARUF60D14A*		44,500	34,200	13.00	11.00	1,460	6688354
	ARUF60D14A*+TXV		44,500	34,200	13.00	11.00	1,460	6688355
	ASPT48C14A*		44,000	33,800	13.00	11.00	1,400	7080480
	ASPT48D14A*		46,000	35,200	13.80	11.30	1,600	6688356
	ASPT60D14A*		46,000	35,200	13.80	11.30	1,600	6688357
	ASUF49C14A*		43,000	33,000	13.00	11.00	1,435	6688358
	ASUF49C14A*+TXV		43,000	33,000	13.30	11.00	1,435	6688359
	AVPTC48C14A*		44,000	33,800	13.00	11.00	1,450	7080481
	AVPTC48D14A*		46,000	35,200	13.80	11.30	1,615	6688360
	CA*F4860*6D*+EEP		46,000	35,200	13.00	11.00	1,600	6688361
	CA*F4860*6D*+MBVC2000**-1A*		46,000	35,200	14.00	11.30	1,600	6688362
	CA*F4860*6D*+TXV	A*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6688369
	CA*F4860*6D*+TXV	G*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6688382
	CA*F4860*6D*+TXV	A*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6688365
	CA*F4860*6D*+TXV	A*VC950915DXB*	46,000	35,200	14.00	11.30	1,620	6688366
	CA*F4860*6D*+TXV	G*VM960604CXB*	46,000	35,200	14.00	11.30	1,620	6688380
	CA*F4860*6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6688379
	CA*F4860*6D*+TXV	G*E80805C*B*	46,000	35,200	13.50	11.30	1,650	6688373
	CA*F4860*6D*+TXV	G*VC950915DXB*	46,000	35,200	14.00	11.30	1,620	6688378
	CA*F4860*6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6688377
	CA*F4860*6D*+TXV	G*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6688381
	CA*F4860*6D*+TXV	A*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6688371
	CA*F4860*6D*+TXV	A*VM960604CXB*	46,000	35,200	14.00	11.30	1,550	6688368
	CA*F4860*6D*+TXV	AMEH960805CXA*	45,500	34,800	14.00	11.30	1,550	6946185
	CA*F4860*6D*+TXV	A*VC950714CXB*	46,000	35,200	14.00	11.30	1,550	6688363
	CA*F4860*6D*+TXV	A*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6688364
	CA*F4860*6D*+TXV	A*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6688370
	CA*F4860*6D*+TXV	A*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6688367
	CA*F4860*6D*+TXV	G*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6688384
	CA*F4860*6D*+TXV	G*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7366899
	CA*F4860*6D*+TXV	A*EH800805C*A*	46,000	35,200	13.50	11.30	1,650	6946183
	CA*F4860*6D*+TXV	GME951005DXA*	45,500	34,800	13.70	11.30	1,650	6688386
	CA*F4860*6D*+TXV	GME950805CXA*	45,500	34,800	14.00	11.30	1,550	6688385
	CA*F4860*6D*+TXV	G*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6688383
	CA*F4860*6D*+TXV	A*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6688372
	CA*F4860*6D*+TXV	G*E81005C*B*	46,000	35,200	13.50	11.30	1,570	6688374
	CA*F4860*6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6688376
	CA*F4860*6D*+TXV	G*VC950714CXB*	46,000	35,200	14.00	11.30	1,620	6688375
	CA*F4860*6D*+TXV	AMEH961005DXA*	45,500	34,800	13.70	11.30	1,650	6946186
	CA*F4860*6D*+TXV	A*EH801005C*A*	46,000	35,200	13.50	11.30	1,570	6946184
	CA*F4860*6D*+TXV	A*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7367005
	CA*F4961*6D*	A*EC961205DNA*	45,500	34,800	14.00	11.50	1,525	7367010
	CA*F4961*6D*	G*EC961205DNA*	45,500	34,800	14.00	11.50	1,525	7366904
	CA*F4961*6D*+EEP		46,000	35,200	13.00	11.00	1,600	6688387
	CA*F4961*6D*+TXV	G*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7366900
	CA*F4961*6D*+TXV	A*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359648
	CA*F4961*6D*+TXV	G*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359654
	CA*F4961*6D*+TXV	A*VM970804CNA*	45,000	34,600	14.00	11.50	1,585	7359650
	CA*F4961*6D*+TXV	G*VC960804CNA*	45,000	34,600	14.00	11.50	1,585	7359653
	CA*F4961*6D*+TXV	A*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7367006
	CA*F4961*6D*+TXV	A*EC961205DNA*	46,000	35,200	14.00	11.50	1,525	7367011
	CA*F4961*6D*+TXV	G*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359657
	CA*F4961*6D*+TXV	A*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359652
	CA*F4961*6D*+TXV	A*VC960804CNA*	45,000	34,600	14.00	11.50	1,585	7359647
	CA*F4961*6D*+TXV	G*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359655

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0481A* (cont.)	CA*F4961*6D*+TXV	A*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359651
	CA*F4961*6D*+TXV	G*EC961205DNA*	46,000	35,200	14.00	11.50	1,525	7366905
	CA*F4961*6D*+TXV	G*VM970804CNA*	45,000	34,600	14.00	11.50	1,585	7359656
	CA*F4961*6D*+TXV	A*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359649
	CA*F4961*6D*+TXV	G*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359658
	CAPT4961*4A*	A*VM960805CXB*	47,000	36,000	13.00	11.00	1,620	6994305
	CAPT4961*4A*	G*VC950915DXB*	46,000	35,200	13.50	11.50	1,575	6994289
	CAPT4961*4A*	G*EC961205DNA*	46,000	35,200	13.50	11.30	1,525	7366906
	CAPT4961*4A*	G*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359667
	CAPT4961*4A*	A*VC950905DXB*	47,000	36,000	13.50	11.50	1,575	6994302
	CAPT4961*4A*	G*VM960805CXB*	47,000	36,000	13.00	11.00	1,620	6994291
	CAPT4961*4A*	A*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359664
	CAPT4961*4A*	A*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359660
	CAPT4961*4A*	A*EC961205DNA*	46,000	35,200	13.50	11.30	1,525	7367012
	CAPT4961*4A*	GME950805CXA*	47,000	36,000	13.00	11.00	1,550	6994294
	CAPT4961*4A*	ADV80805C*B*	47,000	36,000	13.50	11.50	1,585	6994309
	CAPT4961*4A*	A*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359661
	CAPT4961*4A*	G*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359669
	CAPT4961*4A*	G*VC950714CXB*	46,000	35,200	13.00	11.00	1,550	6994286
	CAPT4961*4A*	G*VC950704CXB*	47,000	36,000	13.00	11.00	1,650	6994285
	CAPT4961*4A*	G*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7366901
	CAPT4961*4A*	A*VC960804CNA*	45,000	34,600	13.50	11.30	1,585	7359659
	CAPT4961*4A*	G*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359666
	CAPT4961*4A*	A*VC950915DXB*	46,000	35,200	13.50	11.50	1,575	6994303
	CAPT4961*4A*	A*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359663
	CAPT4961*4A*	G*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359670
	CAPT4961*4A*	G*E80805C*B*	46,000	35,200	13.50	11.50	1,480	6994283
	CAPT4961*4A*	A*VM970804CNA*	45,000	34,600	13.50	11.30	1,585	7359662
	CAPT4961*4A*	G*E81005C*B*	47,000	36,000	13.50	11.50	1,570	6994284
	CAPT4961*4A*	A*VM961155DXB*	47,000	36,000	13.50	11.50	1,620	6994308
	CAPT4961*4A*	A*VC80805C*B*	47,000	36,000	13.50	11.50	1,590	6994297
	CAPT4961*4A*	A*VC951155DXB*	47,000	36,000	13.50	11.50	1,550	6994304
	CAPT4961*4A*	A*VC80604B*B*	47,000	36,000	13.50	11.50	1,545	6994296
	CAPT4961*4A*	G*VC950905CXB*	47,000	36,000	13.00	11.00	1,575	6994287
	CAPT4961*4A*	G*VC950905DXB*	47,000	36,000	13.50	11.50	1,575	6994288
	CAPT4961*4A*	A*VC81005C*B*	47,000	36,000	13.50	11.50	1,600	6994298
	CAPT4961*4A*	GME951005DXA*	47,000	36,000	13.50	11.50	1,650	6994295
	CAPT4961*4A*	A*VC950905CXB*	47,000	36,000	13.00	11.00	1,575	6994301
	CAPT4961*4A*	A*VC950704CXB*	47,000	36,000	13.00	11.00	1,650	6994299
	CAPT4961*4A*	ADV81005C*B*	47,000	36,000	13.50	11.50	1,620	6994310
	CAPT4961*4A*	A*VM960805DXB*	47,000	36,000	13.50	11.50	1,620	6994306
	CAPT4961*4A*	G*VM960805DXB*	47,000	36,000	13.50	11.50	1,620	6994292
	CAPT4961*4A*	G*VC960804CNA*	45,000	34,600	13.50	11.30	1,585	7359665
	CAPT4961*4A*	G*VC951155DXB*	47,000	36,000	13.50	11.50	1,550	6994290
	CAPT4961*4A*	A*VM961005DXB*	47,000	36,000	13.00	11.00	1,620	6994307
	CAPT4961*4A*	A*EC961004CNA*	46,000	35,200	14.00	11.50	1,550	7367007
	CAPT4961*4A*	G*VM961005DXB*	47,000	36,000	13.00	11.00	1,620	6994293
	CAPT4961*4A*	A*VC950714CXB*	46,000	35,200	13.00	11.00	1,550	6994300
	CAPT4961*4A*	G*VM970804CNA*	45,000	34,600	13.50	11.30	1,585	7359668
	CAPT4961*4A*+EEP		46,500	35,600	13.00	11.00	1,600	6688388
	CAPT4961*4A*+MBVC1600**-1A*		47,000	36,000	14.00	11.50	1,500	6688389
	CAPT4961*4A*+MBVC2000**-1A*		47,000	36,000	14.00	11.50	1,550	6688390
	CHPF4860D6D*	A*EC961004CNA*	45,500	34,800	13.50	11.50	1,550	7367008
	CHPF4860D6D*	A*EC961205DNA*	45,500	34,800	13.50	11.30	1,525	7367013
	CHPF4860D6D*	G*EC961004CNA*	45,500	34,800	13.50	11.50	1,550	7366902
	CHPF4860D6D*	G*EC961205DNA*	45,500	34,800	13.50	11.30	1,525	7366907
	CHPF4860D6D*+EEP		46,000	35,200	13.00	11.00	1,600	6688391
	CHPF4860D6D*+MBVC2000**-1A*		46,000	35,200	14.00	11.30	1,600	6688392
	CHPF4860D6D*+TXV	A*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6688395

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0481A* (cont.)	CHPF4860D6D*+TXV	A*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359675
	CHPF4860D6D*+TXV	A*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6688398
	CHPF4860D6D*+TXV	A*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359676
	CHPF4860D6D*+TXV	G*EC961205DNA*	45,500	34,800	14.00	11.50	1,525	7366908
	CHPF4860D6D*+TXV	A*EC961004CNA*	45,500	34,800	14.00	11.50	1,550	7367009
	CHPF4860D6D*+TXV	G*VM971205DNA*	46,000	35,200	14.00	11.50	1,575	7359682
	CHPF4860D6D*+TXV	G*E81005C*B*	46,000	35,200	13.50	11.30	1,570	6688402
	CHPF4860D6D*+TXV	G*VC960804CNA*	45,000	34,600	14.00	11.50	1,585	7359677
	CHPF4860D6D*+TXV	AMEH961005DXA*	45,500	34,800	13.70	11.30	1,650	6946190
	CHPF4860D6D*+TXV	G*VM971005CNA*	45,000	34,600	14.00	11.50	1,520	7359681
	CHPF4860D6D*+TXV	A*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6688399
	CHPF4860D6D*+TXV	A*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6688400
	CHPF4860D6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,620	6688405
	CHPF4860D6D*+TXV	G*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359678
	CHPF4860D6D*+TXV	G*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359679
	CHPF4860D6D*+TXV	G*VM960805DXB*	46,000	35,200	14.00	11.30	1,620	6688408
	CHPF4860D6D*+TXV	A*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6688397
	CHPF4860D6D*+TXV	A*EH800805C*A*	46,000	35,200	13.50	11.30	1,650	6946187
	CHPF4860D6D*+TXV	A*VC961205DNA*	46,000	35,200	14.00	11.50	1,575	7359673
	CHPF4860D6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6688404
	CHPF4860D6D*+TXV	A*EH801005C*A*	46,000	35,200	13.50	11.30	1,570	6946188
	CHPF4860D6D*+TXV	A*VM960604CXB*	46,000	35,200	14.00	11.30	1,550	6688396
	CHPF4860D6D*+TXV	G*E80805C*B*	46,000	35,200	13.50	11.30	1,650	6688401
	CHPF4860D6D*+TXV	G*EC961004CNA*	45,500	34,800	14.00	11.50	1,550	7366903
	CHPF4860D6D*+TXV	A*VC961005CNA*	45,000	34,600	14.00	11.50	1,520	7359672
	CHPF4860D6D*+TXV	A*VC960804CNA*	45,000	34,600	14.00	11.50	1,585	7359671
	CHPF4860D6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6688403
	CHPF4860D6D*+TXV	G*VM970804CNA*	45,000	34,600	14.00	11.50	1,585	7359680
	CHPF4860D6D*+TXV	GME951005DXA*	45,500	34,800	13.70	11.30	1,650	6688412
	CHPF4860D6D*+TXV	A*VM970804CNA*	45,000	34,600	14.00	11.50	1,585	7359674
	CHPF4860D6D*+TXV	A*VC950905DXB*	46,000	35,200	14.00	11.30	1,620	6688394
	CHPF4860D6D*+TXV	A*VC950905CXB*	46,000	35,200	14.00	11.30	1,620	6688393
	CHPF4860D6D*+TXV	G*VM961155DXB*	46,000	35,200	14.00	11.30	1,620	6688410
	CHPF4860D6D*+TXV	G*VM961005DXB*	46,000	35,200	14.00	11.30	1,620	6688409
	CHPF4860D6D*+TXV	GME950805CXA*	45,500	34,800	14.00	11.30	1,550	6688411
	CHPF4860D6D*+TXV	AMEH960805CXA*	45,500	34,800	14.00	11.30	1,550	6946189
	CHPF4860D6D*+TXV	A*EC961205DNA*	45,500	34,800	14.00	11.50	1,525	7367014
	CHPF4860D6D*+TXV	G*VM960604CXB*	46,000	35,200	14.00	11.30	1,620	6688406
	CHPF4860D6D*+TXV	G*VM960805CXB*	46,000	35,200	14.00	11.30	1,620	6688407
	CSCF4860N6D*+EEP		46,000	35,200	13.00	11.00	1,600	6688413
	CSCF4860N6D*+TXV	G*VC961005CNA*	44,500	34,200	14.00	11.50	1,520	7359690
	CSCF4860N6D*+TXV	G*VC951155DXB*	46,000	35,200	14.00	11.30	1,550	6688419
	CSCF4860N6D*+TXV	A*VC961205DNA*	45,500	34,800	14.00	11.50	1,575	7359685
	CSCF4860N6D*+TXV	A*VM971205DNA*	45,500	34,800	14.00	11.50	1,575	7359688
	CSCF4860N6D*+TXV	A*VC950905DXB*	46,000	35,200	14.00	11.30	1,575	6688415
	CSCF4860N6D*+TXV	G*VC961205DNA*	45,500	34,800	14.00	11.50	1,575	7359691
	CSCF4860N6D*+TXV	A*VM970804CNA*	44,500	34,200	13.50	11.30	1,585	7359686
	CSCF4860N6D*+TXV	A*VC950905CXB*	46,000	35,200	14.00	11.30	1,575	6688414
	CSCF4860N6D*+TXV	G*VC950905CXB*	46,000	35,200	14.00	11.30	1,575	6688417
	CSCF4860N6D*+TXV	G*VC960804CNA*	44,500	34,200	13.50	11.30	1,585	7359689
	CSCF4860N6D*+TXV	A*VC951155DXB*	46,000	35,200	14.00	11.30	1,550	6688416
	CSCF4860N6D*+TXV	G*VM970804CNA*	44,500	34,200	13.50	11.30	1,585	7359692
	CSCF4860N6D*+TXV	A*VC961005CNA*	44,500	34,200	14.00	11.50	1,520	7359684
	CSCF4860N6D*+TXV	G*VC950905DXB*	46,000	35,200	14.00	11.30	1,575	6688418
	CSCF4860N6D*+TXV	A*VM971005CNA*	44,500	34,200	14.00	11.50	1,520	7359687
	CSCF4860N6D*+TXV	A*VC960804CNA*	44,500	34,200	13.50	11.30	1,585	7359683
	CSCF4860N6D*+TXV	G*VM971205DNA*	45,500	34,800	14.00	11.50	1,575	7359694
	CSCF4860N6D*+TXV	G*VM971005CNA*	44,500	34,200	14.00	11.50	1,520	7359693

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0601A*	ASPT60D14A*		56,000	40,000	13.00	11.00	1,700	6688420
	ASUF59D14A*		54,000	38,500	13.00	11.00	1,580	6688421
	AVPTC60D14A*		56,000	40,000	13.00	11.00	1,750	6688422
	CA*F4961*6D*+EEP		55,500	39,500	13.00	11.00	1,650	6688423
	CA*F4961*6D*+MBVC2000**-1A*		56,000	40,000	13.50	11.50	1,650	6688424
	CA*F4961*6D*+MBVC2000**-1A*+TXV		56,000	40,000	13.50	11.50	1,750	6688425
	CA*F4961*6D*+TXV	A*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359699
	CA*F4961*6D*+TXV	G*VM960805DXB*	55,000	39,000	13.00	11.00	1,700	6688446
	CA*F4961*6D*+TXV	A*VM970804CNA*	54,000	38,500	13.50	11.00	1,585	7359698
	CA*F4961*6D*+TXV	G*E81005C*B*	55,000	39,000	13.30	11.20	1,720	6688437
	CA*F4961*6D*+TXV	G*VM961155DXB*	54,500	38,500	13.40	11.20	1,620	6688448
	CA*F4961*6D*+TXV	G*VC950915DXB*	55,000	39,000	13.00	11.00	1,700	6688443
	CA*F4961*6D*+TXV	G*VC950905CXB*	55,000	39,000	13.00	11.00	1,700	6688441
	CA*F4961*6D*+TXV	A*VM971205DNA*	54,000	38,500	13.50	11.50	1,585	7359700
	CA*F4961*6D*+TXV	G*VC81005C*B*	55,500	39,500	13.30	11.20	1,700	6688439
	CA*F4961*6D*+TXV	A*VC81005C*B*	55,500	39,500	13.30	11.20	1,800	6688427
	CA*F4961*6D*+TXV	G*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359705
	CA*F4961*6D*+TXV	A*VC960804CNA*	54,000	38,500	13.50	11.00	1,585	7359695
	CA*F4961*6D*+TXV	G*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359702
	CA*F4961*6D*+TXV	A*VC951155DXB*	54,500	38,500	13.40	11.20	1,620	6688432
	CA*F4961*6D*+TXV	G*VM971205DNA*	54,000	38,500	13.50	11.50	1,585	7359706
	CA*F4961*6D*+TXV	G*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7366909
	CA*F4961*6D*+TXV	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6688445
	CA*F4961*6D*+TXV	G*VC80805C*B*	55,500	39,500	13.30	11.20	1,700	6688438
	CA*F4961*6D*+TXV	A*VM961155DXB*	54,500	38,500	13.40	11.20	1,620	6688435
	CA*F4961*6D*+TXV	G*VM970804CNA*	54,000	38,500	13.50	11.00	1,585	7359704
	CA*F4961*6D*+TXV	A*VC950905DXB*	55,000	39,000	13.00	11.00	1,700	6688430
	CA*F4961*6D*+TXV	G*VC950905DXB*	55,000	39,000	13.00	11.00	1,700	6688442
	CA*F4961*6D*+TXV	G*VC950714CXB*	55,000	39,000	13.00	11.00	1,700	6688440
	CA*F4961*6D*+TXV	G*VC960804CNA*	54,000	38,500	13.50	11.00	1,585	7359701
	CA*F4961*6D*+TXV	A*VM961005DXB*	54,500	38,500	13.40	11.20	1,620	6688434
	CA*F4961*6D*+TXV	A*VC961205DNA*	54,000	38,500	13.50	11.50	1,585	7359697
	CA*F4961*6D*+TXV	G*VM961005DXB*	54,500	38,500	13.40	11.20	1,620	6688447
	CA*F4961*6D*+TXV	A*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7367015
	CA*F4961*6D*+TXV	A*VC950915DXB*	55,000	39,000	13.00	11.00	1,700	6688431
	CA*F4961*6D*+TXV	G*VC951155DXB*	54,500	38,500	13.40	11.20	1,620	6688444
	CA*F4961*6D*+TXV	A*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359696
	CA*F4961*6D*+TXV	A*VC80805C*B*	55,500	39,500	13.30	11.20	1,800	6688426
	CA*F4961*6D*+TXV	G*VC961205DNA*	54,000	38,500	13.50	11.50	1,585	7359703
	CA*F4961*6D*+TXV	A*VC950714CXB*	55,000	39,000	13.00	11.00	1,700	6688428
	CA*F4961*6D*+TXV	A*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6688433
	CA*F4961*6D*+TXV	A*VC950905CXB*	55,000	39,000	13.00	11.00	1,700	6688429
	CA*F4961*6D*+TXV	G*E80805C*B*	54,500	38,500	13.30	11.20	1,650	6688436
	CAPT4961*4A*	A*VM961155DXB*	54,500	38,500	13.00	11.00	1,660	6688459
	CAPT4961*4A*	G*E80805C*B*	54,500	38,500	13.00	11.00	1,675	6688462
	CAPT4961*4A*	G*VC950905CXB*	55,000	39,000	13.00	11.00	1,560	6688467
	CAPT4961*4A*	G*VC951155DXB*	54,500	38,500	13.00	11.00	1,625	6688470
	CAPT4961*4A*	G*VM971205DNA*	54,000	38,500	13.00	11.00	1,585	7359718
	CAPT4961*4A*	G*E81005C*B*	55,000	39,000	13.00	11.00	1,625	6688463
	CAPT4961*4A*	G*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359714
	CAPT4961*4A*	G*VC960804CNA*	54,000	38,500	13.00	11.00	1,585	7359713
	CAPT4961*4A*	A*VC950905DXB*	55,000	39,000	13.00	11.00	1,560	6688453
	CAPT4961*4A*	A*VM960604CXB*	55,000	39,000	13.00	11.00	1,600	6688456
	CAPT4961*4A*	A*VC81005C*B*	55,500	39,500	13.00	11.00	1,625	6688450
	CAPT4961*4A*	A*VM961005DXB*	54,500	38,500	13.00	11.00	1,530	6688458
	CAPT4961*4A*	G*VC950915DXB*	55,000	39,000	13.00	11.00	1,660	6688469
	CAPT4961*4A*	A*VC950714CXB*	55,000	39,000	13.00	11.00	1,600	6688451
	CAPT4961*4A*	A*VC80805C*B*	55,500	39,500	13.00	11.00	1,625	6688449
	CAPT4961*4A*	G*VC80805C*B*	55,500	39,500	13.00	11.00	1,625	6688464

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0601A* (cont.)	CAPT4961*4A*	A*VC950905CXB*	55,000	39,000	13.00	11.00	1,560	6688452
	CAPT4961*4A*	A*VC951155DXB*	54,500	38,500	13.00	11.00	1,660	6688455
	CAPT4961*4A*	ADVC81005C*B*	55,500	39,500	13.00	11.00	1,625	6688461
	CAPT4961*4A*	A*VC950915DXB*	55,000	39,000	13.00	11.00	1,660	6688454
	CAPT4961*4A*	A*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7367016
	CAPT4961*4A*	A*VC960804CNA*	54,000	38,500	13.00	11.00	1,585	7359707
	CAPT4961*4A*	A*VM970804CNA*	54,000	38,500	13.00	11.00	1,585	7359710
	CAPT4961*4A*	G*VC950714CXB*	55,000	39,000	13.00	11.00	1,600	6688466
	CAPT4961*4A*	G*VM960805DXB*	55,000	39,000	13.00	11.00	1,600	6688473
	CAPT4961*4A*	A*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359711
	CAPT4961*4A*	G*VC81005C*B*	55,500	39,500	13.00	11.00	1,625	6688465
	CAPT4961*4A*	ADVC80805C*B*	55,500	39,500	13.00	11.00	1,625	6688460
	CAPT4961*4A*	G*VM970804CNA*	54,000	38,500	13.00	11.00	1,585	7359716
	CAPT4961*4A*	A*VM960805CXB*	55,000	39,000	13.00	11.00	1,560	6688457
	CAPT4961*4A*	G*VM961005DXB*	54,500	38,500	13.00	11.00	1,625	6688474
	CAPT4961*4A*	A*VC961205DNA*	54,000	38,500	13.00	11.00	1,585	7359709
	CAPT4961*4A*	A*VM971205DNA*	54,000	38,500	13.00	11.00	1,585	7359712
	CAPT4961*4A*	G*VM960604CXB*	55,000	39,000	13.00	11.00	1,600	6688471
	CAPT4961*4A*	A*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359708
	CAPT4961*4A*	G*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7366910
	CAPT4961*4A*	G*VC950905DXB*	55,000	39,000	13.00	11.00	1,560	6688468
	CAPT4961*4A*	G*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359717
	CAPT4961*4A*	G*VC961205DNA*	54,000	38,500	13.00	11.00	1,585	7359715
	CAPT4961*4A*	G*VM961155DXB*	54,500	38,500	13.00	11.00	1,625	6688475
	CAPT4961*4A*	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,600	6688472
	CAPT4961*4A*+MBVC2000**-1A*		56,000	40,000	13.50	11.50	1,625	6688476
	CHPF4860D6D*+EEP+TXV		55,500	39,500	13.00	11.00	1,500	6688477
	CHPF4860D6D*+MBVC2000**-1A*+TXV		56,000	40,000	13.50	11.50	1,625	6688478
	CHPF4860D6D*+TXV	G*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6688495
	CHPF4860D6D*+TXV	G*VC960804CNA*	54,000	38,500	13.50	11.00	1,585	7359725
	CHPF4860D6D*+TXV	A*VC950905CXB*	55,000	39,000	13.00	11.00	1,700	6688481
	CHPF4860D6D*+TXV	G*VM960805DXB*	56,500	40,000	13.00	11.00	1,700	6688496
	CHPF4860D6D*+TXV	G*VC961205DNA*	54,000	38,500	13.50	11.50	1,585	7359727
	CHPF4860D6D*+TXV	A*VC961205DNA*	54,000	38,500	13.50	11.50	1,585	7359721
	CHPF4860D6D*+TXV	G*E80805C*B*	54,500	38,500	13.30	11.20	1,650	6688488
	CHPF4860D6D*+TXV	G*VC950905CXB*	55,000	39,000	13.00	11.00	1,700	6688492
	CHPF4860D6D*+TXV	G*VC951155DXB*	55,000	39,000	13.00	11.00	1,620	6688494
	CHPF4860D6D*+TXV	G*VC950905DXB*	55,500	39,500	13.20	11.00	1,700	6688493
	CHPF4860D6D*+TXV	A*VM970804CNA*	54,000	38,500	13.50	11.00	1,585	7359722
	CHPF4860D6D*+TXV	A*VM960805DXB*	55,000	39,000	13.00	11.00	1,700	6688485
	CHPF4860D6D*+TXV	G*VC80805C*B*	55,500	39,500	13.00	11.00	1,800	6688490
	CHPF4860D6D*+TXV	A*VM961005DXB*	55,000	39,000	13.00	11.00	1,620	6688486
	CHPF4860D6D*+TXV	A*VC950905DXB*	55,000	39,000	13.20	11.00	1,700	6688482
	CHPF4860D6D*+TXV	A*VC951155DXB*	55,000	39,000	13.00	11.00	1,620	6688483
	CHPF4860D6D*+TXV	A*VC81005C*B*	55,500	39,500	13.00	11.00	1,800	6688480
	CHPF4860D6D*+TXV	A*VC80805C*B*	55,500	39,500	13.00	11.00	1,800	6688479
	CHPF4860D6D*+TXV	A*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7367017
	CHPF4860D6D*+TXV	A*VM961155DXB*	55,000	39,000	13.40	11.30	1,620	6688487
	CHPF4860D6D*+TXV	G*VM961155DXB*	55,000	39,000	13.40	11.30	1,620	6688498
	CHPF4860D6D*+TXV	G*VM970804CNA*	54,000	38,500	13.50	11.00	1,585	7359728
	CHPF4860D6D*+TXV	A*VM971205DNA*	54,000	38,500	13.50	11.50	1,585	7359724
	CHPF4860D6D*+TXV	A*VC960804CNA*	54,000	38,500	13.50	11.00	1,585	7359719
	CHPF4860D6D*+TXV	A*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359723
	CHPF4860D6D*+TXV	G*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359726
	CHPF4860D6D*+TXV	A*VM960805CXB*	55,000	39,000	13.00	11.00	1,700	6688484
	CHPF4860D6D*+TXV	G*EC961205DNA*	56,500	40,000	13.00	11.00	1,950	7366911
	CHPF4860D6D*+TXV	G*E81005C*B*	55,000	39,000	13.30	11.20	1,720	6688489
	CHPF4860D6D*+TXV	A*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359720
	CHPF4860D6D*+TXV	G*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359729

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0601A* (cont.)	CHPF4860D6D*+TXV	G*VC81005C*B*	55,500	39,500	13.00	11.00	1,800	6688491
	CHPF4860D6D*+TXV	G*VM971205DNA*	54,000	38,500	13.50	11.50	1,585	7359730
	CHPF4860D6D*+TXV	G*VM961005DXB*	55,000	39,000	13.00	11.00	1,620	6688497
	CSCF4860N6D*+EEP		54,000	38,500	13.00	11.00	1,600	6688499
	CSCF4860N6D*+MBVC2000**-1A*		53,500	38,000	13.50	11.50	1,650	6688500
	CSCF4860N6D*+TXV	G*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359741
	CSCF4860N6D*+TXV	A*VC961205DNA*	53,500	38,000	13.50	11.00	1,585	7359733
	CSCF4860N6D*+TXV	A*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359732
	CSCF4860N6D*+TXV	G*VC961205DNA*	53,500	38,000	13.50	11.00	1,585	7359739
	CSCF4860N6D*+TXV	A*VM970804CNA*	54,000	38,500	13.00	11.00	1,585	7359734
	CSCF4860N6D*+TXV	G*VM970804CNA*	54,000	38,500	13.00	11.00	1,585	7359740
	CSCF4860N6D*+TXV	G*VC961005CNA*	54,000	38,500	13.00	11.00	1,600	7359738
	CSCF4860N6D*+TXV	A*VC960804CNA*	54,000	38,500	13.00	11.00	1,585	7359731
	CSCF4860N6D*+TXV	A*VM971005CNA*	54,000	38,500	13.00	11.00	1,600	7359735
	CSCF4860N6D*+TXV	G*VC960804CNA*	54,000	38,500	13.00	11.00	1,585	7359737
	CSCF4860N6D*+TXV	G*VM971205DNA*	53,500	38,000	13.50	11.00	1,585	7359742
	CSCF4860N6D*+TXV	A*VM971205DNA*	53,500	38,000	13.50	11.00	1,585	7359736
ANX13 0611A*	ARPT48D14A*		54,500	37,400	13.00	11.00	1,500	6688501
	ARPT60D14A*		55,000	37,600	13.00	11.00	1,500	6688502
	ARUF48D14A*		54,500	37,400	13.00	11.00	1,500	6688503
	ARUF60D14A*		55,000	37,600	13.00	11.00	1,500	6688504
	ASPT60D14A*		56,000	38,500	14.00	11.50	1,600	6688505
	ASUF49C14A*		51,500	35,200	13.00	11.00	1,435	6688506
	ASUF49C14A*+TXV		51,500	35,200	13.20	11.00	1,435	6688507
	ASUF59D14A*		56,000	38,500	13.50	11.00	1,580	6688508
	ASUF59D14A*+TXV		56,000	38,500	14.00	11.50	1,600	6688509
	AVPTC60D14A*		56,000	38,500	14.00	11.50	1,620	6688510
	CA*F4860*6D*+EEP		55,000	37,600	13.00	11.00	1,500	6688511
	CA*F4860*6D*+MBVC2000**-1A*		56,000	38,500	13.50	11.50	1,575	6688512
	CA*F4860*6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.00	11.50	1,575	6688513
	CA*F4860*6D*+TXV	G*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6688536
	CA*F4860*6D*+TXV	A*EH801005C*A*	55,000	37,600	13.50	11.00	1,525	6946192
	CA*F4860*6D*+TXV	G*VC951155DXB*	55,000	37,600	13.00	11.00	1,550	6688533
	CA*F4860*6D*+TXV	G*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6688529
	CA*F4860*6D*+TXV	A*VC80805C*B*	55,500	38,000	13.50	11.00	1,520	6688514
	CA*F4860*6D*+TXV	ADVC81005C*B*	55,500	38,000	13.00	11.00	1,550	6688525
	CA*F4860*6D*+TXV	AMEH961005DXA*	55,000	37,600	13.50	11.00	1,500	6946194
	CA*F4860*6D*+TXV	ADVC80805C*B*	55,500	38,000	13.00	11.00	1,500	6688524
	CA*F4860*6D*+TXV	GME951005DXA*	55,000	37,600	13.50	11.00	1,500	6688539
	CA*F4860*6D*+TXV	A*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6688523
	CA*F4860*6D*+TXV	G*E80805C*B*	55,500	38,000	13.00	11.00	1,550	6688526
	CA*F4860*6D*+TXV	A*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688521
	CA*F4860*6D*+TXV	G*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688532
	CA*F4860*6D*+TXV	A*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6688515
	CA*F4860*6D*+TXV	A*VC950905CXB*	55,500	38,000	13.00	11.00	1,460	6688516
	CA*F4860*6D*+TXV	A*VC951155DXB*	55,000	37,600	13.00	11.00	1,550	6688519
	CA*F4860*6D*+TXV	A*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6688520
	CA*F4860*6D*+TXV	G*VC950905DXB*	55,500	38,000	13.50	11.00	1,460	6688531
	CA*F4860*6D*+TXV	G*VC950905CXB*	55,500	38,000	13.00	11.00	1,460	6688530
	CA*F4860*6D*+TXV	A*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688518
	CA*F4860*6D*+TXV	A*EH800805C*A*	55,500	38,000	13.00	11.00	1,550	6946191
	CA*F4860*6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6688537
	CA*F4860*6D*+TXV	G*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6688534
	CA*F4860*6D*+TXV	A*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6688522
	CA*F4860*6D*+TXV	G*VC80805C*B*	55,500	38,000	13.50	11.00	1,520	6688528
	CA*F4860*6D*+TXV	GME950805CXA*	55,000	37,600	13.00	11.00	1,475	6688538
	CA*F4860*6D*+TXV	AMEH960805CXA*	55,000	37,600	13.00	11.00	1,475	6946193
	CA*F4860*6D*+TXV	G*E81005C*B*	55,000	37,600	13.50	11.00	1,525	6688527
	CA*F4860*6D*+TXV	G*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688535
	CA*F4860*6D*+TXV	A*VC950905DXB*	55,500	38,000	13.50	11.00	1,460	6688517

See Notes on Page 52.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0611A* (cont.)	CA*F4961*6D*+EEP		56,500	38,500	13.00	11.00	1,500	6688540
	CA*F4961*6D*+MBVC2000**-1A*		57,000	39,000	14.00	11.50	1,575	6688541
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.00	12.00	1,575	6688542
	CA*F4961*6D*+TXV	AMEH960805CXA*	56,000	38,500	13.50	11.00	1,475	6946197
	CA*F4961*6D*+TXV	AMEH961005DXA*	56,000	38,500	14.00	11.50	1,500	6946198
	CA*F4961*6D*+TXV	G*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6688560
	CA*F4961*6D*+TXV	G*E80805C*B*	56,000	38,500	14.00	11.50	1,550	6688555
	CA*F4961*6D*+TXV	G*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688564
	CA*F4961*6D*+TXV	A*VM961155DXB*	56,000	38,500	14.00	11.50	1,550	6688552
	CA*F4961*6D*+TXV	G*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688566
	CA*F4961*6D*+TXV	A*EH800805C*A*	56,000	38,500	14.00	11.50	1,550	6946195
	CA*F4961*6D*+TXV	G*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6688565
	CA*F4961*6D*+TXV	ADVC80805C*B*	57,000	39,000	13.50	11.00	1,500	6688553
	CA*F4961*6D*+TXV	G*VC961005CNA*	56,000	38,500	13.50	11.50	1,520	7359747
	CA*F4961*6D*+TXV	ADVC81005C*B*	57,000	39,000	13.50	11.00	1,550	6688554
	CA*F4961*6D*+TXV	GME951005DXA*	56,000	38,500	14.00	11.50	1,500	6688569
	CA*F4961*6D*+TXV	A*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6688550
	CA*F4961*6D*+TXV	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688563
	CA*F4961*6D*+TXV	G*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6688562
	CA*F4961*6D*+TXV	G*VC961205DNA*	56,000	38,500	14.00	11.50	1,545	7359748
	CA*F4961*6D*+TXV	G*VM961155DXB*	56,000	38,500	13.50	11.00	1,550	6688567
	CA*F4961*6D*+TXV	A*VM971205DNA*	56,000	38,500	14.00	11.50	1,545	7359746
	CA*F4961*6D*+TXV	A*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6688543
	CA*F4961*6D*+TXV	A*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688549
	CA*F4961*6D*+TXV	G*VM971005CNA*	56,000	38,500	13.50	11.50	1,520	7359749
	CA*F4961*6D*+TXV	G*E81005C*B*	56,000	38,500	14.00	11.50	1,525	6688556
	CA*F4961*6D*+TXV	A*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688551
	CA*F4961*6D*+TXV	A*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688548
	CA*F4961*6D*+TXV	G*VM971205DNA*	56,000	38,500	14.00	11.50	1,545	7359750
	CA*F4961*6D*+TXV	G*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688558
	CA*F4961*6D*+TXV	GME950805CXA*	56,000	38,500	13.50	11.00	1,475	6688568
	CA*F4961*6D*+TXV	A*VC961205DNA*	56,000	38,500	14.00	11.50	1,545	7359744
	CA*F4961*6D*+TXV	G*EC961205DNA*	56,000	38,500	14.00	11.50	1,525	7366912
	CA*F4961*6D*+TXV	A*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688544
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6688557
	CA*F4961*6D*+TXV	A*EH801005C*A*	56,000	38,500	14.00	11.50	1,525	6946196
	CA*F4961*6D*+TXV	A*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6688547
	CA*F4961*6D*+TXV	A*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6688546
	CA*F4961*6D*+TXV	A*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6688545
	CA*F4961*6D*+TXV	G*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6688561
	CA*F4961*6D*+TXV	A*VM971005CNA*	56,000	38,500	13.50	11.50	1,520	7359745
	CA*F4961*6D*+TXV	G*VC91155DXA*	56,000	38,500	13.00	11.00	1,550	6688559
	CA*F4961*6D*+TXV	A*VC961005CNA*	56,000	38,500	13.50	11.50	1,520	7359743
	CA*F4961*6D*+TXV	A*EC961205DNA*	56,000	38,500	14.00	11.50	1,525	7367018
	CAPT4961*4A*	GME950805CXA*	56,000	38,500	13.50	11.00	1,475	6688595
	CAPT4961*4A*	A*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688576
	CAPT4961*4A*	ADVC81005C*B*	57,000	39,000	13.50	11.00	1,550	6688581
	CAPT4961*4A*	A*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6688573
	CAPT4961*4A*	A*EH801005C*A*	56,000	38,500	14.00	11.50	1,525	6946200
	CAPT4961*4A*	GME951005DXA*	56,000	38,500	14.00	11.50	1,500	6688596
	CAPT4961*4A*	G*VC961005CNA*	56,000	38,500	13.50	11.00	1,520	7359755
	CAPT4961*4A*	G*VM971205DNA*	56,000	38,500	13.50	11.50	1,545	7359758
	CAPT4961*4A*	ADVC80805C*B*	57,000	39,000	13.50	11.00	1,500	6688580
	CAPT4961*4A*	G*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688585
	CAPT4961*4A*	G*VC91155DXA*	56,000	38,500	13.50	11.00	1,550	6688586
	CAPT4961*4A*	A*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688575
	CAPT4961*4A*	G*VC961205DNA*	56,000	38,500	13.50	11.50	1,545	7359756
	CAPT4961*4A*	A*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6688574
	CAPT4961*4A*	A*EH800805C*A*	56,000	38,500	14.00	11.50	1,550	6946199
	CAPT4961*4A*	G*VC950704CXB*	57,000	39,000	13.00	11.00	1,450	6994341

See Notes on Page 52.


OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0611A* (cont.)	CAPT4961*4A*	G*VC950714CXB*	57,000	39,000	13.00	11.00	1,530	6994342
	CAPT4961*4A*	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688590
	CAPT4961*4A*	A*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6688577
	CAPT4961*4A*	A*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6688570
	CAPT4961*4A*	A*VM971205DNA*	56,000	38,500	13.50	11.50	1,545	7359754
	CAPT4961*4A*	A*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688571
	CAPT4961*4A*	G*VM971005CNA*	56,000	38,500	13.50	11.00	1,520	7359757
	CAPT4961*4A*	A*VC961205DNA*	56,000	38,500	13.50	11.50	1,545	7359752
	CAPT4961*4A*	G*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688593
	CAPT4961*4A*	A*VM961155DXB*	56,000	38,500	14.00	11.50	1,550	6688579
	CAPT4961*4A*	G*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6688587
	CAPT4961*4A*	A*EC961205DNA*	56,000	38,500	13.50	11.50	1,525	7367019
	CAPT4961*4A*	AMEH960805CXA*	56,000	38,500	13.50	11.00	1,475	6946201
	CAPT4961*4A*	A*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688578
	CAPT4961*4A*	G*VC80805C*B*	56,500	38,500	14.00	11.50	1,520	6688584
	CAPT4961*4A*	AMEH961005DXA*	56,000	38,500	14.00	11.50	1,500	6946202
	CAPT4961*4A*	G*VM960805DXB*	56,500	38,500	13.50	11.00	1,460	6688592
	CAPT4961*4A*	G*E81005C*B*	56,000	38,500	14.00	11.50	1,525	6688583
	CAPT4961*4A*	A*VC950905CXB*	56,500	38,500	13.50	11.00	1,460	6688572
	CAPT4961*4A*	A*VC961005CNA*	56,000	38,500	13.50	11.00	1,520	7359751
	CAPT4961*4A*	G*VC950915DXB*	56,000	38,500	13.50	11.00	1,575	6688589
	CAPT4961*4A*	A*VC950704CXB*	57,000	39,000	13.00	11.00	1,450	6994343
	CAPT4961*4A*	G*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6688588
	CAPT4961*4A*	A*VM971005CNA*	56,000	38,500	13.50	11.00	1,520	7359753
	CAPT4961*4A*	G*EC961205DNA*	56,000	38,500	13.50	11.50	1,525	7366913
	CAPT4961*4A*	A*VC950714CXB*	57,000	39,000	13.00	11.00	1,530	6994344
	CAPT4961*4A*	G*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688591
	CAPT4961*4A*	G*E80805C*B*	56,000	38,500	14.00	11.50	1,550	6688582
	CAPT4961*4A*	G*VM961155DXB*	56,000	38,500	13.50	11.00	1,550	6688594
	CAPT4961*4A*+EPP		56,500	38,500	13.50	11.00	1,500	6688597
	CAPT4961*4A*+MBVC1600**-1A*		57,000	39,000	13.50	11.50	1,560	6994345
	CAPT4961*4A*+MBVC2000**-1A*		57,000	39,000	14.00	12.00	1,575	6688598
	CHPF4860D6D*+EPP		56,000	38,500	13.00	11.00	1,500	6688599
	CHPF4860D6D*+MBVC2000**-1A*		57,000	39,000	14.00	11.50	1,575	6688600
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.00	11.50	1,575	6688601
	CHPF4860D6D*+TXV	G*VM971005CNA*	56,000	38,500	13.50	11.00	1,520	7359765
	CHPF4860D6D*+TXV	A*VC961005CNA*	56,000	38,500	13.50	11.00	1,520	7359759
	CHPF4860D6D*+TXV	A*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688603
	CHPF4860D6D*+TXV	G*VC950905CXB*	56,000	38,500	13.50	11.00	1,460	6688617
	CHPF4860D6D*+TXV	A*VM961155DXB*	56,000	38,500	14.00	11.50	1,550	6688611
	CHPF4860D6D*+TXV	A*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688606
	CHPF4860D6D*+TXV	G*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688619
	CHPF4860D6D*+TXV	A*VC950905CXB*	56,000	38,500	13.50	11.00	1,460	6688604
	CHPF4860D6D*+TXV	G*EC961205DNA*	56,000	38,500	14.00	11.50	1,525	7366914
	CHPF4860D6D*+TXV	A*EH800805C*A*	56,000	38,500	14.00	11.50	1,550	6946203
	CHPF4860D6D*+TXV	GME950805CXA*	56,000	38,500	13.00	11.00	1,475	6688625
	CHPF4860D6D*+TXV	G*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688620
	CHPF4860D6D*+TXV	G*VC81005C*B*	56,500	38,500	14.00	11.50	1,520	6688615
	CHPF4860D6D*+TXV	G*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688621
	CHPF4860D6D*+TXV	A*VM971205DNA*	56,000	38,500	14.00	11.50	1,545	7359762
	CHPF4860D6D*+TXV	A*EH801005C*A*	56,000	38,500	14.00	11.50	1,525	6946204
	CHPF4860D6D*+TXV	G*VC961005CNA*	56,000	38,500	13.50	11.00	1,520	7359763
	CHPF4860D6D*+TXV	GME951005DXA*	56,000	38,500	14.00	11.50	1,500	6688626
	CHPF4860D6D*+TXV	AMEH961005DXA*	56,000	38,500	14.00	11.50	1,500	6946206
	CHPF4860D6D*+TXV	A*VC951155DXB*	56,000	38,500	14.00	11.50	1,550	6688607
	CHPF4860D6D*+TXV	G*VC950905DXB*	56,500	38,500	14.00	11.50	1,460	6688618
	CHPF4860D6D*+TXV	G*VM971205DNA*	56,000	38,500	14.00	11.50	1,545	7359766
	CHPF4860D6D*+TXV	A*VC950905DXB*	56,000	38,500	14.00	11.50	1,460	6688605
	CHPF4860D6D*+TXV	G*VC91155DXA*	56,000	38,500	13.00	11.00	1,550	6688616
	CHPF4860D6D*+TXV	A*VC961205DNA*	56,000	38,500	14.00	11.50	1,545	7359760

See Notes on Page 52.


OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0611A* (cont.)	CHPF4860D6D*+TXV	G*E81005C*B*	56,000	38,500	14.00	11.50	1,525	6688613
	CHPF4860D6D*+TXV	A*VC80805C*B*	56,000	38,500	14.00	11.50	1,520	6688602
	CHPF4860D6D*+TXV	G*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688622
	CHPF4860D6D*+TXV	G*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688623
	CHPF4860D6D*+TXV	A*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688609
	CHPF4860D6D*+TXV	A*VM960805CXB*	56,500	38,500	13.50	11.00	1,460	6688608
	CHPF4860D6D*+TXV	G*E80805C*B*	56,000	38,500	14.00	11.50	1,550	6688612
	CHPF4860D6D*+TXV	G*VC961205DNA*	56,000	38,500	14.00	11.50	1,545	7359764
	CHPF4860D6D*+TXV	A*EC961205DNA*	56,000	38,500	14.00	11.50	1,525	7367020
	CHPF4860D6D*+TXV	A*VM971005CNA*	56,000	38,500	13.50	11.00	1,520	7359761
	CHPF4860D6D*+TXV	G*VC80805C*B*	56,000	38,500	14.00	11.50	1,520	6688614
	CHPF4860D6D*+TXV	AMEH960805CXA*	56,000	38,500	13.00	11.00	1,475	6946205
	CHPF4860D6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6688624
	CHPF4860D6D*+TXV	A*VM961005DXB*	56,000	38,500	14.00	11.50	1,550	6688610
	CSCF4860N6D*+EEP		55,000	37,600	13.00	11.00	1,500	6688627
	CSCF4860N6D*+MBVC2000**-1A*		56,000	38,500	13.50	11.50	1,575	6688628
	CSCF4860N6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.00	11.50	1,575	6688629
	CSCF4860N6D*+TXV	G*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6688643
	CSCF4860N6D*+TXV	A*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6688638
	CSCF4860N6D*+TXV	G*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6688645
	CSCF4860N6D*+TXV	G*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688644
	CSCF4860N6D*+TXV	A*VC81005C*B*	55,500	38,000	13.50	11.00	1,520	6688631
	CSCF4860N6D*+TXV	G*VC961005CNA*	55,500	38,000	13.50	11.00	1,520	7359771
	CSCF4860N6D*+TXV	A*VM971205DNA*	55,500	38,000	13.50	11.00	1,545	7359770
	CSCF4860N6D*+TXV	A*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6688639
	CSCF4860N6D*+TXV	G*VM961155DXB*	55,000	37,600	13.50	11.00	1,550	6688648
	CSCF4860N6D*+TXV	A*VC950905DXB*	55,000	37,600	13.50	11.00	1,475	6688633
	CSCF4860N6D*+TXV	A*VC951155DXB*	55,000	37,600	13.50	11.00	1,550	6688635
	CSCF4860N6D*+TXV	A*EH801005C*A*	55,500	38,000	13.50	11.00	1,525	6946208
	CSCF4860N6D*+TXV	A*VC950905CXB*	55,000	37,600	13.50	11.00	1,475	6688632
	CSCF4860N6D*+TXV	A*VM960805CXB*	55,500	38,000	13.00	11.00	1,460	6688636
	CSCF4860N6D*+TXV	G*E81005C*B*	55,500	38,000	13.50	11.00	1,525	6688641
	CSCF4860N6D*+TXV	GME950805CXA*	55,000	37,600	13.00	11.00	1,475	6688649
	CSCF4860N6D*+TXV	G*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688646
	CSCF4860N6D*+TXV	A*EH800805C*A*	54,500	37,400	13.00	11.00	1,550	6946207
	CSCF4860N6D*+TXV	A*VC80805C*B*	56,500	38,500	13.50	11.50	1,520	6688630
	CSCF4860N6D*+TXV	A*VC961005CNA*	55,500	38,000	13.50	11.00	1,520	7359767
	CSCF4860N6D*+TXV	A*VM971005CNA*	55,500	38,000	13.50	11.00	1,520	7359769
	CSCF4860N6D*+TXV	G*VM971205DNA*	55,500	38,000	13.50	11.00	1,545	7359774
	CSCF4860N6D*+TXV	GME951005DXA*	55,000	37,600	13.50	11.00	1,500	6688650
	CSCF4860N6D*+TXV	G*E80805C*B*	54,500	37,400	13.00	11.00	1,550	6688640
	CSCF4860N6D*+TXV	AMEH961005DXA*	55,000	37,600	13.50	11.00	1,500	6946210
	CSCF4860N6D*+TXV	A*VM960805DXB*	55,500	38,000	13.00	11.00	1,460	6688637
	CSCF4860N6D*+TXV	A*VC950915DXB*	55,000	37,600	13.00	11.00	1,575	6688634
	CSCF4860N6D*+TXV	AMEH960805CXA*	55,000	37,600	13.00	11.00	1,475	6946209
	CSCF4860N6D*+TXV	G*VM961005DXB*	55,000	37,600	13.50	11.00	1,550	6688647
	CSCF4860N6D*+TXV	A*VC961205DNA*	55,500	38,000	13.50	11.00	1,545	7359768
	CSCF4860N6D*+TXV	G*VM971005CNA*	55,500	38,000	13.50	11.00	1,520	7359773
	CSCF4860N6D*+TXV	G*VC80805C*B*	56,500	38,500	13.50	11.50	1,520	6688642
	CSCF4860N6D*+TXV	G*VC961205DNA*	55,500	38,000	13.50	11.00	1,545	7359772

¹ BTU/h² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

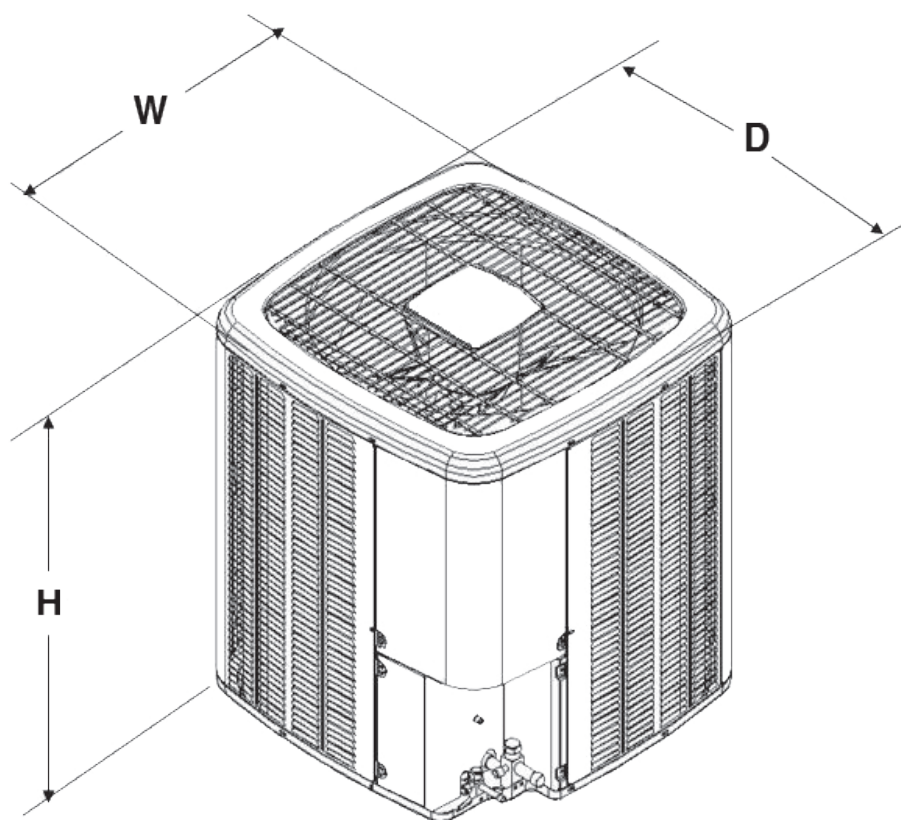

MODEL	DIMENSIONS		
	W"	D"	H"
ANX130181A*	26	26	27½
ANX130241A*	26	26	27½
ANX130301A*	26	26	27½
ANX130361A*	26	26	27½
ANX130421A*	29	29	36¼
ANX130481A*	29	29	36¼
ANX130601A*	29	29	40
ANX130611A*	35½	35½	38¼

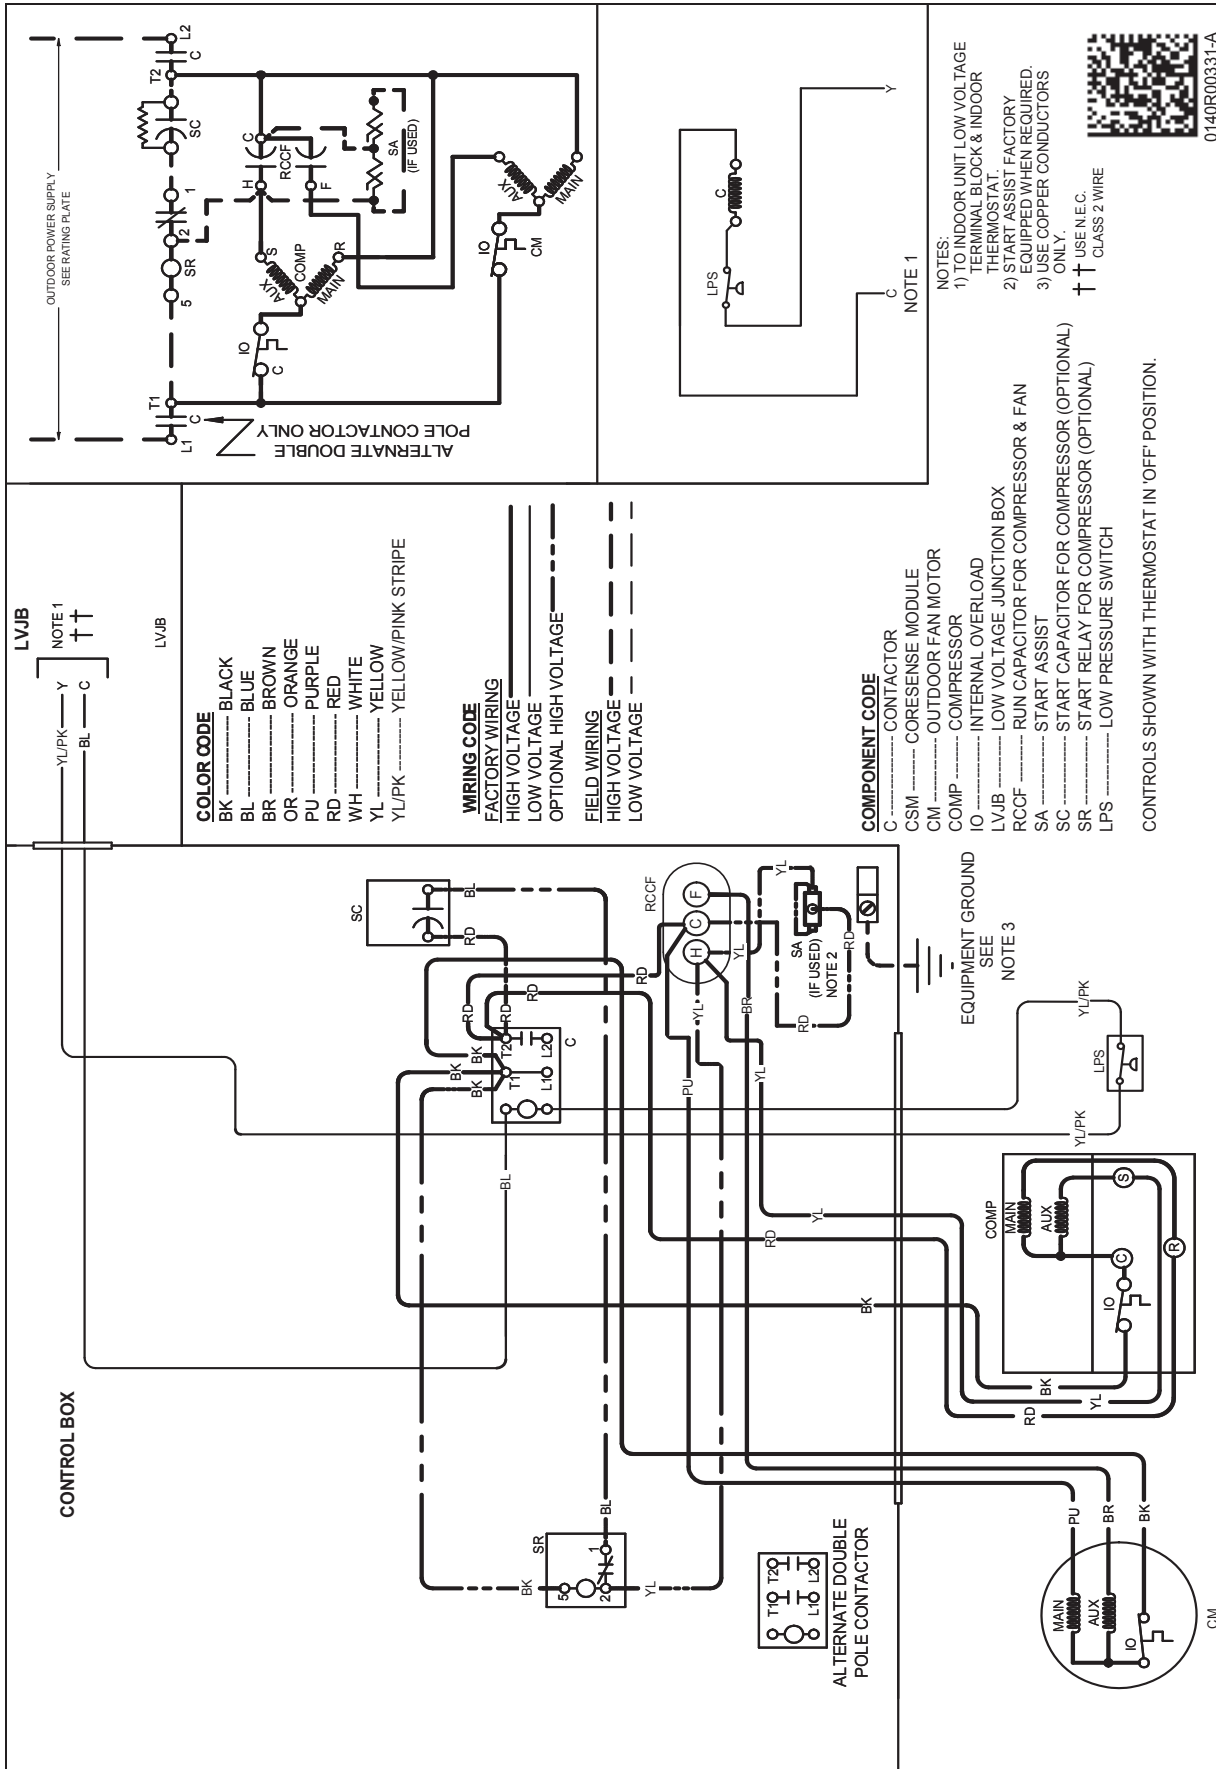

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

